


# Survey & Design Workshop For Ukraine KS Project

**ZTE**  
Tomorrow never waits

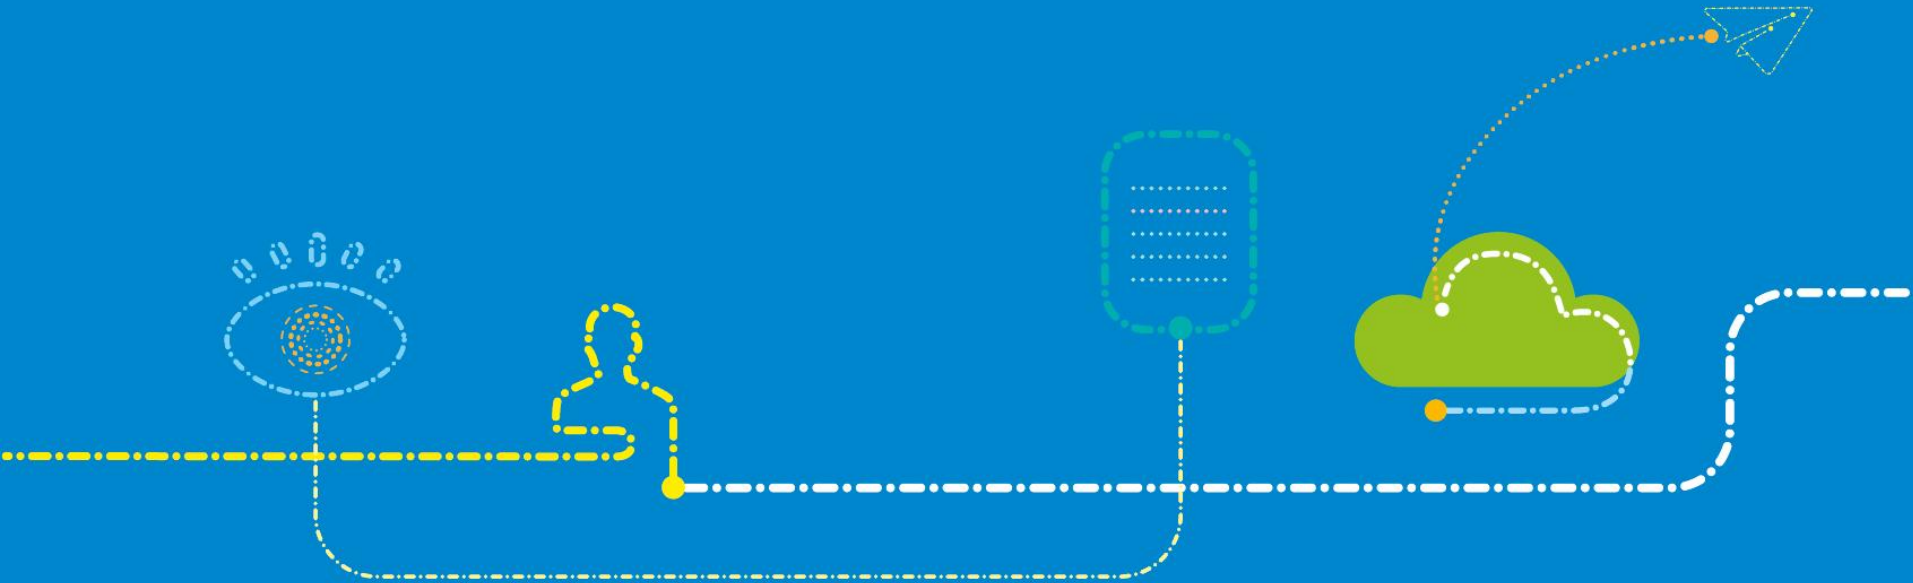

# Contents


 **TSSR output Procedure**

 ZTE Equipment Description


 Engineering scenarios



# TSSR output procedure

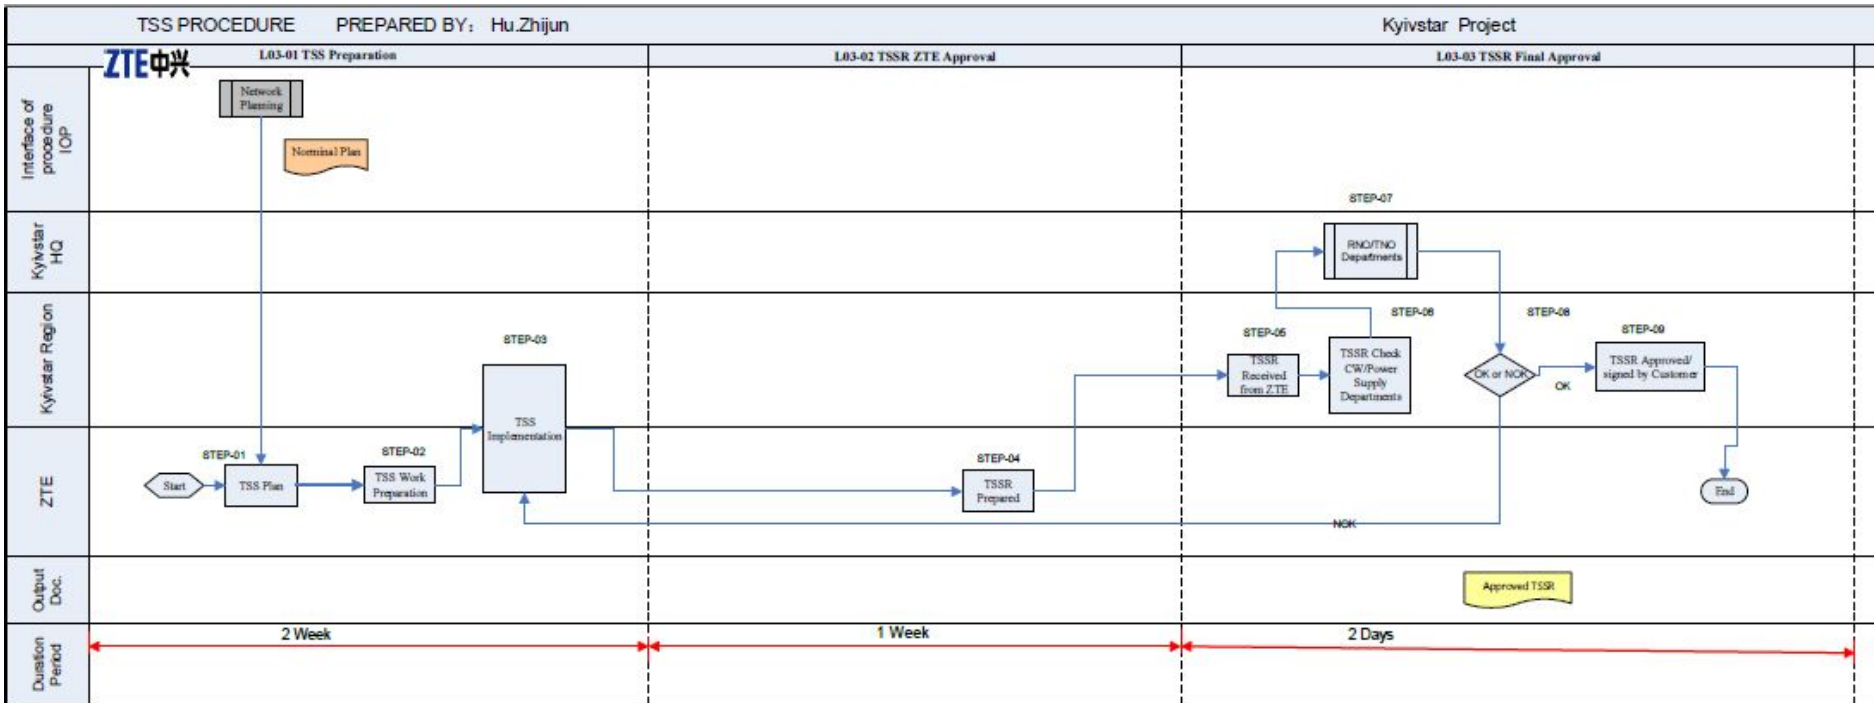

# TSSR output procedure

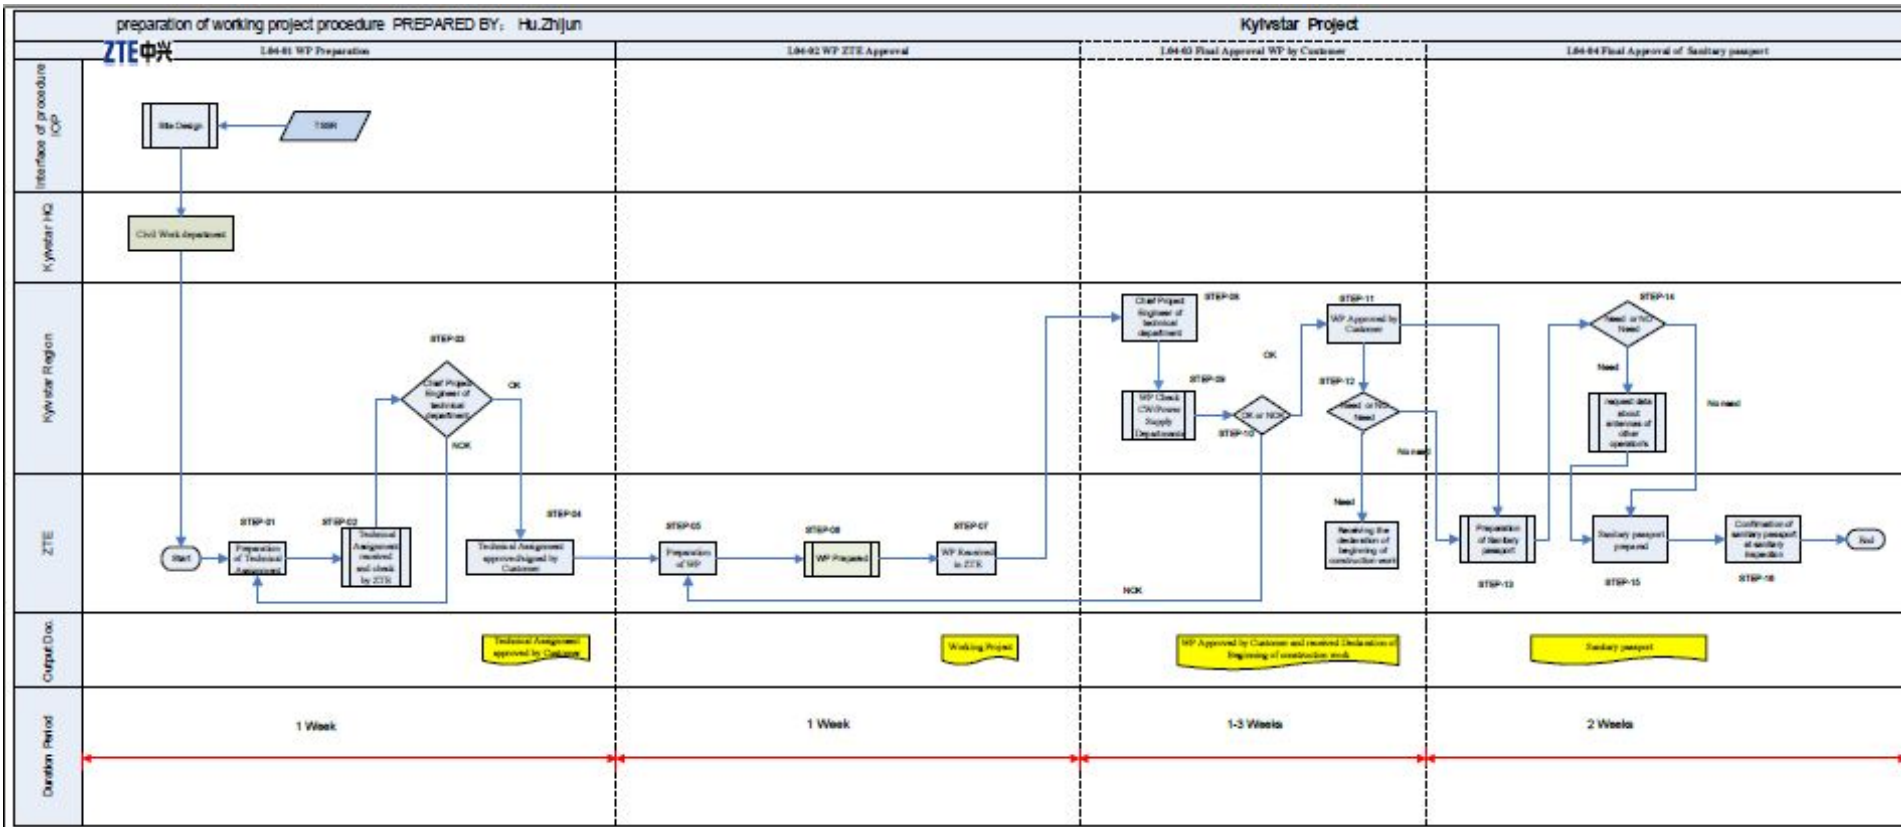

# Contents



TSSR output Procedure



**ZTE Equipment Description**



Engineering scenarios




# Product Description – ZTE (-48V ) DC system 2000mm rack

## ■ DC power solution scenario


- In case of only existing +24V DC power rack,  
no -48V DC power on site;
- In case of cable tray height is **more than**  
**2000mm**

## ■ ZTE -48V DC Power

- ZXDUPA-FR01 Frame rack 2000mm
- ZXDU68 B301(V5.0R01M01) DC power  
system
- Rack Height:2000mm
- Dimension of floor  
space:600mm\*573mm
- AC breaker requirement: 16A-TP

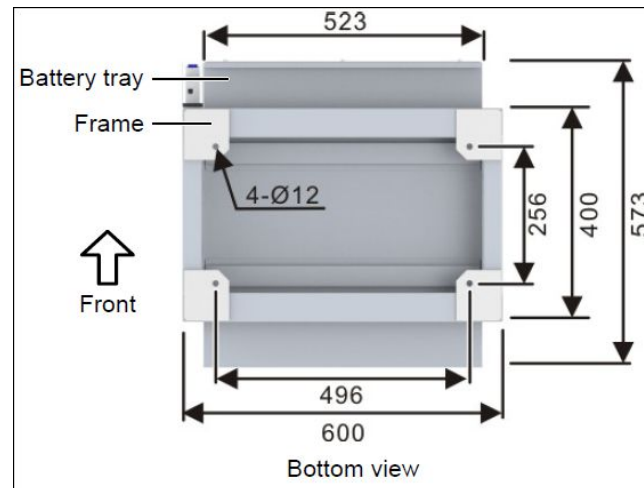

**Floor space of ZXDUPA-FR01**

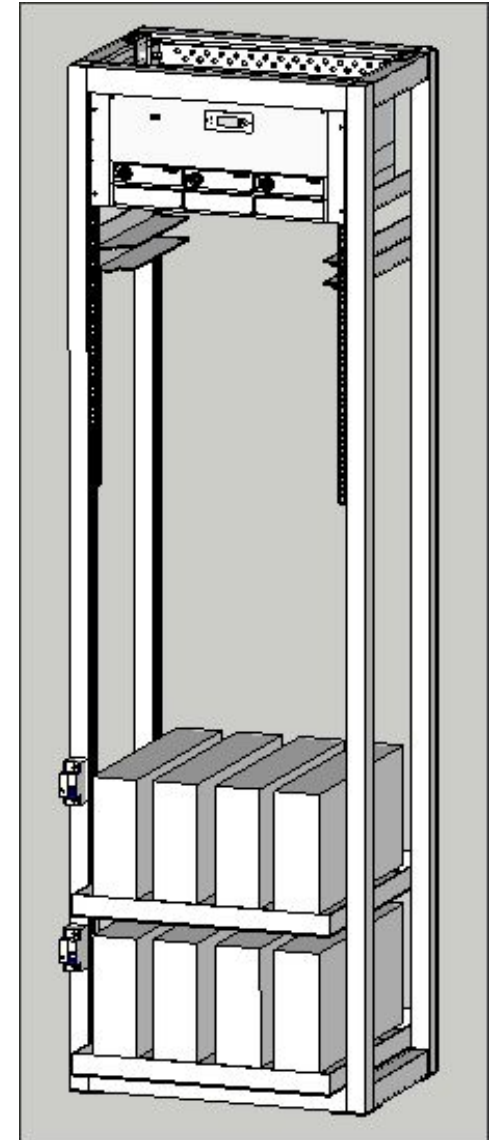


# Product Description – ZTE (-48V ) DC system 1600mm rack

## ■ DC power solution scenario


- In case of only existing +24V DC power rack, no -48V DC power on site;
- In case of cable tray height is **less than 2000mm**
- **For PO1(132 sites) there is no 1.6m rack.**

## ■ ZTE -48V DC Power


- ZXDUPA-FR01 Frame rack 2000mm
- ZXDU68 B301(V5.0R01M01) DC power system
- Rack Height: 1600mm
- Dimension of floor space: 600mm\*573mm
- AC breaker requirement: 16A-TP

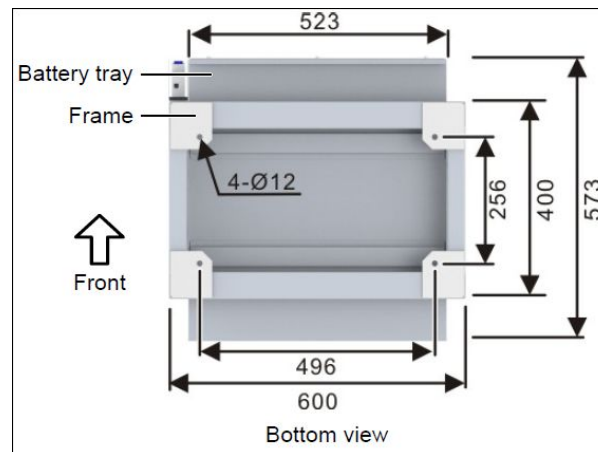

**Floor space of ZXDUPA-FR01**

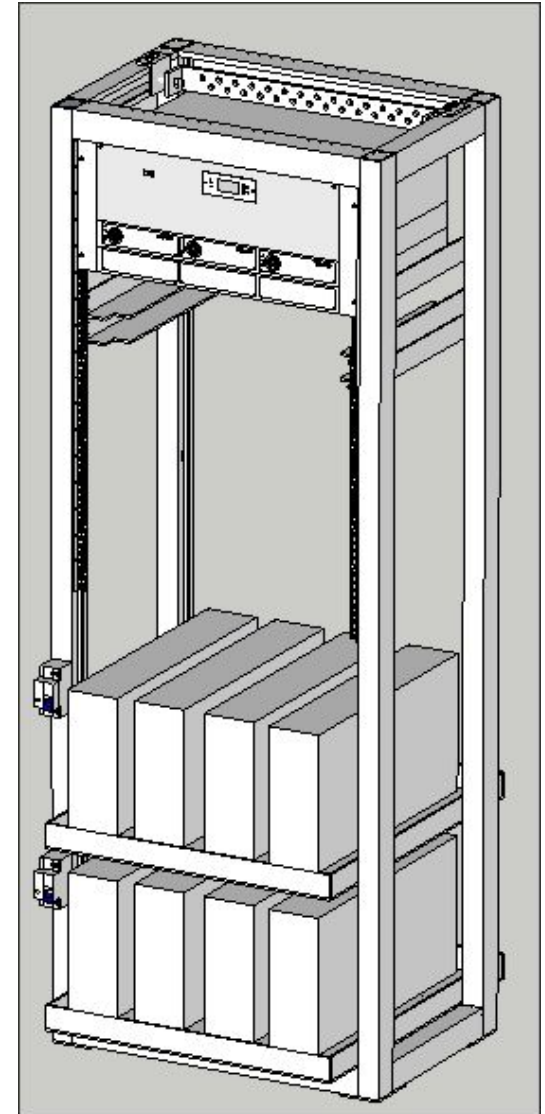

# Product Description – BBU B8200

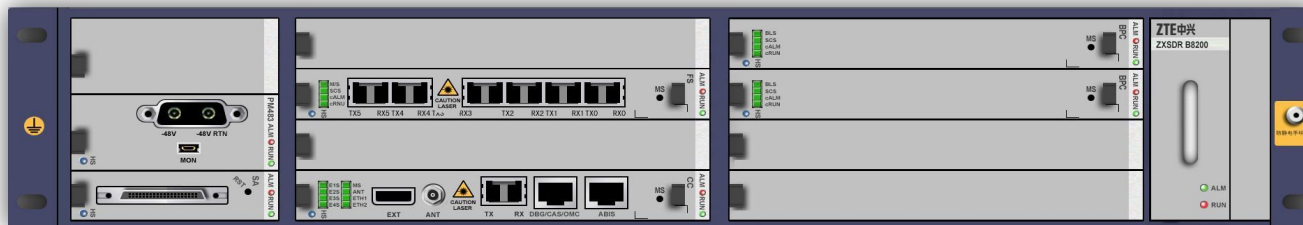


## Specifications of B8200

Dimension	88.4mm(H) x 482.6mm(W) x 197(D)
Weight	8.75kg
Typical Power consumption	240W
DC Requirement	10A



# DCPD6

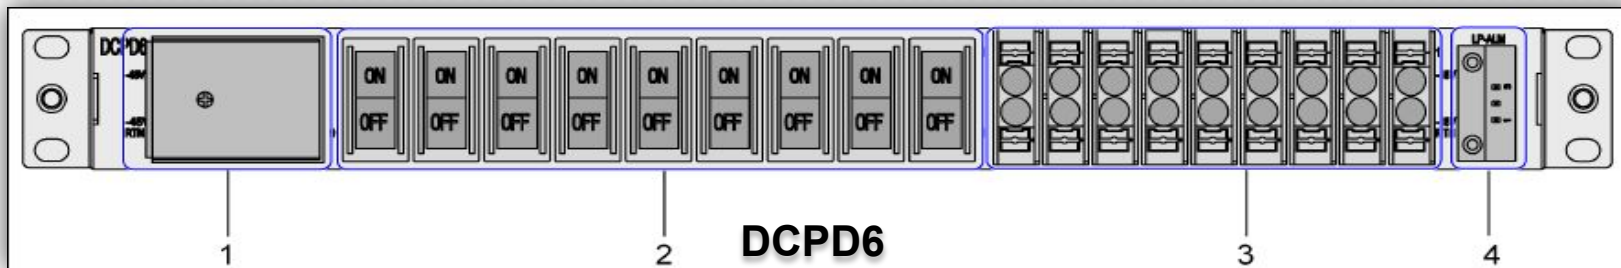

- 1,DC input interface
- 2,Switch for DC output for 9 paths(20A\*9 paths)
- 3,Connector for DC output 9 paths
- 4,LP\_ALM provides lighting protection alarm(Dry contact output)

Dimensions: 43.6 (h) x 482.6 (w) x 228 (d)  
 (That means 1U space standard)  
 Weight: 5.0kg

**Maximum (6 RRUs)+(1 BBU) to be connected to a single DCPD6.**


Notes:

- 1,The 6 RRUs mentioned not include R8863, **R8863 should not be connected to DCPD6 because of single R8863 got big power consumption.**
- 2, 63A breaker in DC power system needed for DCPD6.

**We can find site wise DCPD configuration in ZTE input data.**

# DCPD7

Figure 2-2 Interfaces on the Panel of a DCPD7 Product

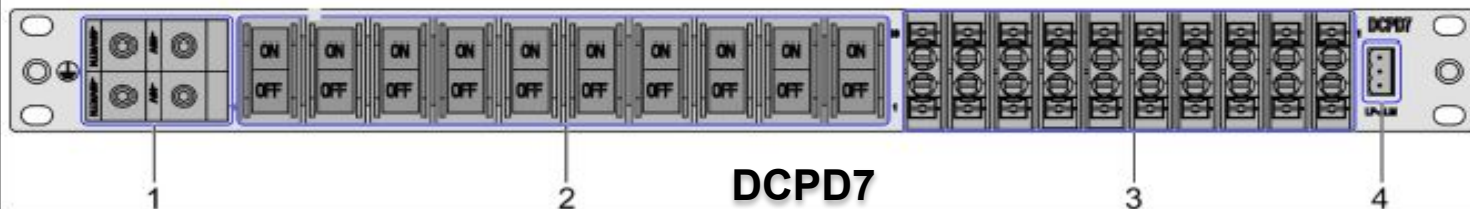

- 1,DC input interface
- 2,Switch for DC output for 10 paths(25A\*10 paths)
- 3,Connector for DC output 10 paths
- 4,LP\_ALM provides lighting protection alarm(Dry contact output)

Dimensions: 43.6 (h) x 482.6 (w) x 228 (d)  
 (That means 1U space standard)  
 Weight: 5.0kg

## Maximum (4 R8863)+(1 BBU) to be connected to a single DCPD7

### Notes:

- 1, The R8863 **only** can be connected to DCPD7, not DCPD6.
- 2, Other RRUs also can be connected to DCPD7, as a sample, **(3 R8863)+(2 other RRUs)+(1 BBU) or (2 R8863)+(3 other RRUs)+(1 BBU)** . (The mentioned “other RRUs” include all types RRU except R8863.
- 3, 63A breaker in DC power system for DCPD7 needed.

**We can find site wise DCPD configuration in ZTE input data.**

# Product Description – RRU (RRU types)


System	GSM900M			DCS1800M		UMTS2100M	
RRU type	ZXSDR R8861 S9000(DC 925-35)	ZXSDR R8881 S9000(DC 925-35)	ZXSDR R8863 S9000(DC 925-35)	ZXSDR R8862 S1800(DC 1805-75)	ZXSDR R8863 S1800	ZXSDR R8861 S2100(DC 2110-60 EB)	ZXSDR R8863 S2100 (DC 2110-60)

**R8863 will not be configured for RT Pole(Separate pole for each sector)**

Power Cable Size	Max. cable run for R8881	Max. cable run for R8861	Max. cable run for R8862	Max. cable run for R8863
2*4mm <sup>2</sup>	>0m =<80m	>0m =<80m	>0m =<55m	>0m =<30m
2*6mm <sup>2</sup>	>80m =<120m	>80m =<120m	>55m =<85m	>30m =<45m
2*10mm <sup>2</sup>	>120m =<205m	>120m =<205m	>80m =<145m	>45m =<80m

## DC Transiting Box (ODCPD1)

### External View Configuration Principle Installation Completed




To reduce voltage drop, a DC transiting box (ODCPD1) is required in case that the RRU is far away from the power supply. The DC transiting box is used to transit the DC power transmission cable (diameter: 2 \* 10 mm<sup>2</sup>) to the DC power cable suitable for the RRU (diameter: 2 \* 4 mm<sup>2</sup>).




ODCPD1 needed for R886X if 2\*10mm DC cables used.

### Power Cable Connection Diagram

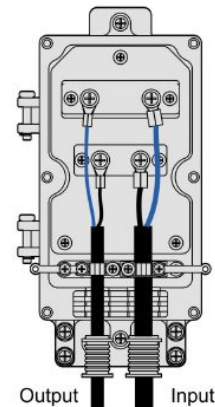



# Product Description – RRU

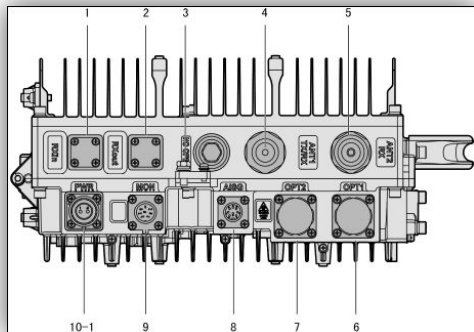


**R8881**

Type	Weight	Dimensions (H*W*D)mm
R8881	18Kg	370x320x170




Type	Weight	Dimensions (H*W*D)mm
R8863	25Kg	440x360x133

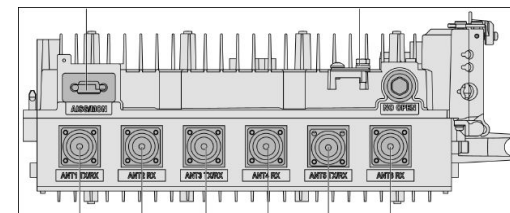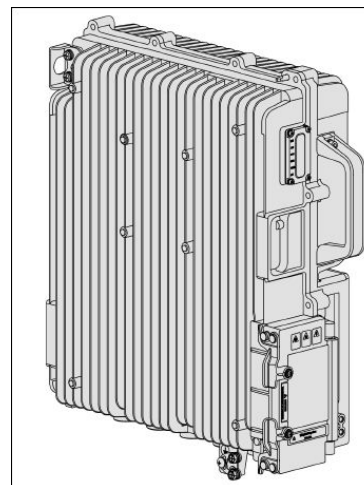

**R8863**

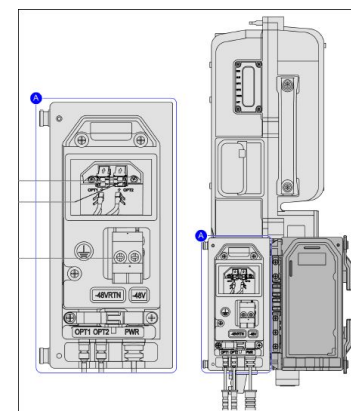

# Product Description – RRU

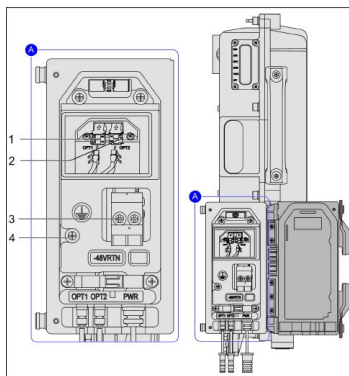
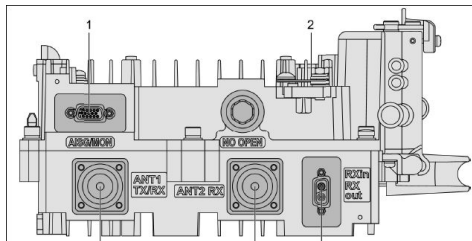
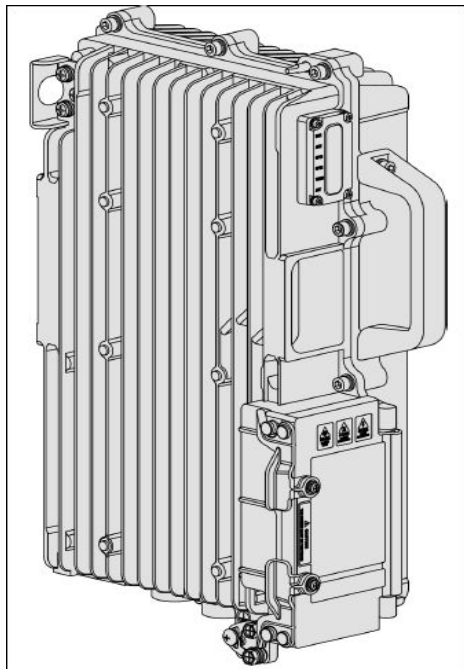


**R8861**

Type	Weight	Dimensions (H*W*D)mm
R8861	18Kg	370x320x170

Type	Weight	Dimensions (H*W*D)mm
R8862A	15Kg	425x220x133

**R8862A**

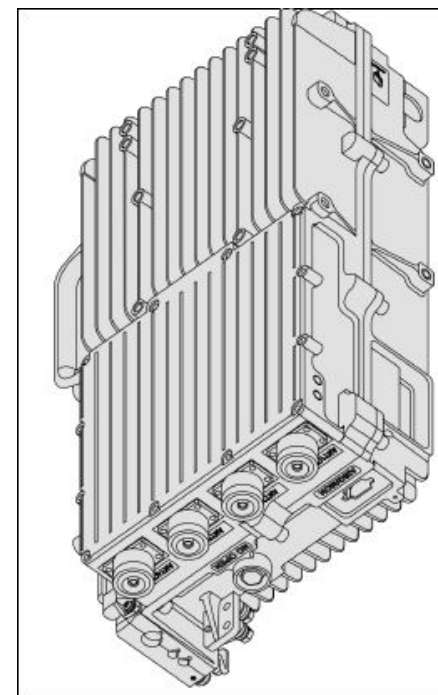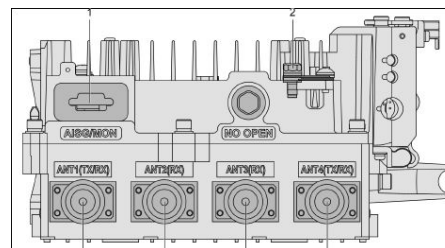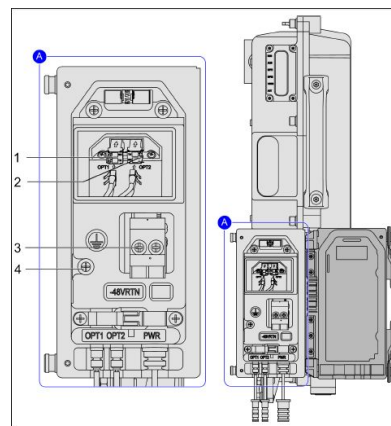



# Product Description – Micro BTS B8908 (2G)



**B8908**


- **BS8908 only used for sites which with following both condition ,**
  - I. IBC site.
  - II. There is no space on site for (-48V DC rack+BBU+RRU) installation.
- **BS8908 only have 2G equipment in this period, that means for sites need to use BS8908,**
  - I. **3G can not be launched on this site.**

Type	Weight	Dimensions (H*W*D)mm	Power consumption	Power input type
B8908	15Kg	420 mm*320 mm*100 mm	165W	220 V AC

# Product Description – RRU RF cable

## RF G900 RRU (R8861 or R8881)

- In case of G900 sector TRX  $\leq 4$ , 1 RRU direct to RRU;
- In case of G900 sector TRX  $> 4$ , 2 RRUs need combination;

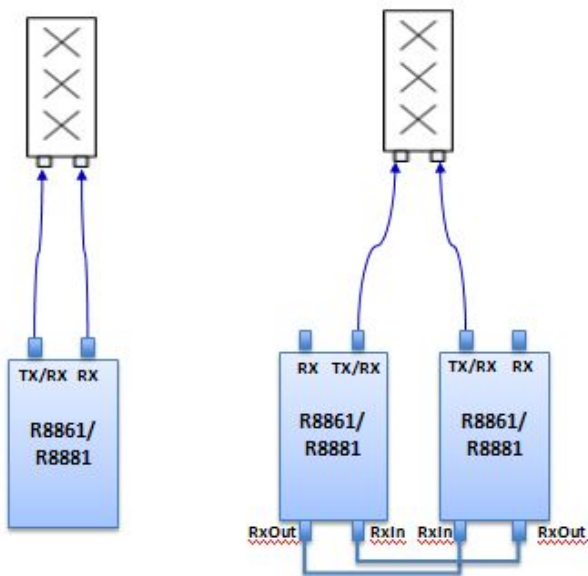


Direct connection

RF Cascade Solution

## RF G900 RRU (R8863)

- See below RRU connection in case of 1 OR 2 R8863 for G900;

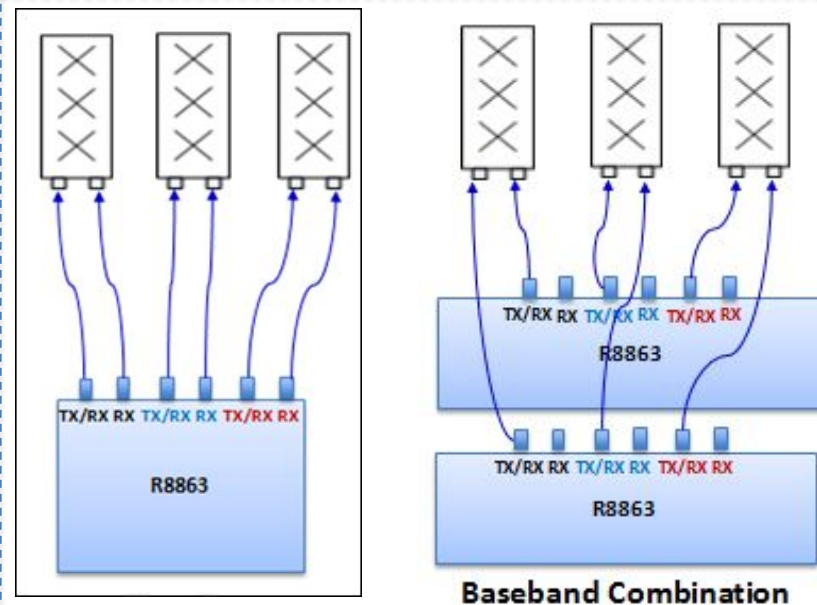


Baseband Combination

# Product Description – RRU RF cable

## RF D1800 RRU (R8862A)


See below RRU connection in case of 1 OR 2 R8862A for 1 sector of D1800;

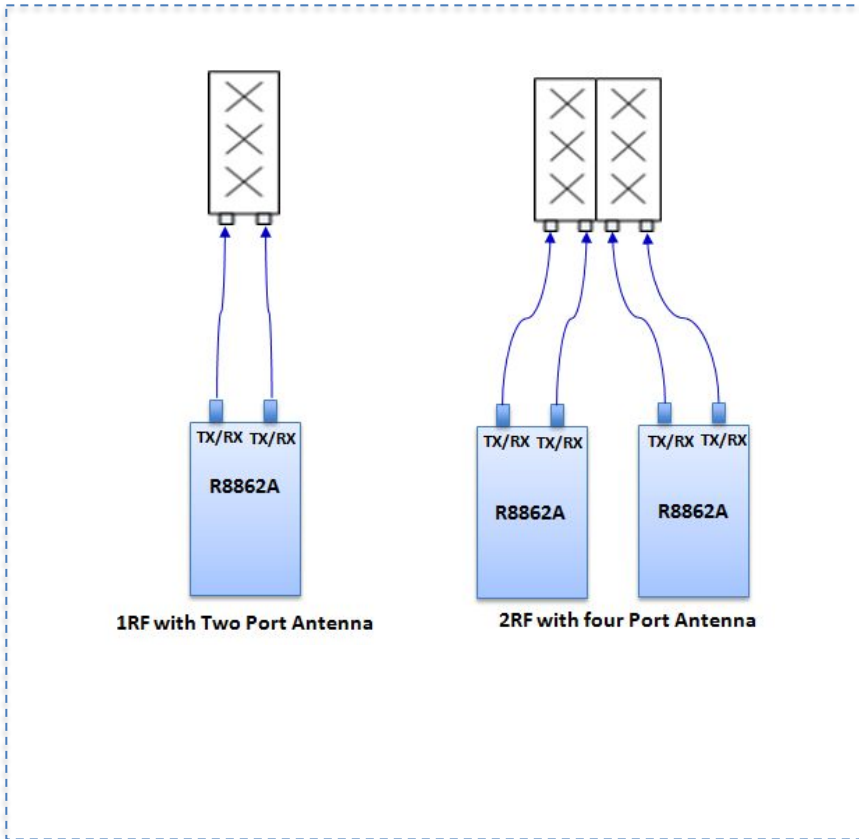

## RF D1800 RRU (R8863)

See below RRU connection in case of 2 OR 3 R8863 for D1800 all sectors;

(If any sector TRX of D1800>8,need 3 R8863,otherwise 2)

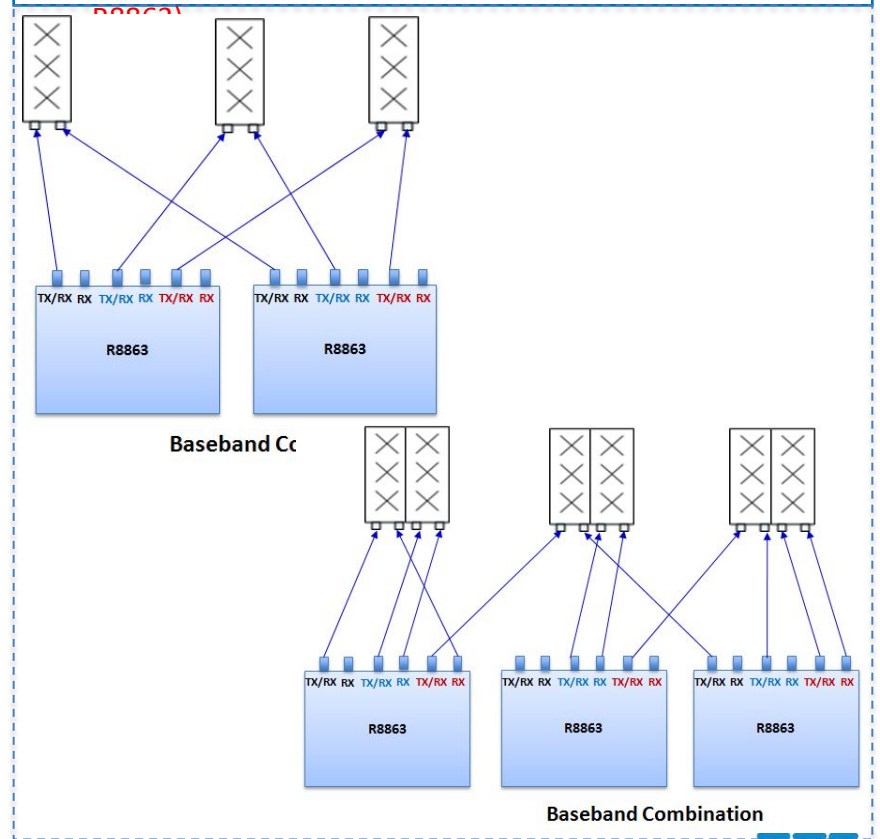




# Product Description – RRU RF cable


## ■ RF U2100 RRU (R8861)

■ See below RRU connection in case of R8861 for U2100;

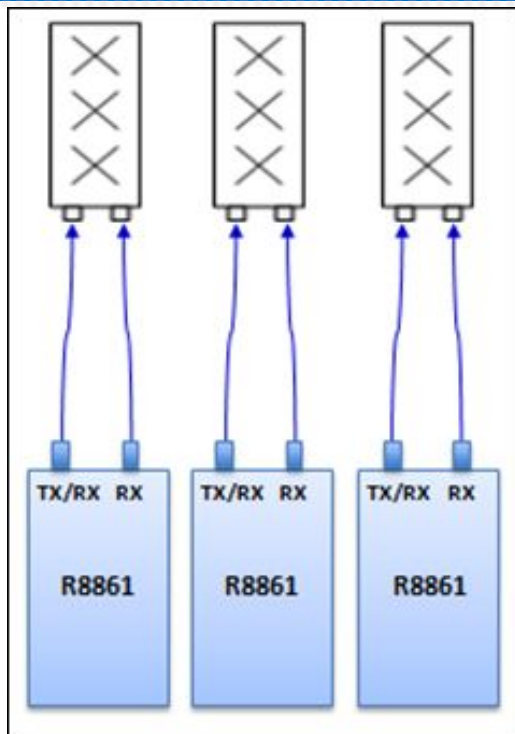

## ■ RF U2100 RRU (R8863)

■ See below RRU connection in case of R8863 for U2100;

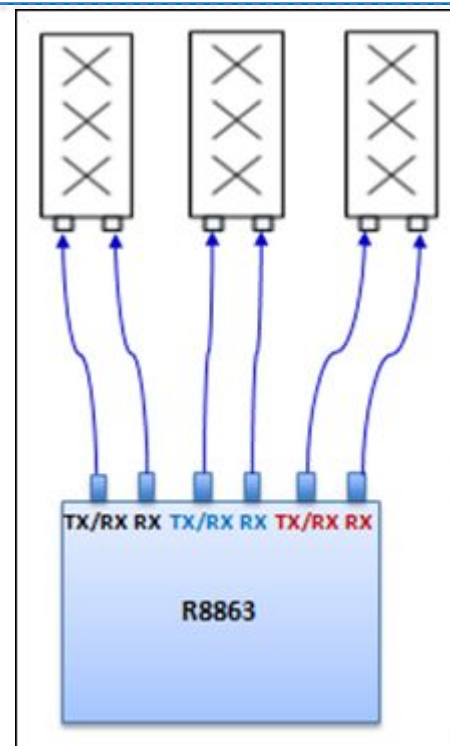


# Product Description – RRU fiber cascading

## ■ RRU fiber cascading

□ There are 6 optic ports on BBU FS5 board.

- I. If RRUs  $\leq 6$ , all RRUs fiber connect to FS5 board optic ports directly.
- II. If RRUs  $> 6$ , 6 RRUs fiber connect to FS5 board optic ports directly, and for the other RRUs which more than 6, need fiber cascading connection.
- III. Only can cascade internally in same system. That means we only can cascade G900 RRU to G900 RRU, D1800 RRU to D1800 RRU, U2100 RRU TO U2100 RRU. we can not cascade G900 RRU to D1800 RRU or U2100 RRU.
- IV. Maximum cascading 3 RRUs. (Not for R8863)

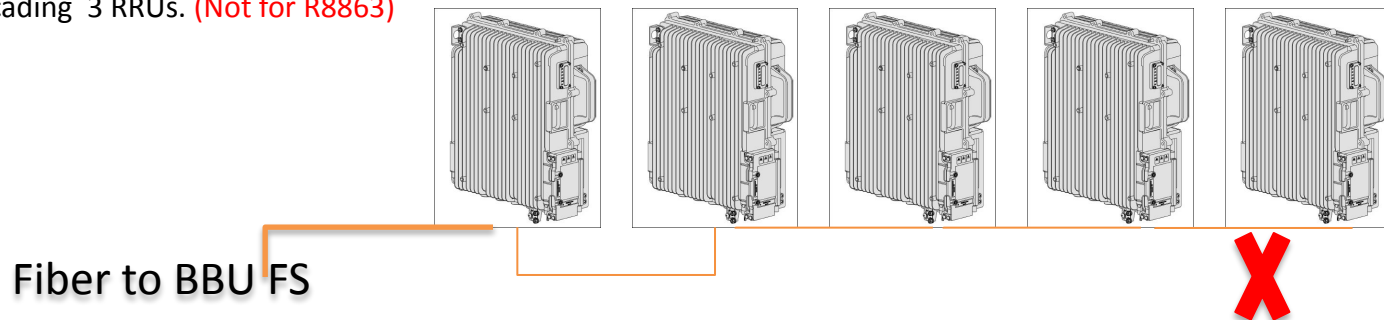

RRU Qty	Qty of BBU-RRU Fiber	Qty of RRU-RRU cascading Fiber	Remark
$A \leq 6$	A	0	
$A > 6$	6	$A - 6$	Must cascading in same system and RRU

## Different types of Fiber for different RRU

The type of BBU-RRU fiber for R888X and R886X is different.


### Fiber for R888X:

There is a protection sleeve for fiber at the RRU side



### Fiber for R886X:


There is no protection sleeve for fiber at the RRU side

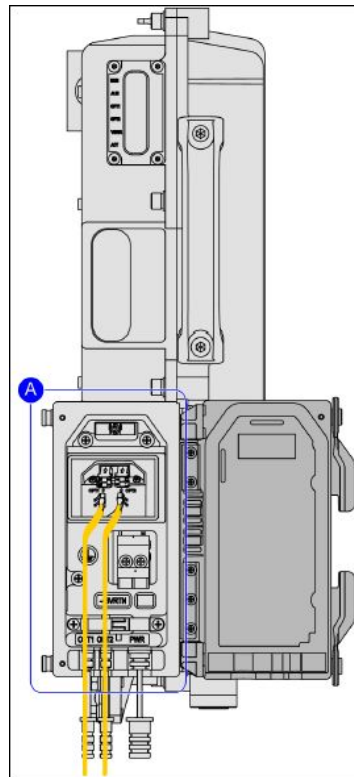

## Site transmission


**Kiyvstar is responsed for upgrading the transmission to IP GE(E) .**

# AISG-U2100 R8861

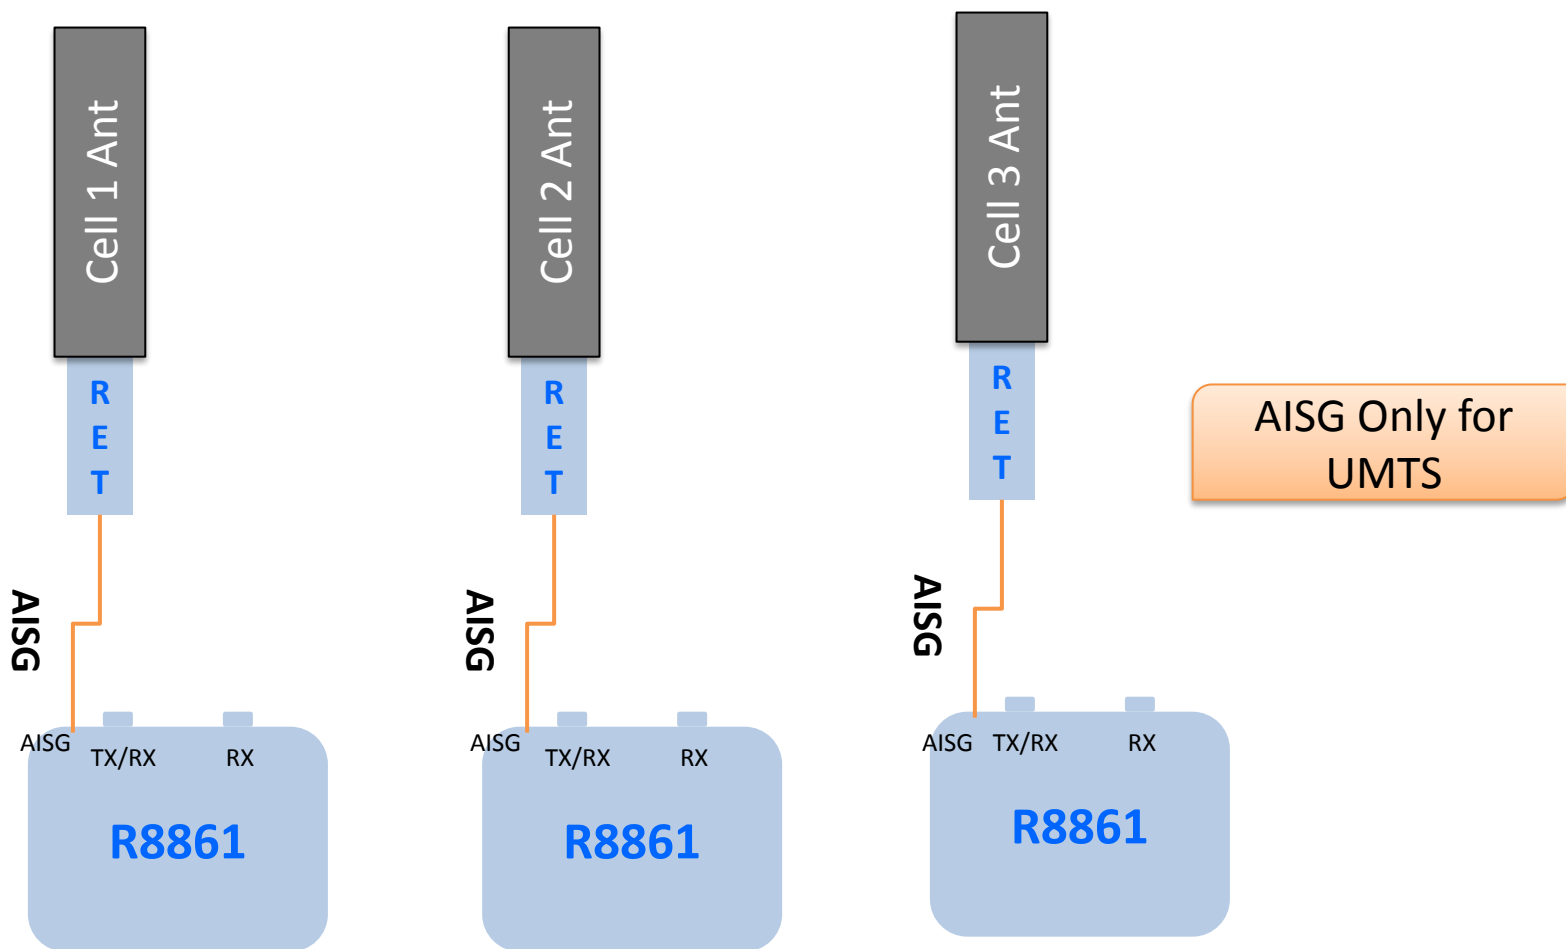

**R8861 installed close to Antenna-AISG cable maximum 20m long**

# AISG-U2100 R8863

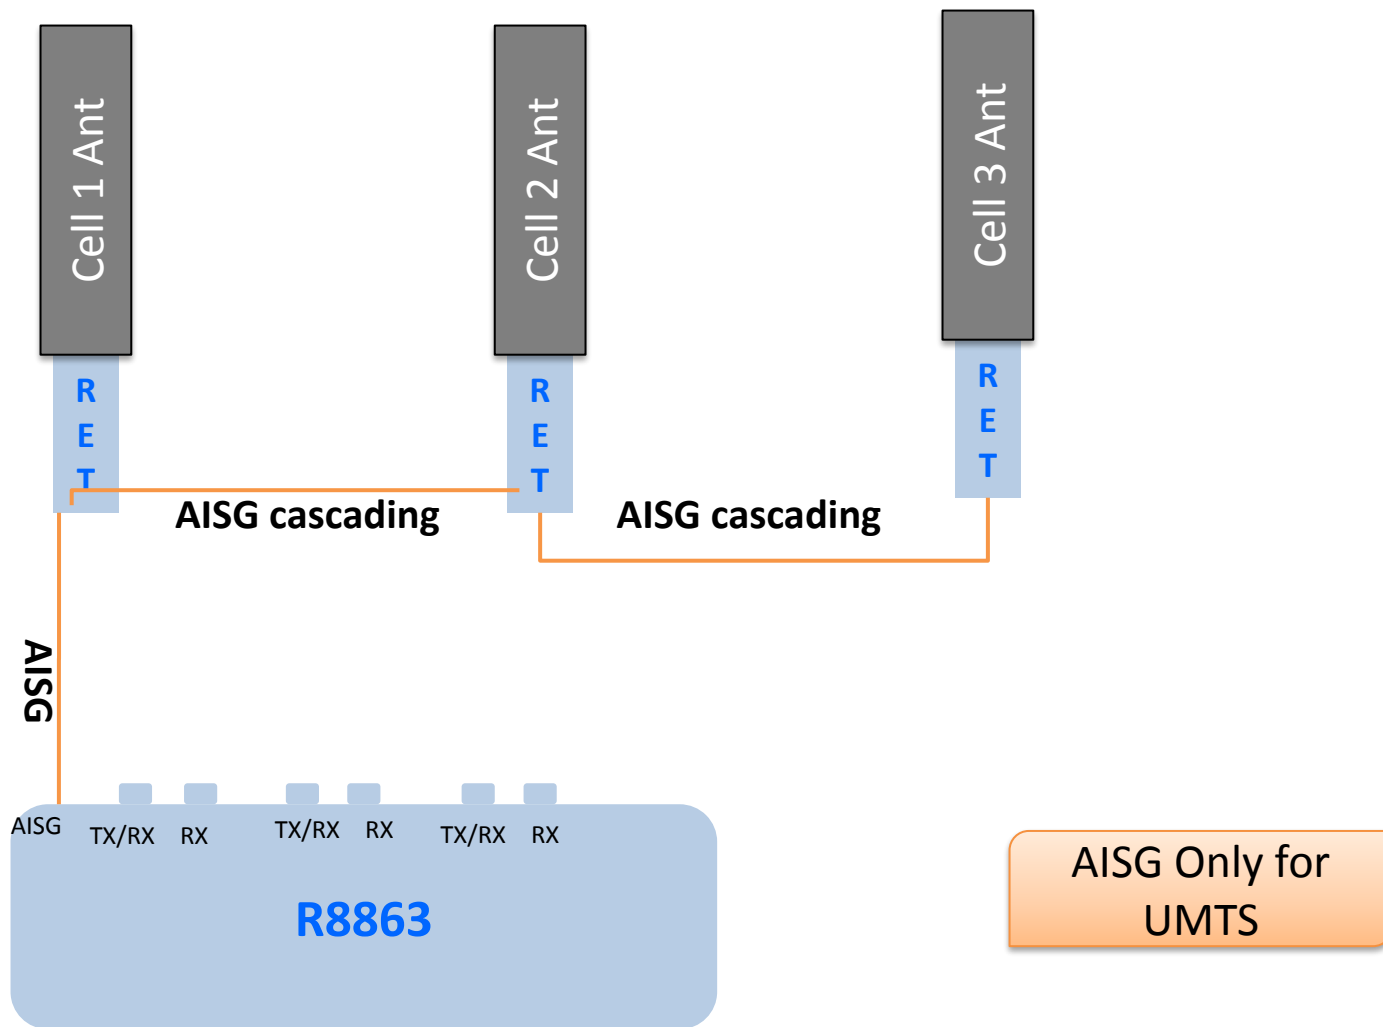

**R8863 installed close to Antenna-AISG cable maximum 20m long**

# Contents



TSSR output Procedure



ZTE Equipment Description



Engineering scenarios



Output Documents



# Site overview

Site Overview						
PO	Site Qty of PO	Region	Site Qty. of Region	2G Swap only	2G Swap+3G Swap	2G Swap+3G Rollout
PO1	132	KIR	45	6	0	39
		POL	52	0	44	8
		SUM	35	0	0	35
PO2	236	KIR	69	0	0	69
		POL	19	0	0	19
		SUM	59	1	0	58
		CHG	26	0	0	26
		DNE	24	0	0	24
		ZAP	39	6	0	33
<b>Total</b>	<b>368</b>	<b>-</b>	<b>368</b>	<b>13</b>	<b>44</b>	<b>311</b>



# Site Scenarios-Site Equipment Principle

Major Equipment			Before	After	Remark	
BTS	Macro/BBU		Macro	New 19" BBU Rack		
			NSN BBU Rack	Reuse NSN BBU Rack		
	RRU	Macro/Distributed		R8863/R8861(R8881)	G900	Priority to use R8863.May change to R8861/62/81 if jumpers length>5m
				R8863/R8862	D1800	
		R8863/R8861	U2100			
DC System	Rectifier Module	+24V	-	ZXDU68 B301 in ZXDUPA-FR01	2 Type:1600mm 2000mm	
	Battery		-	TBC-ZTE 150Ah*2 group		
	Rectifier Module	-48V	-	Reuse		
	Battery		-	Reuse		
Antenna			-	Reuse	2G Swap + 3G Swap	
			Spare ports for 2100M available	Reuse	2G Swap + 3G Creation	
			Spare ports for 2100M not available	New 2100M 2 Ports Antenna		
			Spare ports for 2100M not available &Not possible to install new antenna	Swap existing Antenna with 4 or 6 Ports Antenna		
			-	Reuse	2G Swap	
			-	Reuse	3G Swap	


# BBU and DCPD installation

## Scenario 1-In New/Existing 19" Rack

- BBU&DCPD to be installed on **existing 19'Rack**(Only existing BTS 19' rack. **Transmission 19' rack is not allowed to install new BBU&DCPD**)
- BBU&DCPD to be installed on **new 19'Rack**(No existing BTS 19" rack or No enough space in existing 19' rack)

### Space requirement:

- 5U space for (BBU+1 DCPD)
- 7U space for (BBU+2 DCPD)

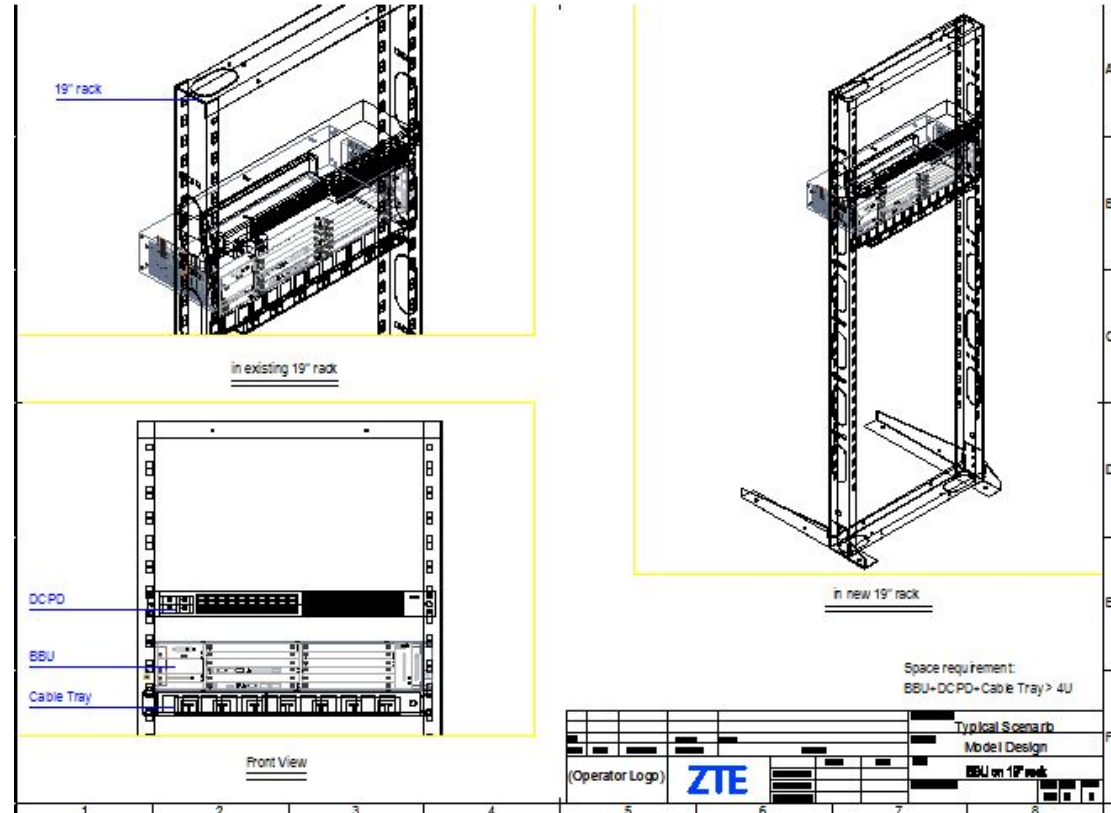

**BBU to be installed on existing BTS 19' rack  
or on new 19' rack**

# BBU and DCPD installation

## Scenario 2-In New ZTE DC Rack

- To be installed in New ZTE DC rack(Only for IBC sites)


- The solution only used in very special and difficulty situation, this is not normal solution.

- In case of can not install new 19' rack, just like some IBC sites due to space limited.

- Space requirement:




- 5U space for (BBU+1 DCPD)

- 6U space for (BBU+2 DCPD)

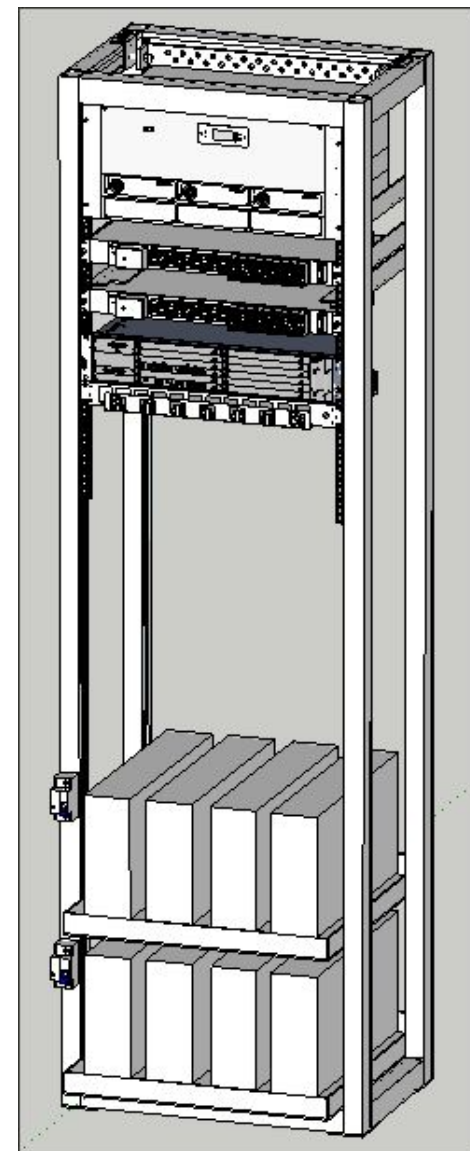

# RRU installation



Components-"1-on-1 pole"

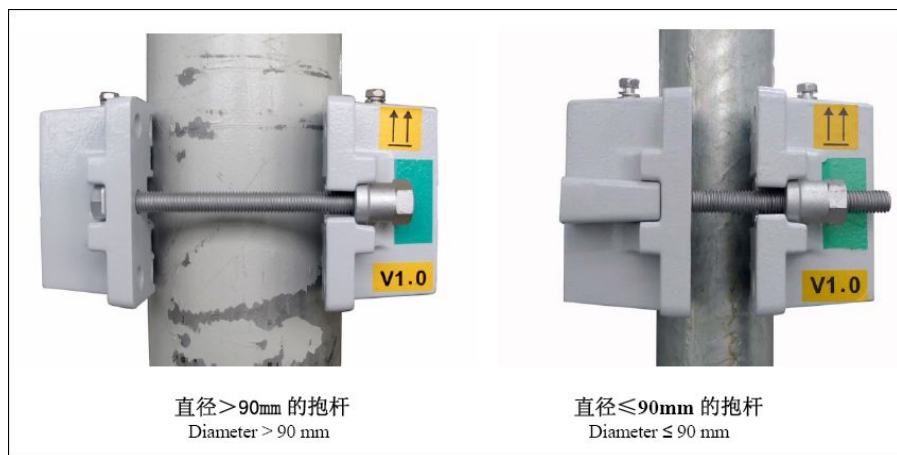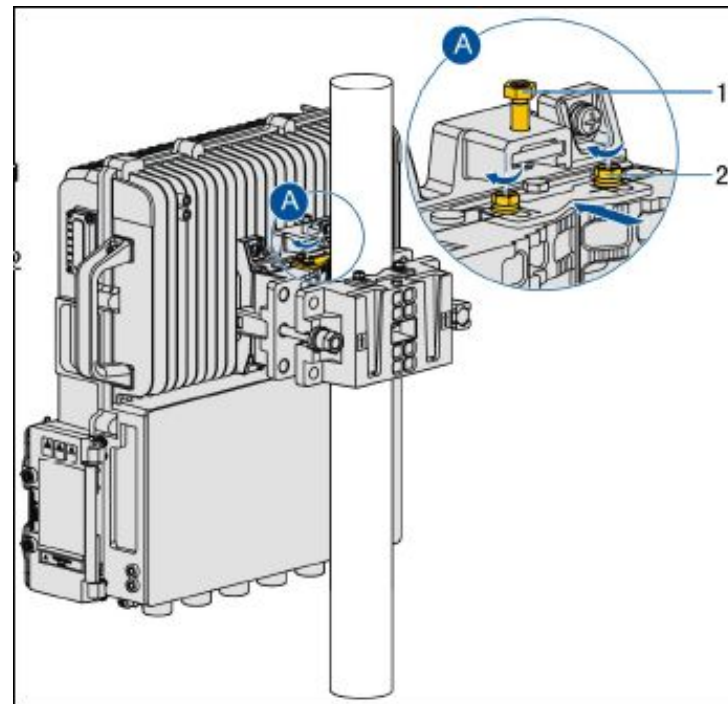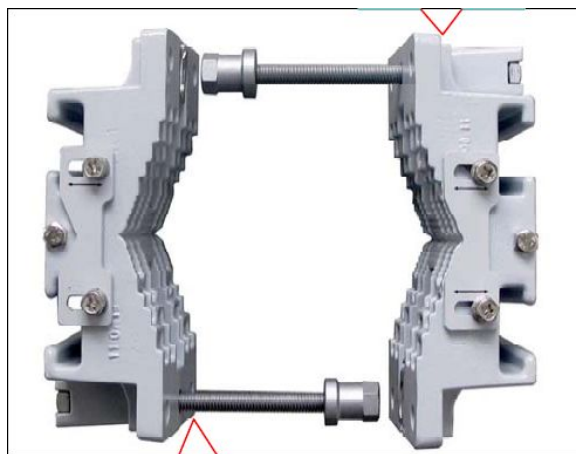

1 RRU fixing on pole kit-1 RRU need 1 set bracket  
(Pole diameter requirement: 40mm to 120mm)

# RRU installation


## Components-"2-on-1 pole"

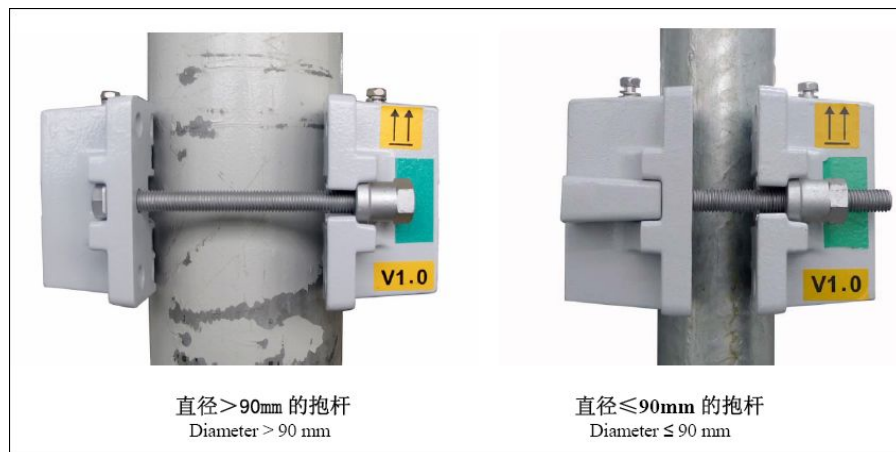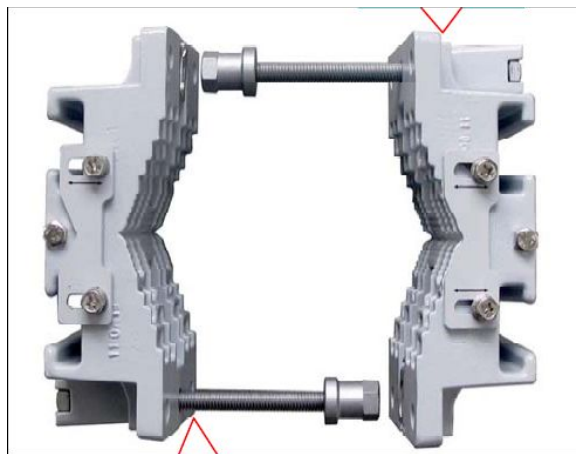

2 RRU combined fixing on 1 pole kit - 2 RRU need 1 set bracket  
(Pole diameter requirement: 60mm to 120mm)

# RRU installation

Components-"3-on-1 pole"

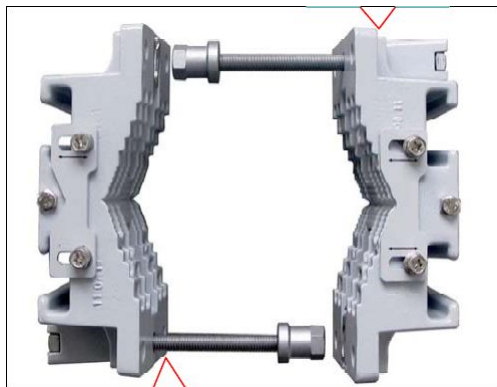


3 RRU combined fixing on 1 pole kit - 3 RRU need 1 set bracket  
**(Pole diameter requirement: 60mm to 120mm)**



# RRU installation

Components-"4-on-1 pole"

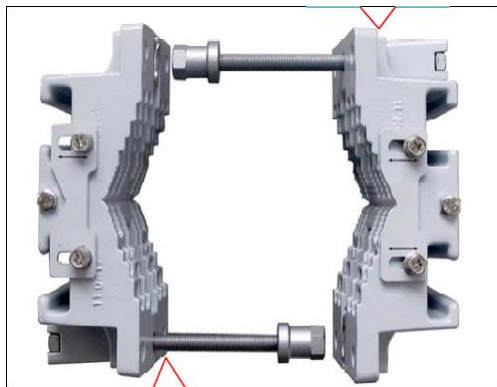

4 RRU combined fixing on 1 pole kit - 4 RRU need 1 set bracket  
**(Pole diameter requirement: 60mm to 120mm)**

# RRU installation

## General

### ■ Different RRU Installation solution for different RRUs:

RRU	1-on-1 pole	2-on-1 pole	3-on-1 pole	4-on-1 pole
R8863	Ok	Ok	No	No
R8861	Ok	Ok	Ok	Ok
R8862	Ok	Ok	Ok	Ok
R8881	Ok	Ok	Ok	Ok

### ■ 3-on-1 pole and 4-on-1 pole components are not available for P01 and P02.

### ■ RRU installation components can suit for below conditions (No need additional mount) :

- I. Pole diameter 60 - 120 mm. If the diameter  $\leq 90$ mm, use the pad on the bolt; otherwise, remove the pad.
- II. The angle steel should range from 60 mm to 100 mm;
- III. The channel steel should range from 63 mm to 100 mm.



# RRU installation



## Scenario 1-1 Outdoor-At the backside of antenna

- To be installed at the backside of antenna on the antenna pole
- Space behind the antenna is more than 400mm



## Scenario 1-2 Outdoor-At the backside of antenna

# RRU installation components-Wall mount

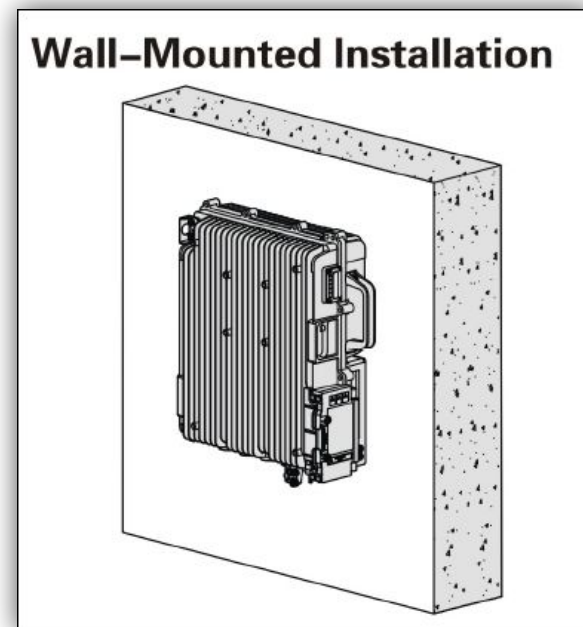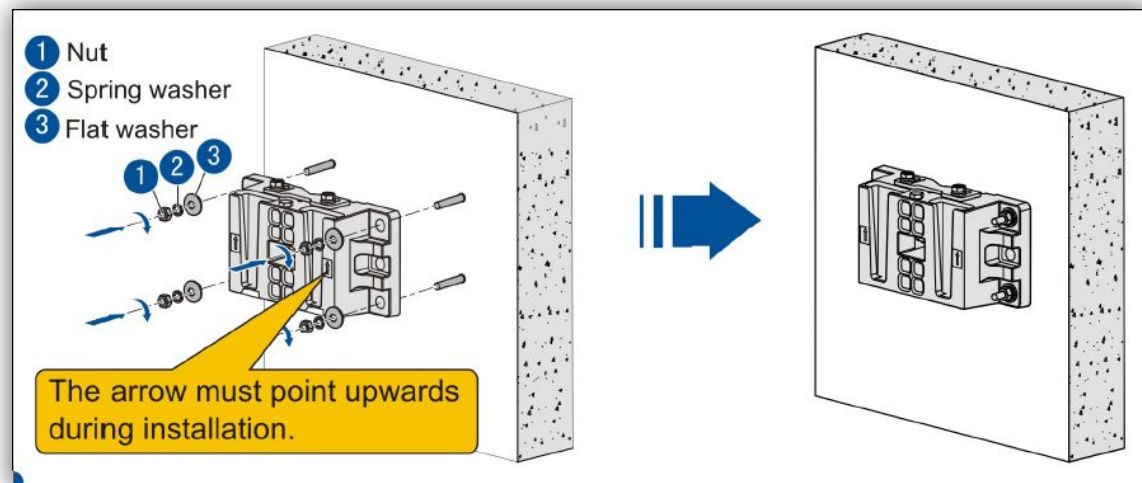


Wall mount fixing bracket kit---One RRU need 1 set bracket


# RRU installation components-RRU gantry installation



Indoor RRU gantry

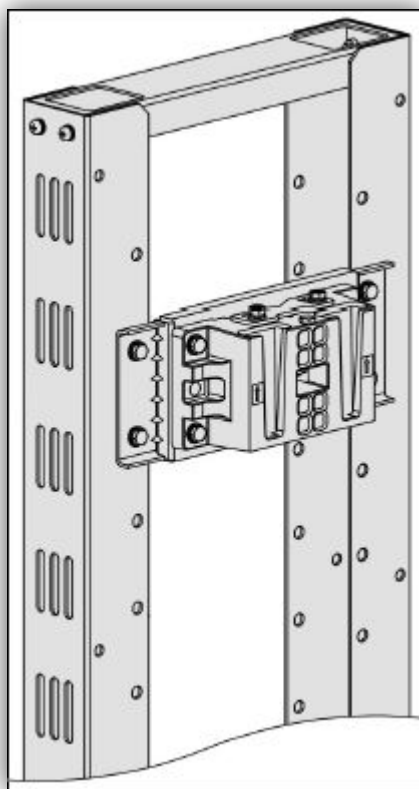

**This is the second choice  
when the RRUs can not be  
installed on wall**

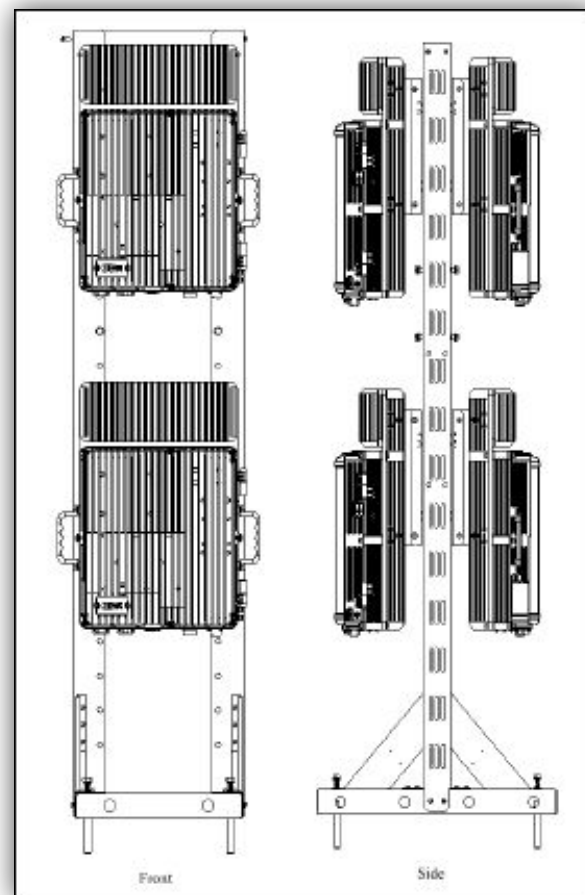

RRU installed on the Indoor RRU gantry

# Tower Scenarios-Summary

Scenario No.	Scenario Description	Scenario Ratio	RRU type
1	GF Guyed master	6%	R8863
2	GF SST	10%	R8863
3	IBC (No Tower)	2%	R8861 OR R8881 OR R8862A OR R8863
4	Monopole	39%	R8863
5	Monopole(Traditional)	2%	R8863
6	RT Guyed master	16%	R8863
7	RT Pole(1 Single pole for all sector)	13%	R8863
8	RT Pole(Separate pole for each sector)	8%	R8861 OR R8881 OR R8862A

## ■ In case of Wrong RRU type configured in ZTE B0Q,


□ Plz note and inform ZTE by email with site ID and tower type;

□ **Modify all system RRUs during TSSR output, not only 3G;**


1. **For example, site survey shows rooftop guyed master on site, but in ZTE B0Q configure is not R8863, just send email to ZTE and get confirmation, change all RRU to R8863.**

# Tower Scenarios


## GF Guyed master

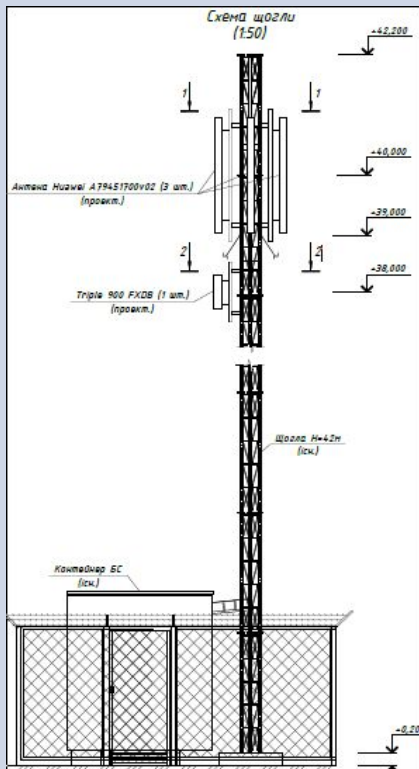

## GF SST

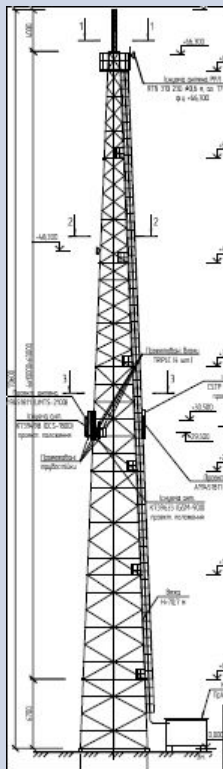


## Monopole

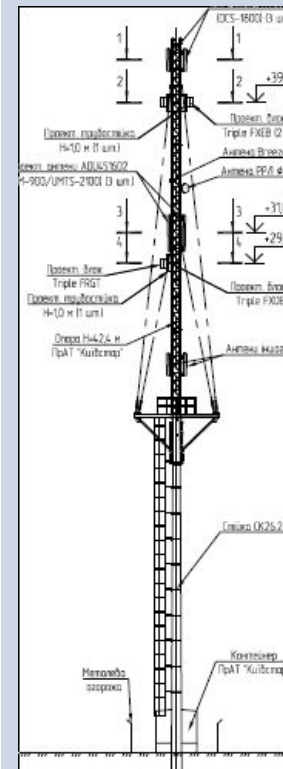


# Tower Scenarios


Monopole(Traditional)

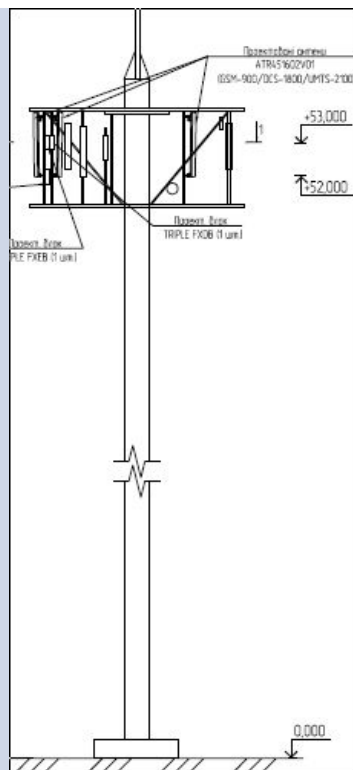

RT Guyed master

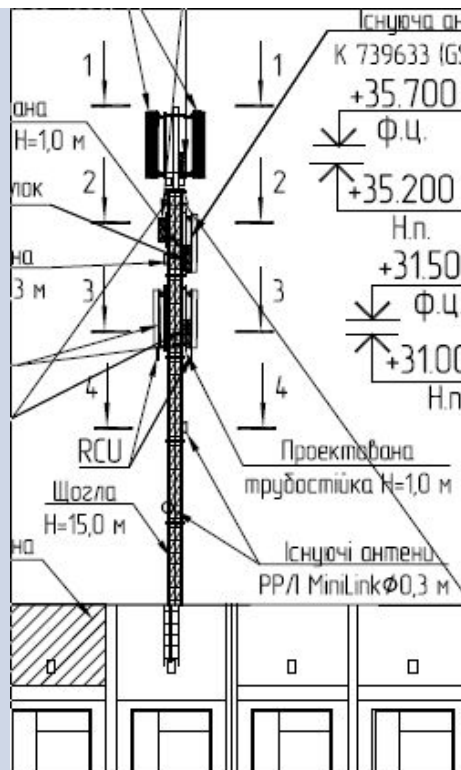


RT Pole(1 Single pole for all sector)

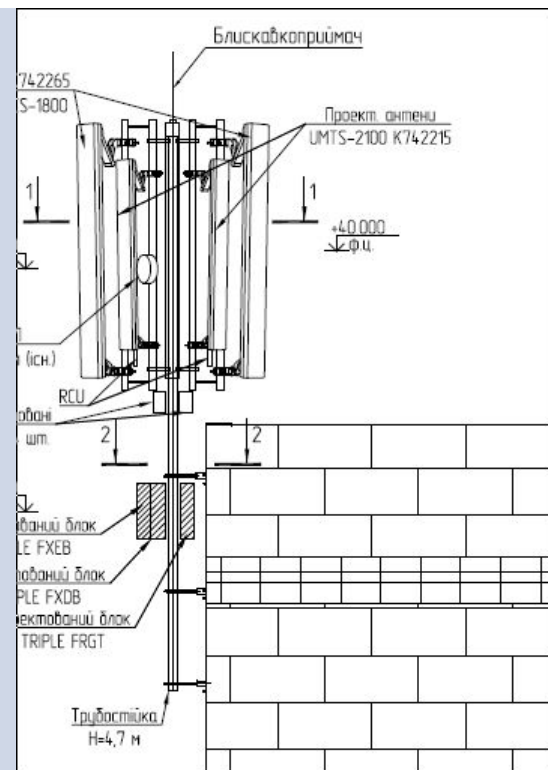

# Tower Scenarios

## RT Pole (Separate pole for each sector)

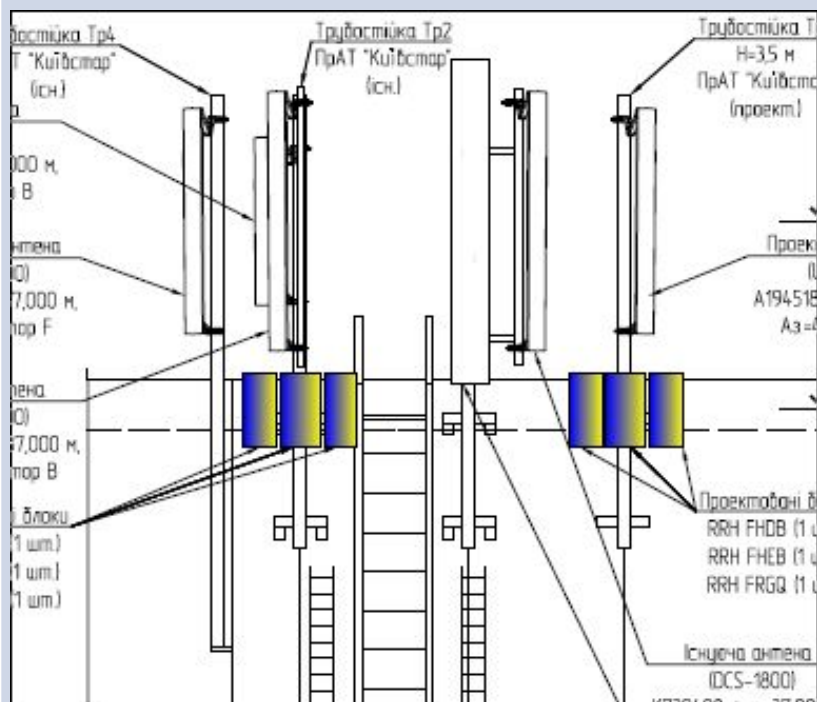

## Basic guideline for RRU installation

### For masters:

- I. U2100 R8863 to be installed on tower leg or antenna pole close to 3G antenna.
- II. For guyed master and monopole, the R8863 for 900M and 1800M to be installed on the RRU pole or tower leg.
- III. For SST, the RRUs to be installed on antenna pole or RRU pole or tower leg.

### RT pole


- I. RRUs to be installed on antenna pole or new RRU "F" pole according to site situation.



# "H" support structure-For RRU installation

■ Can be used in following scenario

- Guyed master
- Monopole

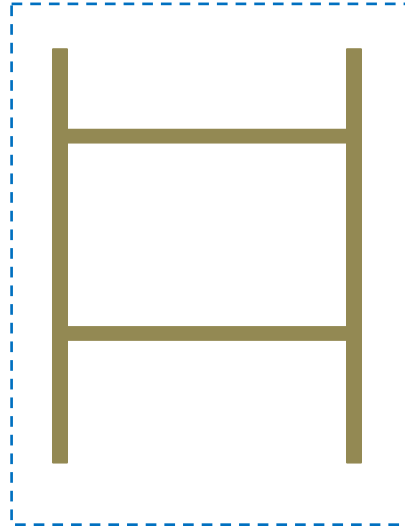





# "F" support structure-For RRU installation

■ Can be used in following scenario


□ Rooftop pole

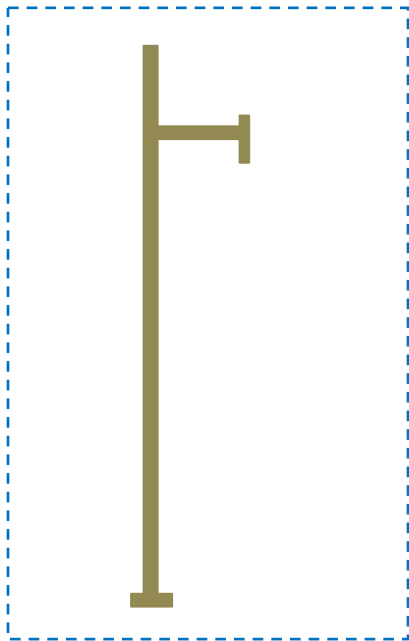


# Suggested RRU installation-Self support tower

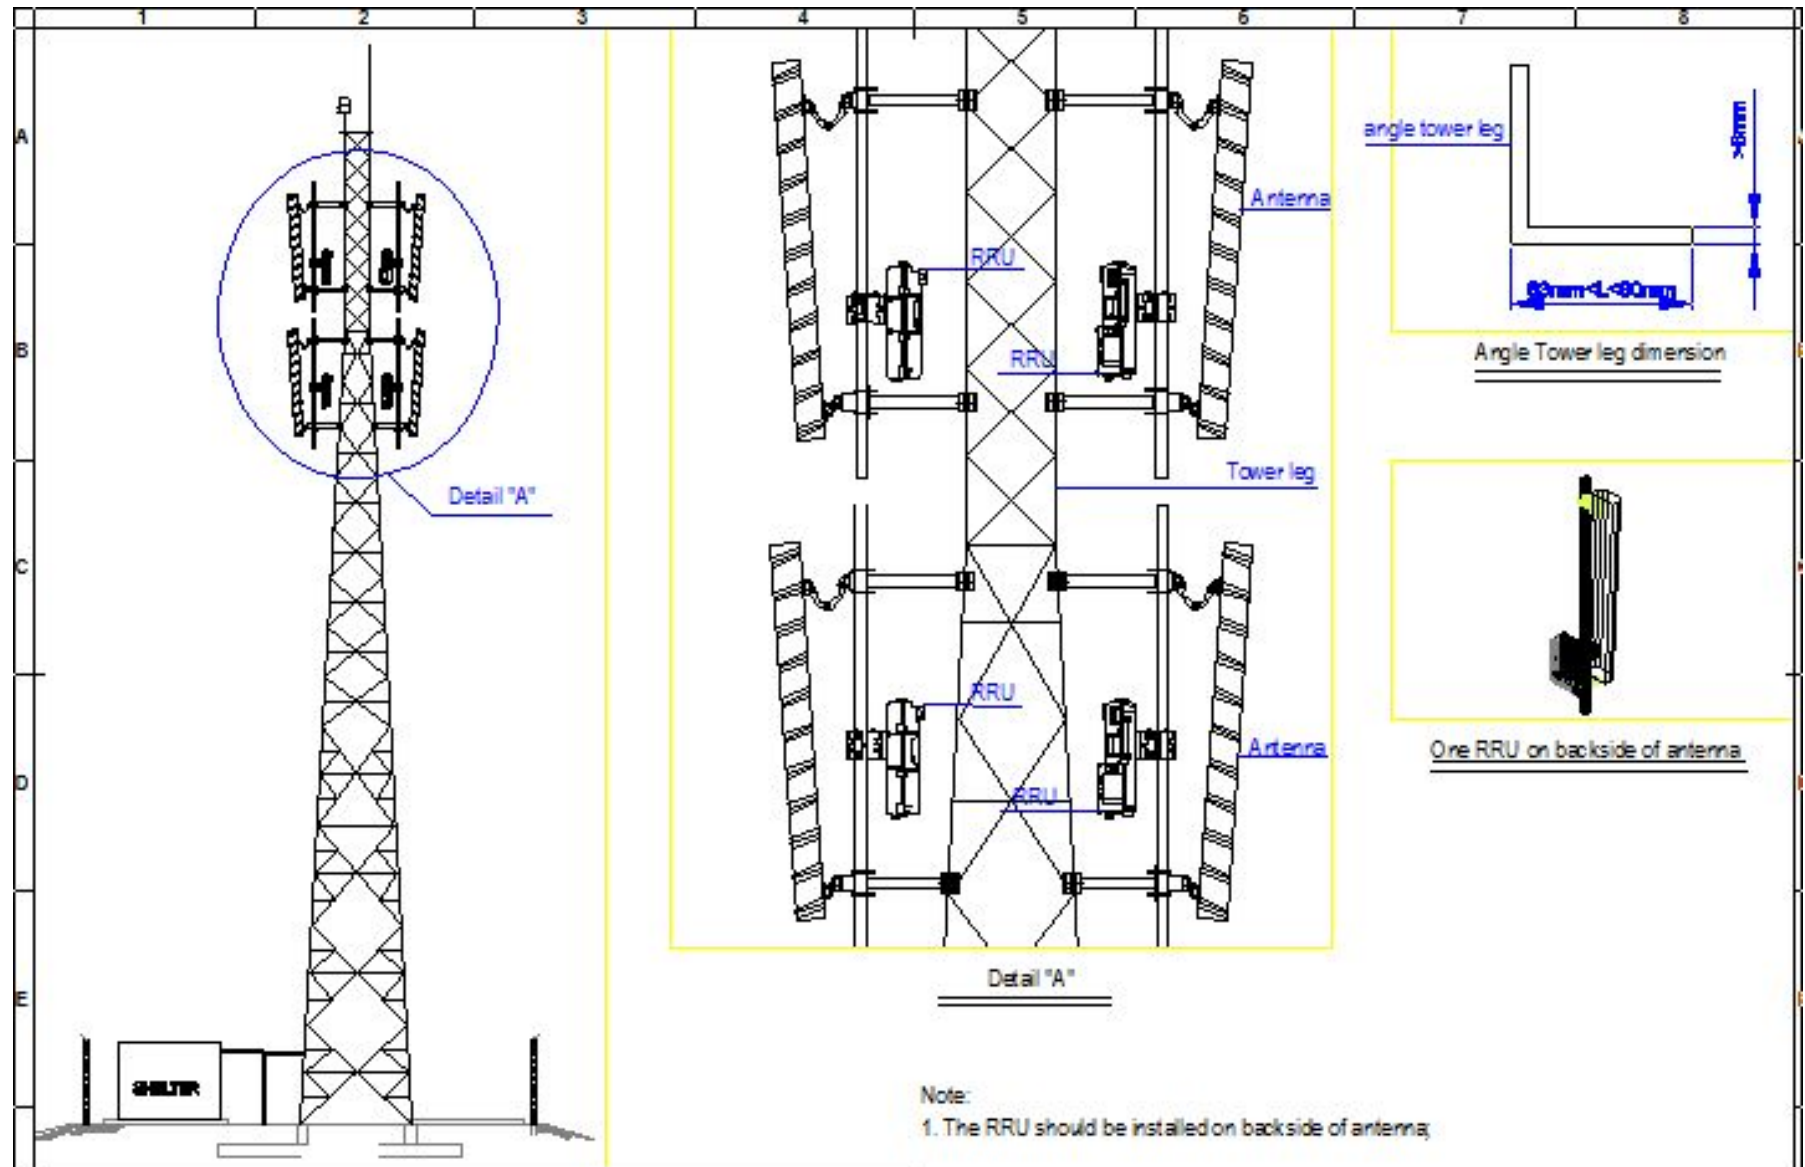

# Suggested RRU installation-Guyed master

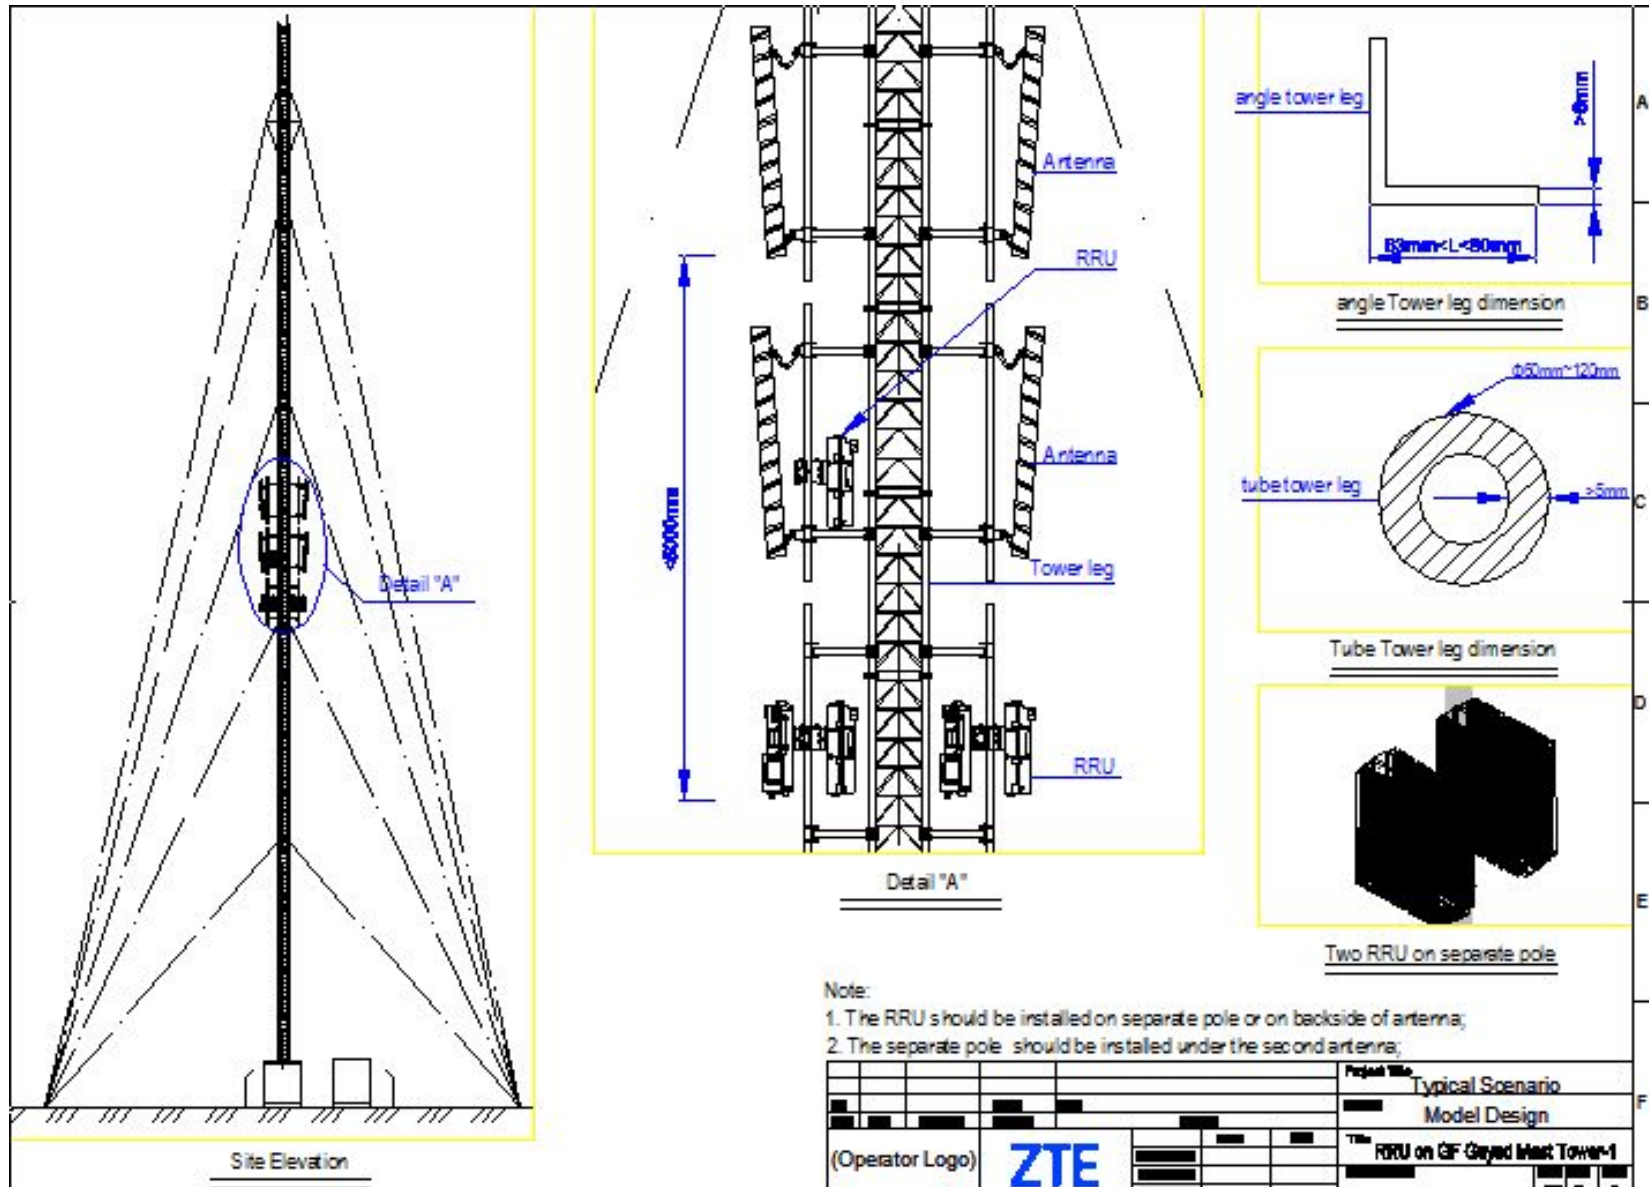


# Suggested RRU installation-Monopole

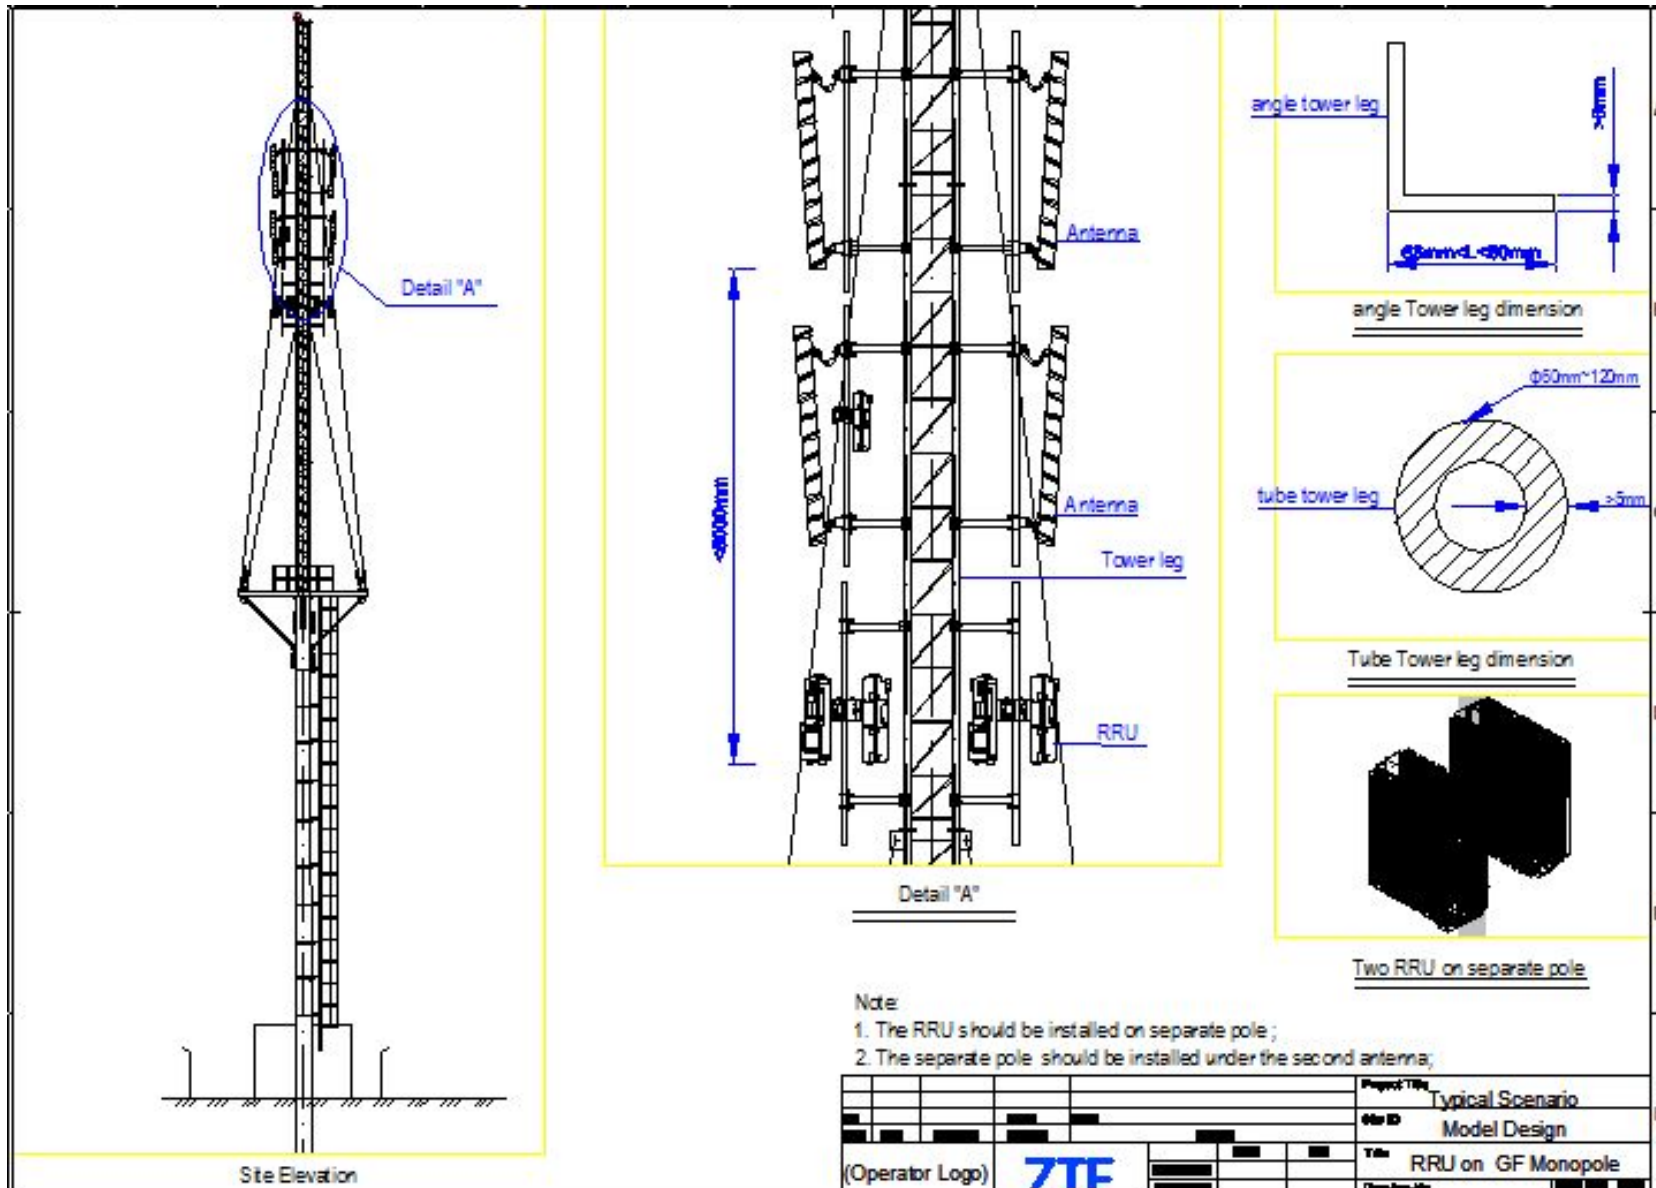





# Suggested RRU installation- RT Pole(1 Single pole for all sector)

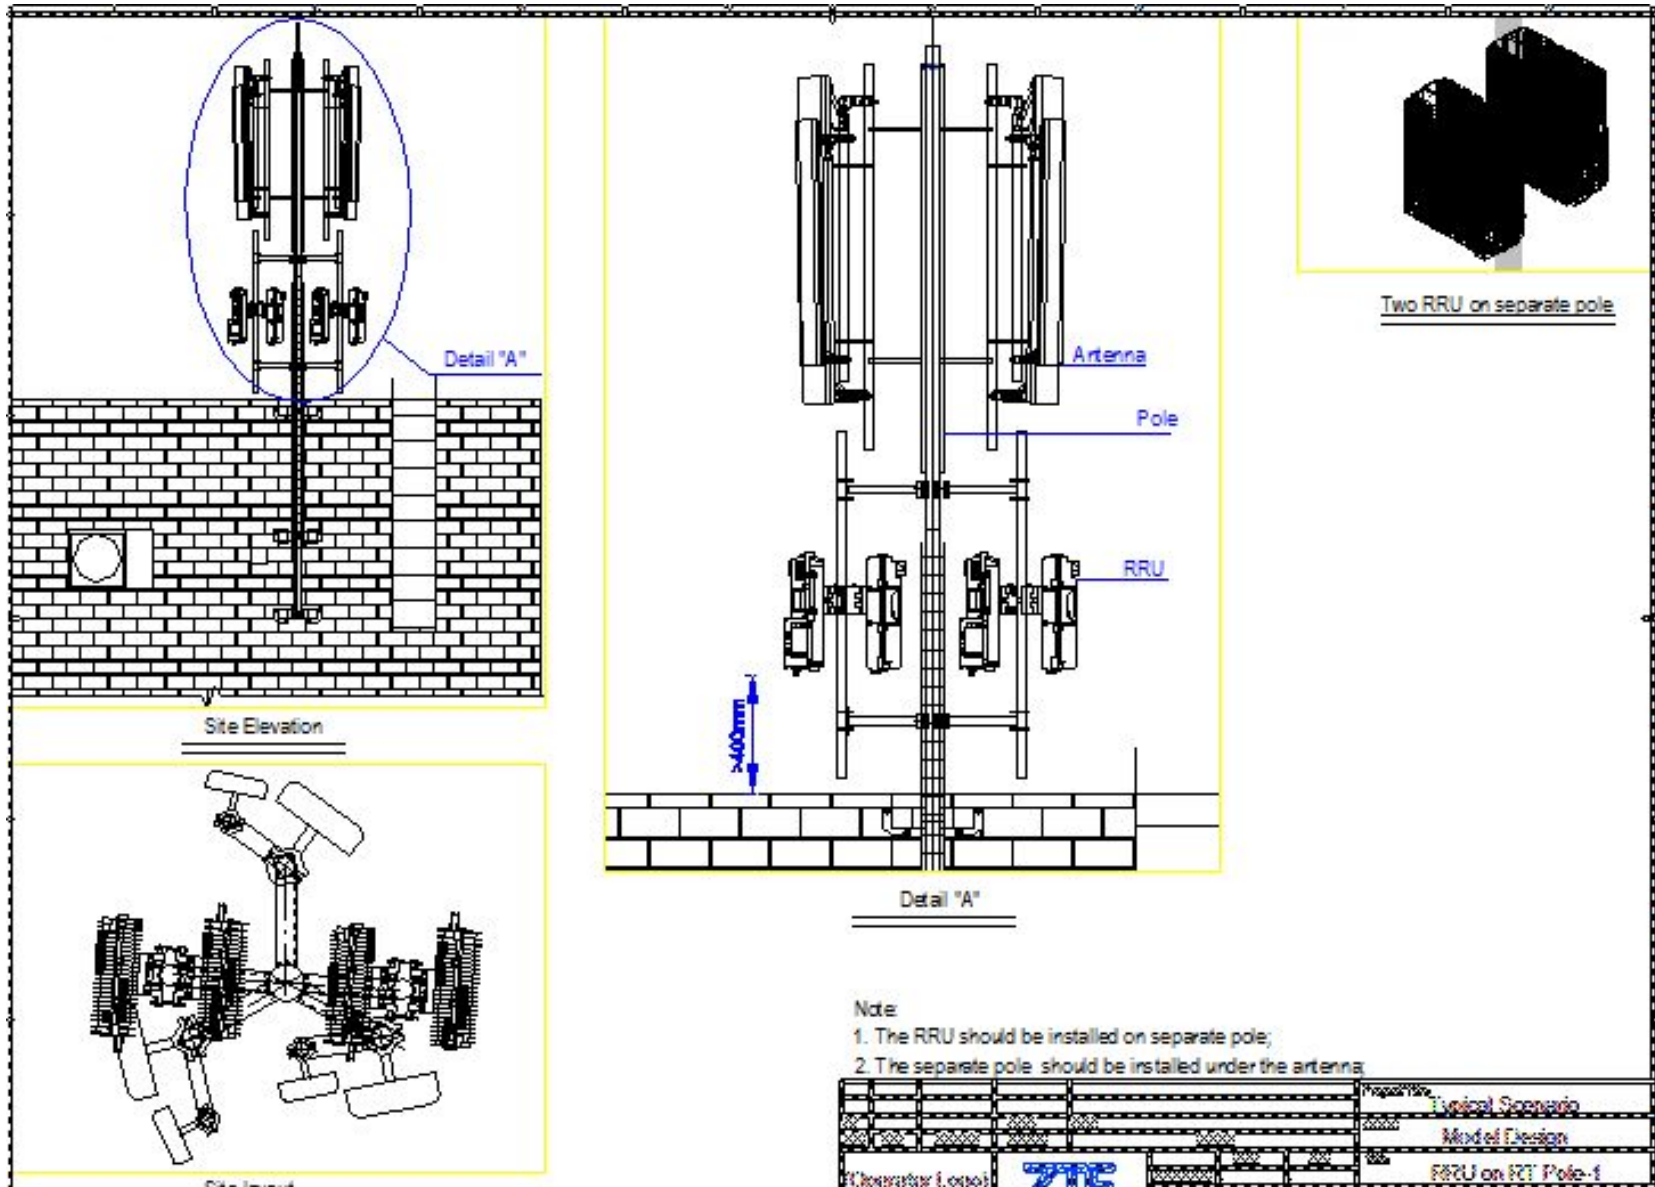

# Suggested RRU installation-RT Pole(Separate pole for each sector)

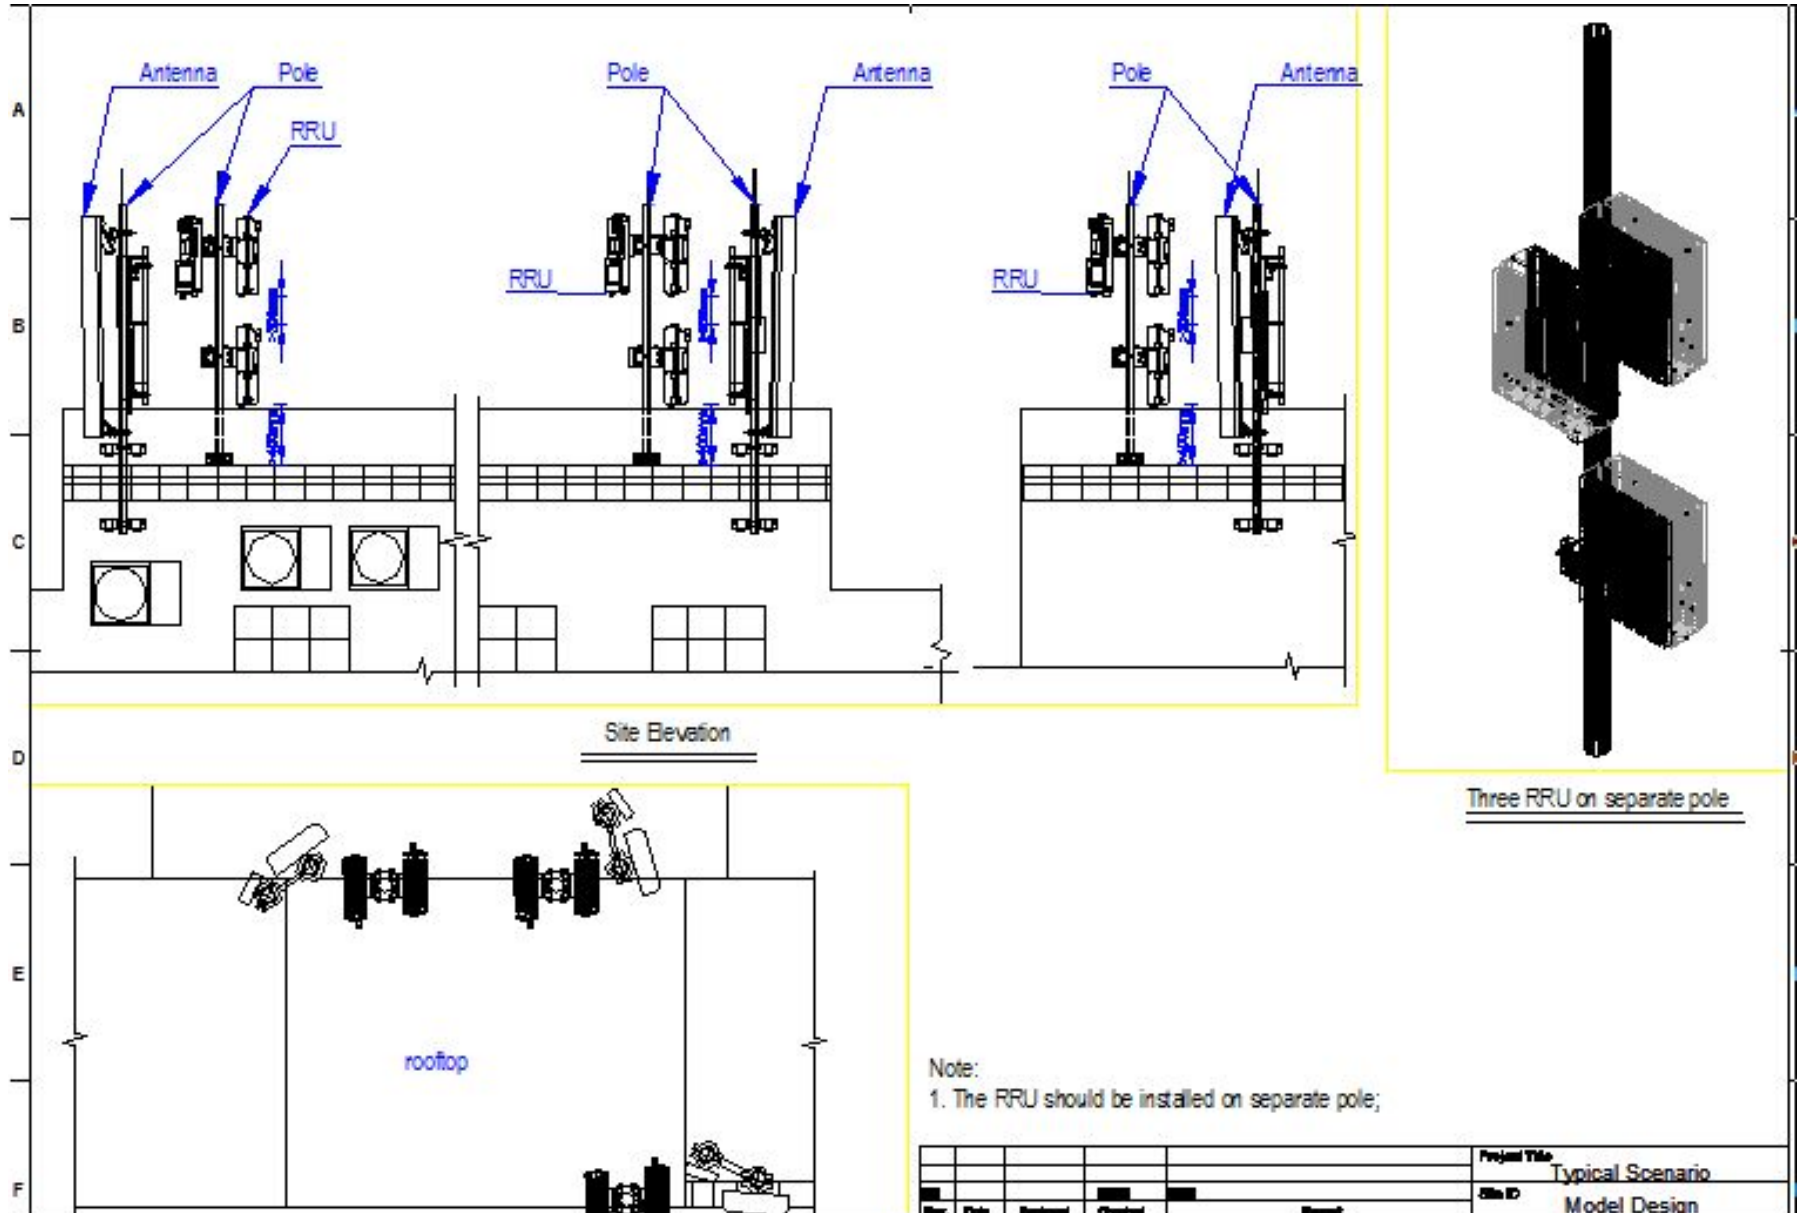



# Suggested RRU installation-RT Pole(Separate pole for each sector)

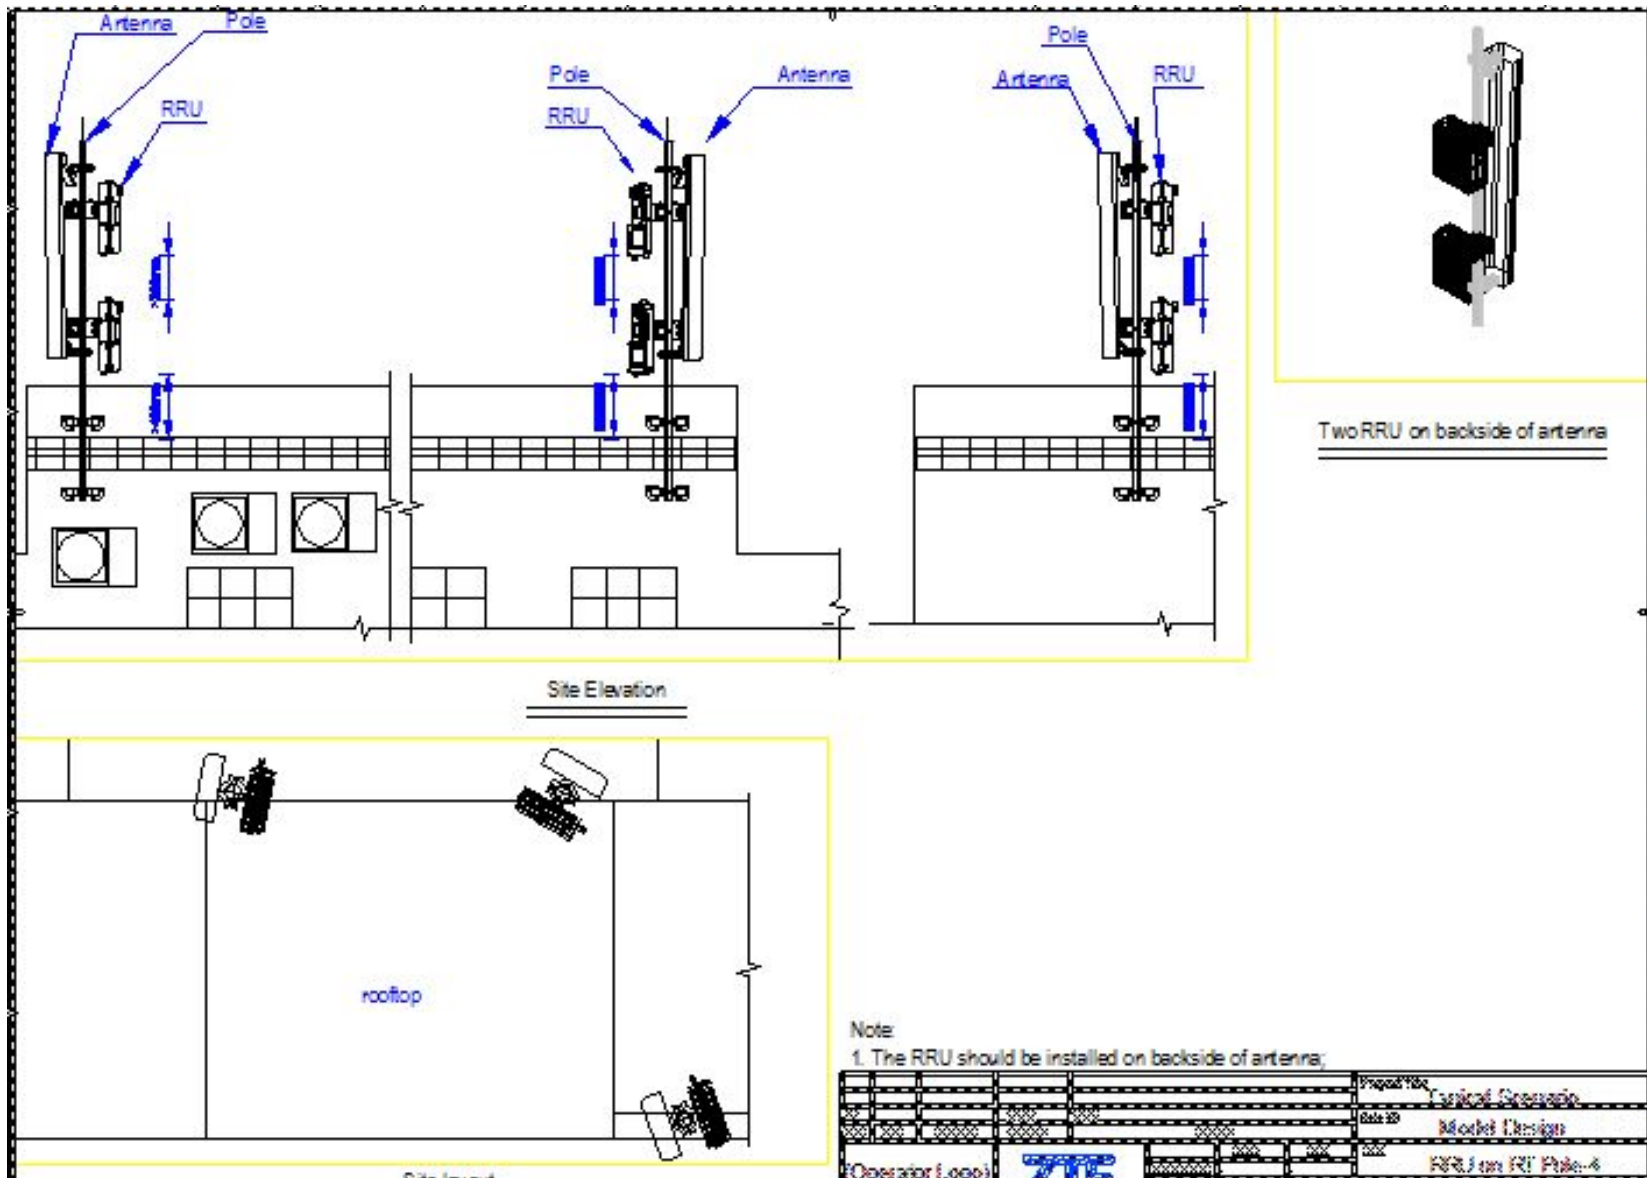



# IBC sites solution scenario 1

■ Enough space for DC rack and RRU

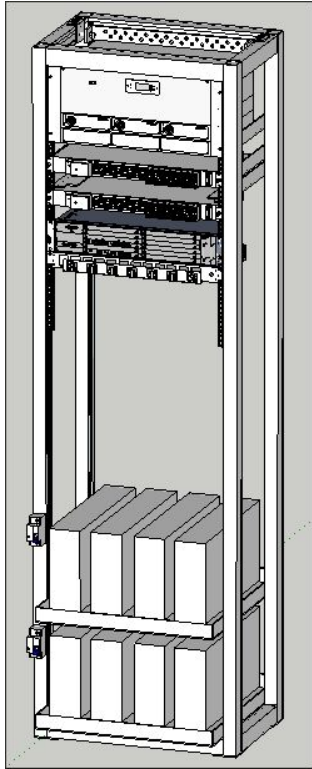


Example



-48V DC rack + BBU&DCPD+RRU  
2G+3G can be performed on site



# IBC sites solution scenario 2 (BS8908 Only can launch 2G)

■ No space for DC rack and RRU

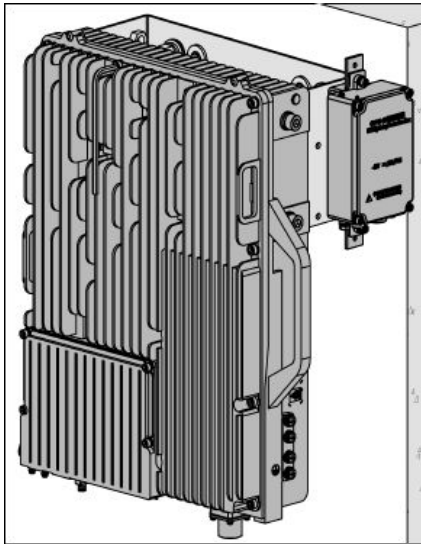

BS8908---AC 220V  
Only 2G on be launched on site

Example: Equipments only can be installed inside ceiling

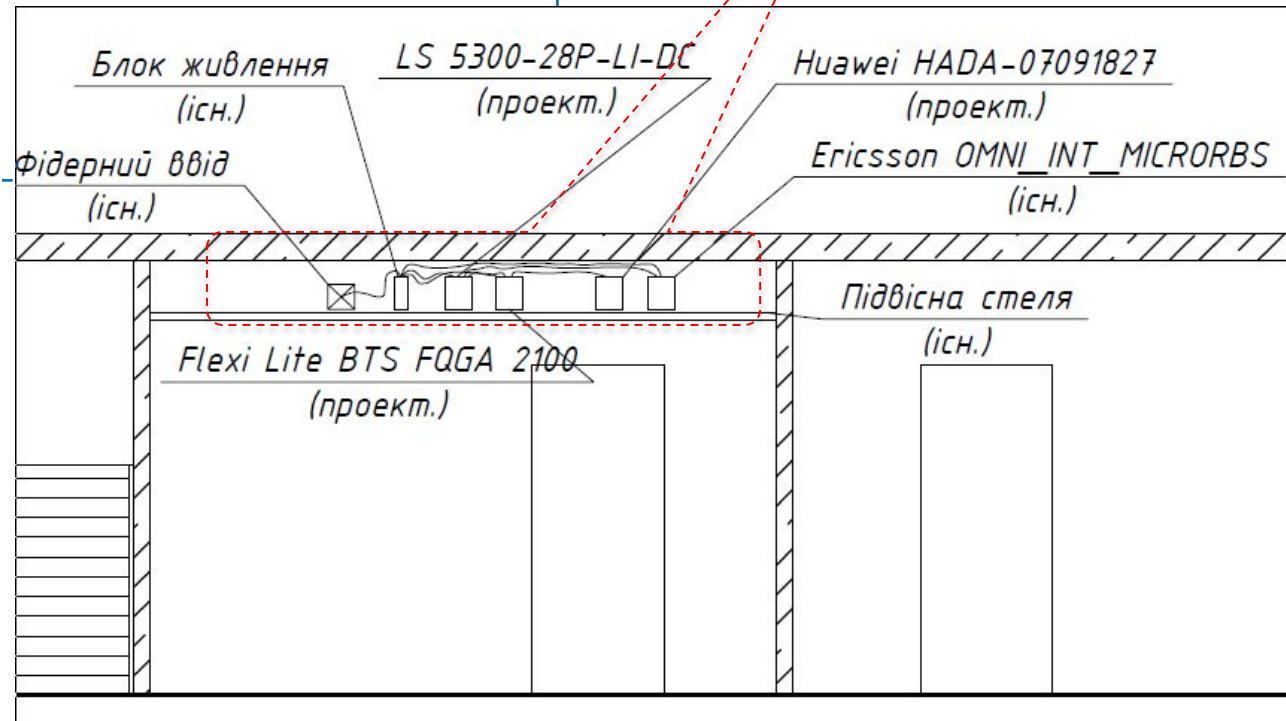

# Antenna Scenarios

## ■ Basic guideline for Antennas

□ We should check all sector ports requirement for all system in input form.

- I. Plz pay special attention to D1800 ports requirement.
- II. 2G antenna should reuse existing antenna if possible.

## □ 3G antenna height

- I. 3G antenna height , azimuth and tilt based on 3G planning. If there is no planning for 3G, 3G antenna parameters follow 2G antenna.
- II. If 3G planning height the same with 2G, and impossible to set antenna at the same level, the first priority of 3G antenna should be **under** 2G antenna within 3m distance. The second priority should be higher than 2G antenna within 3m distance.

## □ 3G antenna type and swap scenario

- I. The first priority is to install new single band 3G 2 ports antenna if all condition is ok(Space on tower/RT pole is ok, Bearing capacity is ok) (Need consider new pole for 3G antenna)
- II. If can not add separate antenna for 3G, following the guideline(BOQ and Antenna solution scenario\_20160120\_V3.0) based on scenarios.
- III. If existing 4 ports (1710–2200M) antenna for D1800. After swap, if D1800 only use 2 ports, U2100 can reuse another 2 spare space and Kyivstar provide additional RCU module for this antenna). New RCU module quantity need to mark in

# Antenna Scenarios


## Filters

- I. G900 Filters will be reused if existed on site.

## Documents

- I. 305 sites ZTE PP\_checked\_Send to Partners
- II. B0Q and Antenna solution scenario\_20160120\_V3.1

# Thank you



Tomorrow never waits

