

D200 Android Platform Software Program Introduction




www.caskaglobal.com

Overseas Customer
Service Department

Service for you sincerely

1. Core Board Program Introduction by SD Card

- 核心板软件烧录位置 The software position of cord board

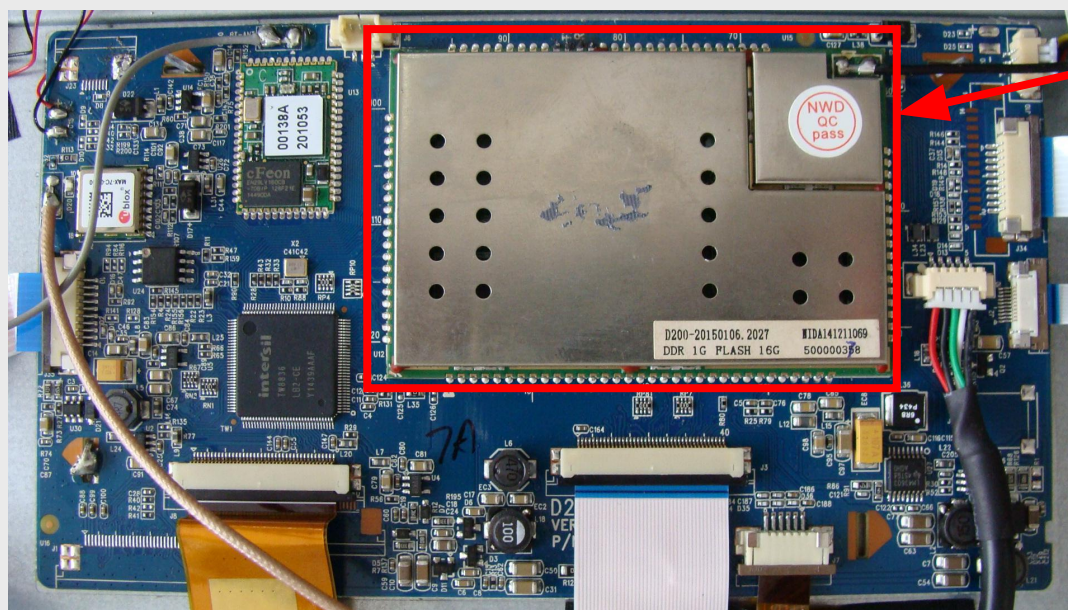

cord board position

pic 1-1 The software position of cord board

● 所需工具what you need: SD卡一张 One SD card

● 升级方法program method:

Step 1-1 把升级软件正确存入SD卡，具体如下图1-1所示；


Put the software into the root of SD card directly, like the pic 1-1 shows.



pic 1-2 Core board software in SD card

Step 1-2 插入SD卡, 然后开机

Put in the SD card and turn on the unit, like the pictures show below

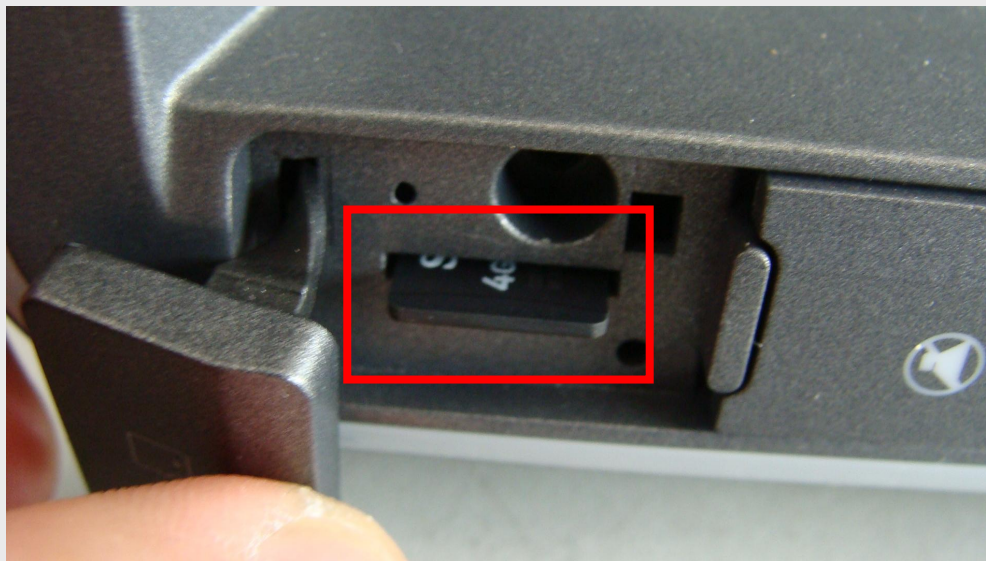

pic 1-3 插入SD然后开机 put in the SD card and turn on the unit

Step 1-3 手动设置启动核心板升级软件

Start the core board software by setting manually

具体步骤为:

主界面——Settings图标——“about”选项——“system updates”选项——“Start Update”选项——确认“system updates”——开始升级


Start the software programming:

unit main interface——Settings icon——“about” option——“system updates”option——“Start Update” option——affirm to “system updates”——start to update

The pictures below will show in detail




主界面 unit main interface

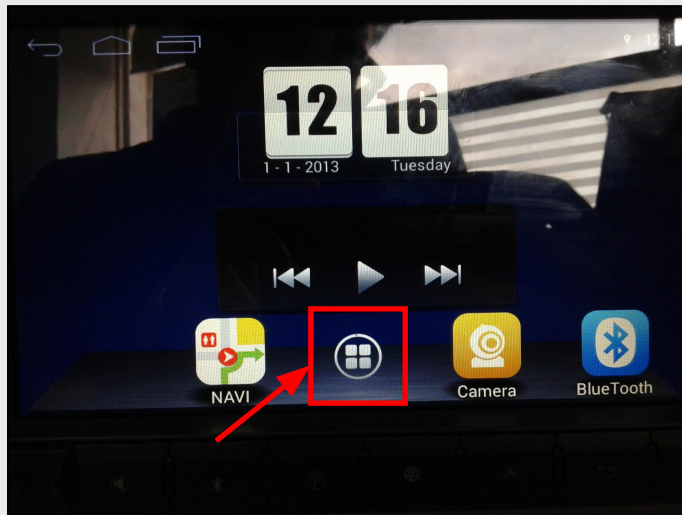


pic 1-4 main interface

选择Settings图标 Choose Settings icon

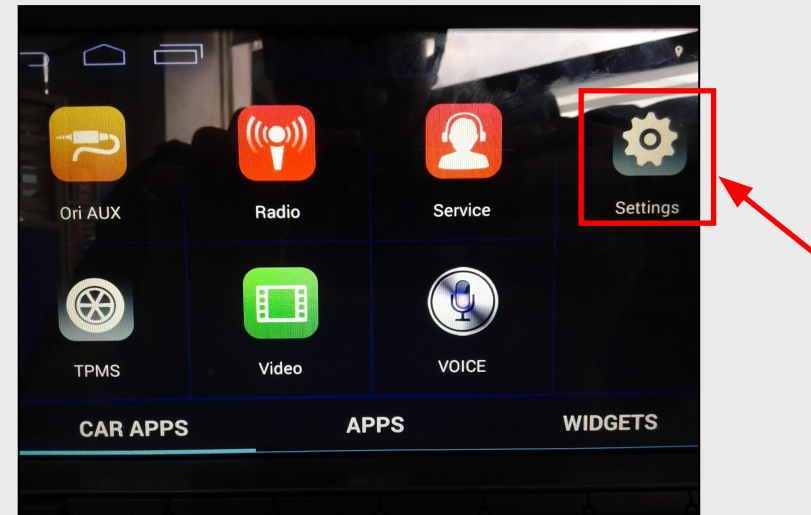


pic 1-5 Choose Settings icon

选择“about”选项
Choose "about" option

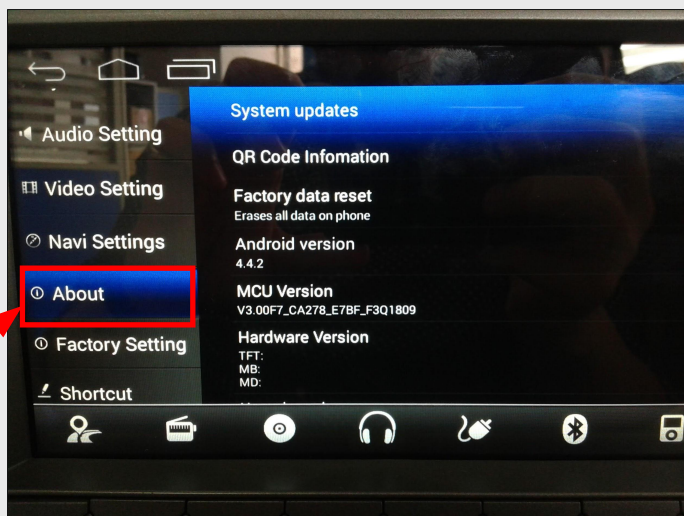

pic 1-6 Choose "about" option


选择"system updates"选项
Choose "system updates" option

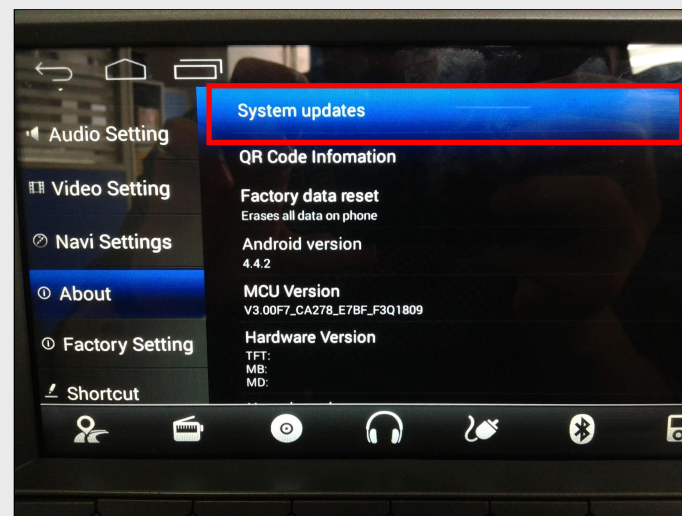

pic 1-7 choose "system updates" option


1. Core Board Program Introduction by SD Card

选择 “Start Update” 选项
Choose “Start Update” option

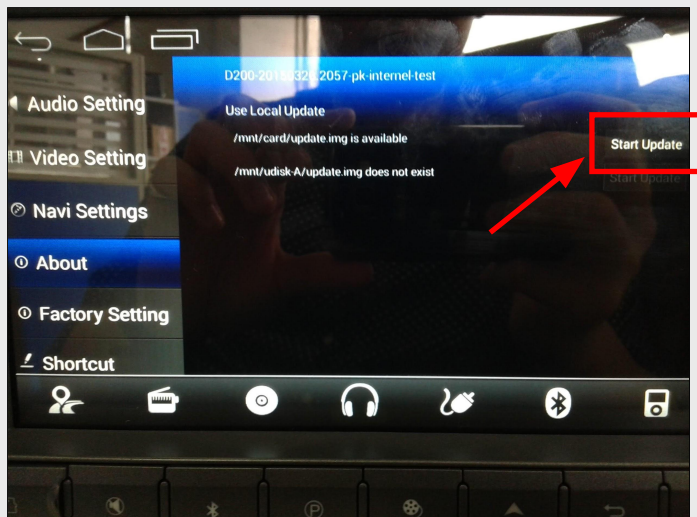

pic 1-8 Choose “Start Update” option


选择 “system updates” 确认开始升级
Choose “system updates” option to affirm start it

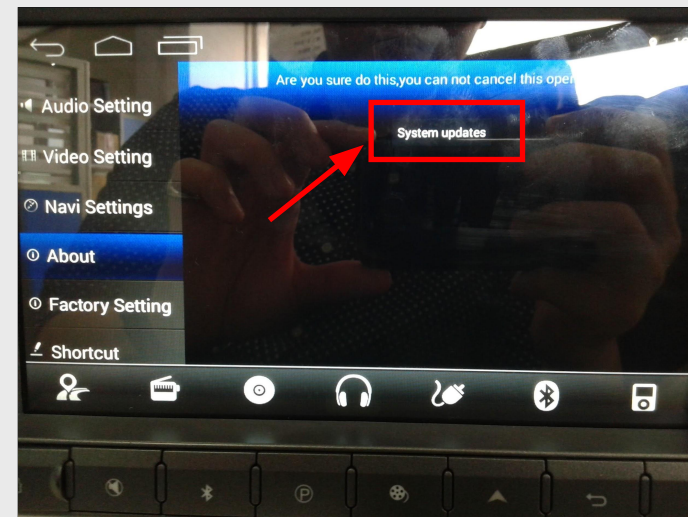

pic 1-9 Choose “system updates” option


1. Core Board Program Introduction by SD Card

开始升级
start to upgrade

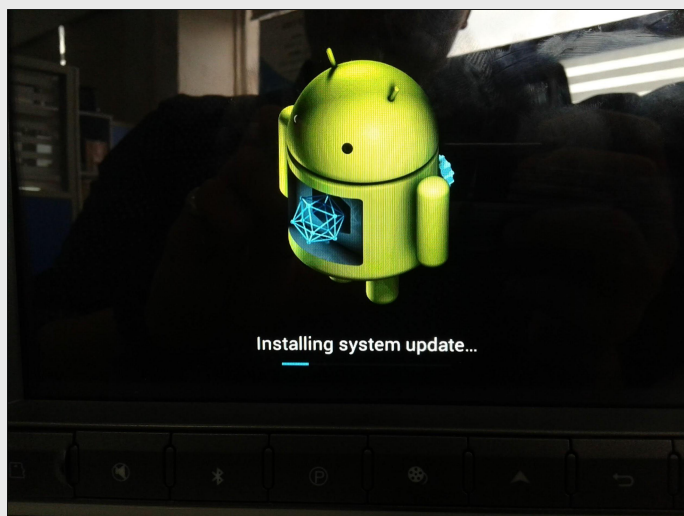

pic 1-10 upgrading

升级完成系统自动重启
unit restart after upgrade successfully

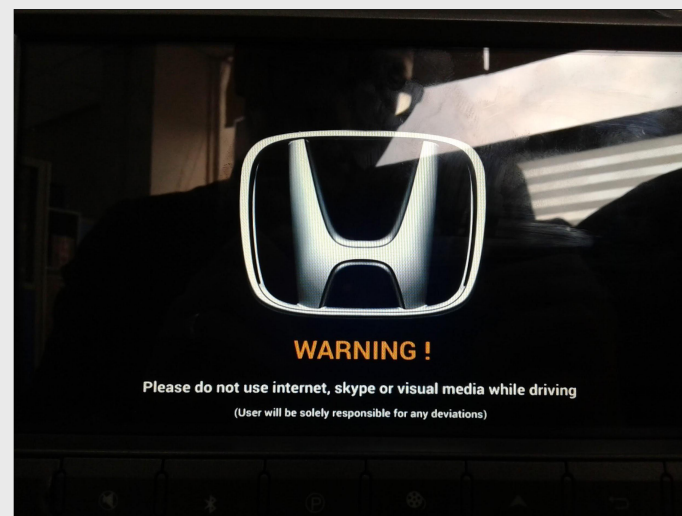


pic 1-11 unit restart




3. Factory data reset

所有软件升级完后，你必须复位主机

After finish upgrade, Must be Factory data reset

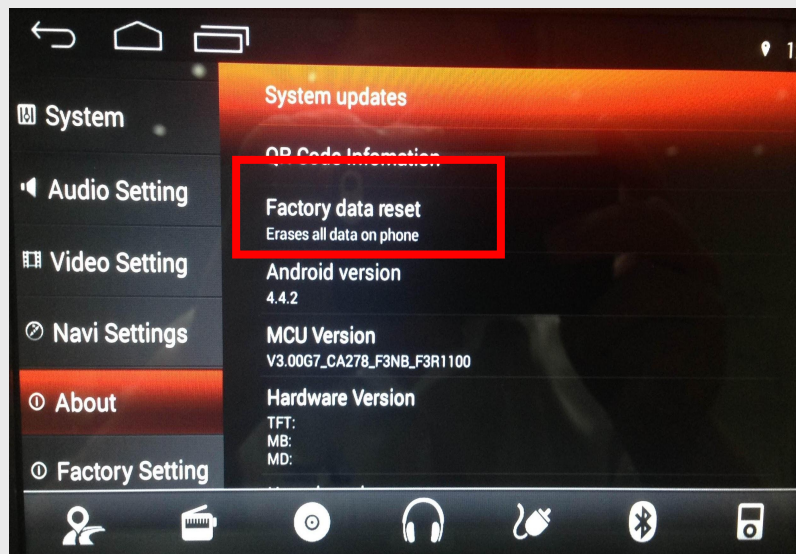


click Factory data reset

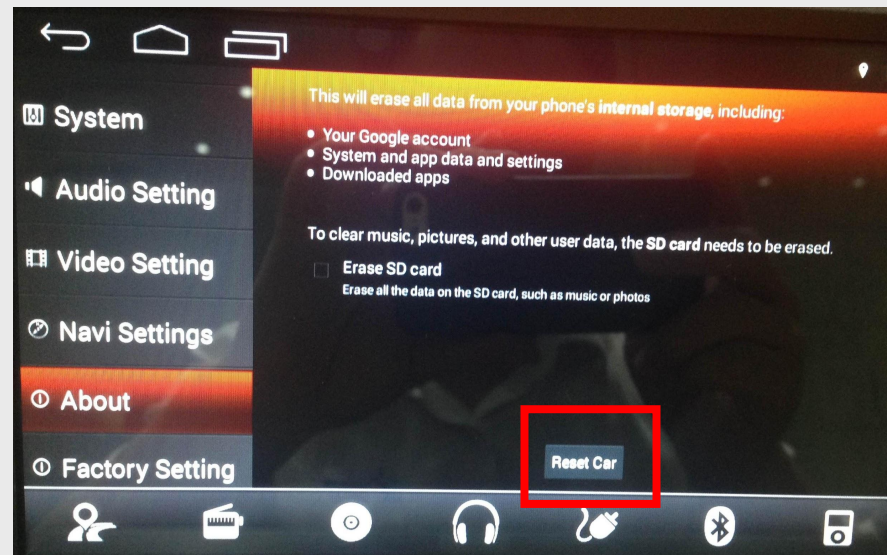


Than click Reset Car

所有软件升级完后，你必须复位主机

After finish upgrade, Must be Factory data reset

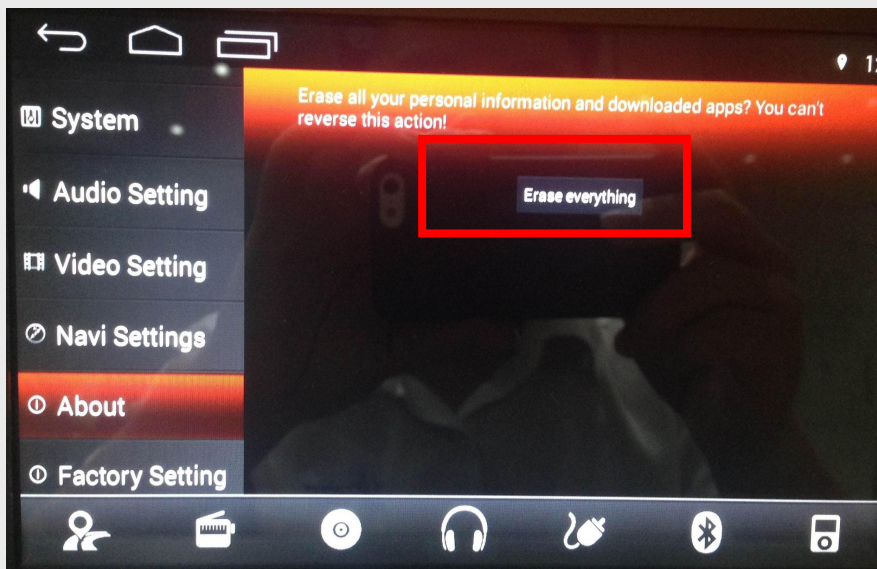


Click Erase everything, the unit will restart automatically

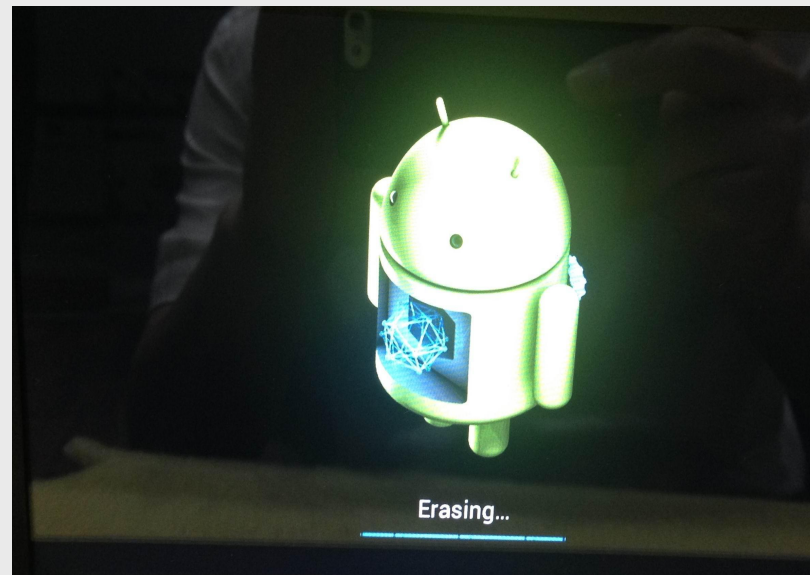


restart interface

所有软件升级完后，你必须复位主机

After finish upgrade, Must be Factory data reset. Complete this step to complete all the unit upgrade.

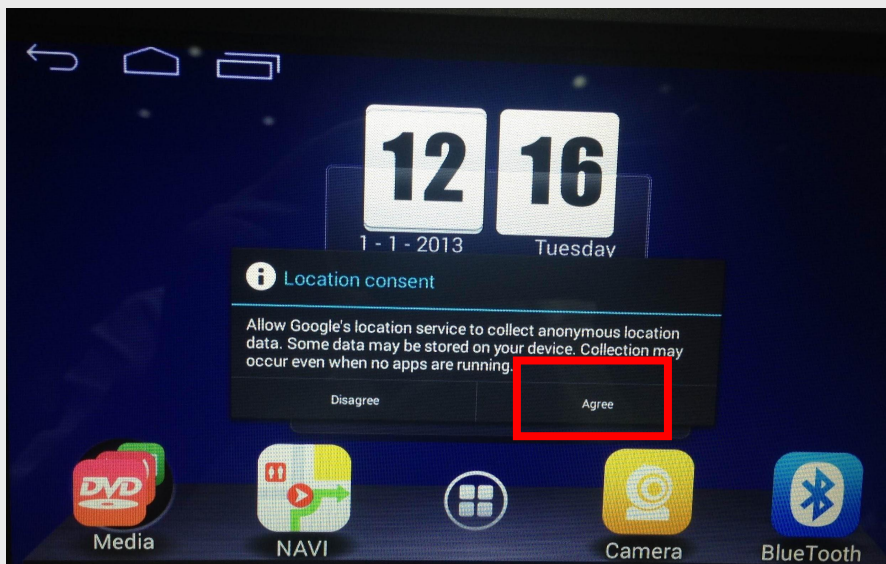

Then click Agree

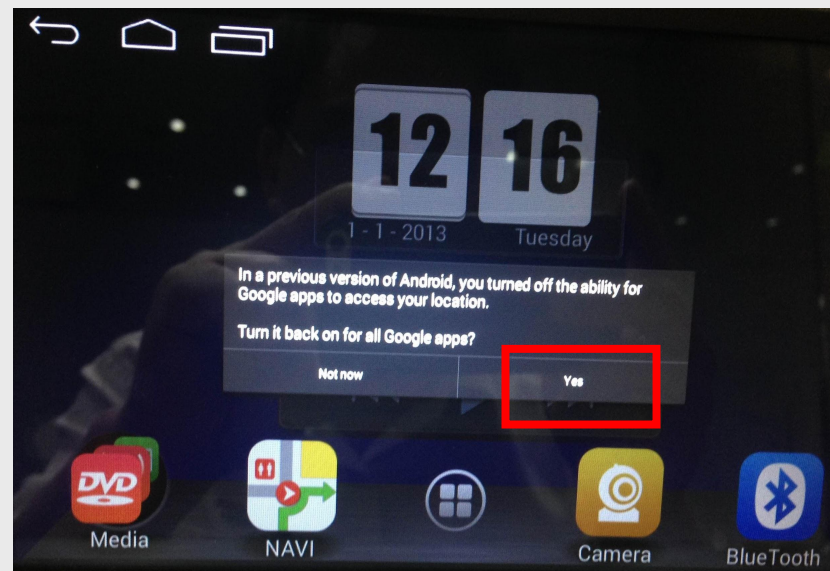

Click Yes, finish the unit Factory data reset, explain all upgrade finish



Thank you!



www.caskaglobal.com

Overseas Customer
Service Department

Service for you sincerely