

Зайдите в программу B2B и нажмите Tool & Download, затем Download user manual

The screenshot shows the 'LGST\_Service Center Tool' window with the 'Tool & Download' menu open. The menu options are 'Phone S/W File Download' and 'Download user manual.'. Below the menu, there are three sections: 'System Notification', 'Applications & Manual new version notice', and 'New Software version notice'. Each section contains a table of updates.

**System Notification**

TITLE	Options	LAST UPDATE DATE
W200 series All in one Data cable (add cradle) Guide		2015-11-03
[Guide] Android Models Error Message occurs when select google s...		2015-10-27
[Notice] Guide to Smart Boot Diagnosis_Oversea_Rev3.3_20150922		2015-09-21
LGUnitedMobileDriver_S52MAN314AP22_ML_WHQL_Ver_3.14.1		2015-09-16
MC_Board Usage Improvement Point for 3rd Best Practice Guide		2015-08-26
Flash Video Guide for Smart Multi Test JIG		2015-08-19
New G4 Gender of Common Dummy Battery Test JIG		2015-08-19
[Notification] G4 Series_Rev1.0_Add Wifi Chipset Underfill Dispensing...		2015-08-10
KK to L OS upgraded model function Test Guide_Rev1.0		2015-07-09
Nexus5 series_Rev1.0 Download Mode Entrance Guide_20150630		2015-07-01


**Applications & Manual new version notice**

COUNTRY	MODEL	VERSION	LAST UPDATE DATE
Global	LGH791	TC_CD_20151104	2015-11-04
Russian Federation	LGH818P	SMANUAL_1.0	2015-11-04


**New Software version notice**

COUNTRY	MODEL	BUYER	VERSION	SUB VERSION	LAST UPDATE DATE
Kazakhstan	LGD392K	KAZ	V10d	00	11-03-2015


В окошко поиска вводите модель телефона и нажимаете на лупу.  
Далее в списке выбираете самую последнюю версию S/W Download Tool (по дате релиза)  
Данная процедура проделывается 1 раз, **но обязательно проверять последнюю версию FalshTool для корректного прошивания телефона.**

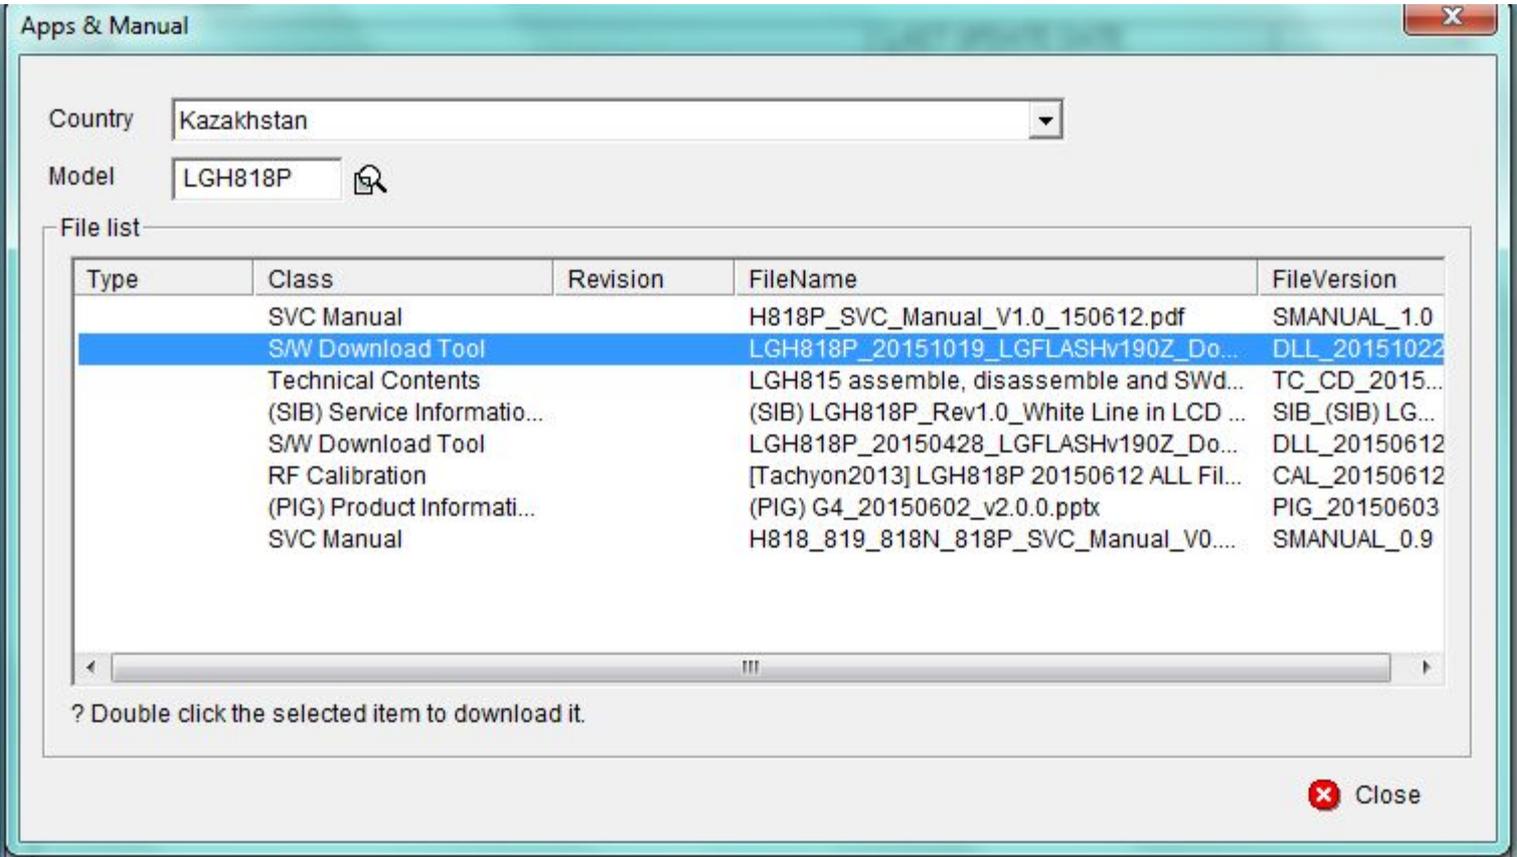

**Скачается архив с программой и мануалом.**

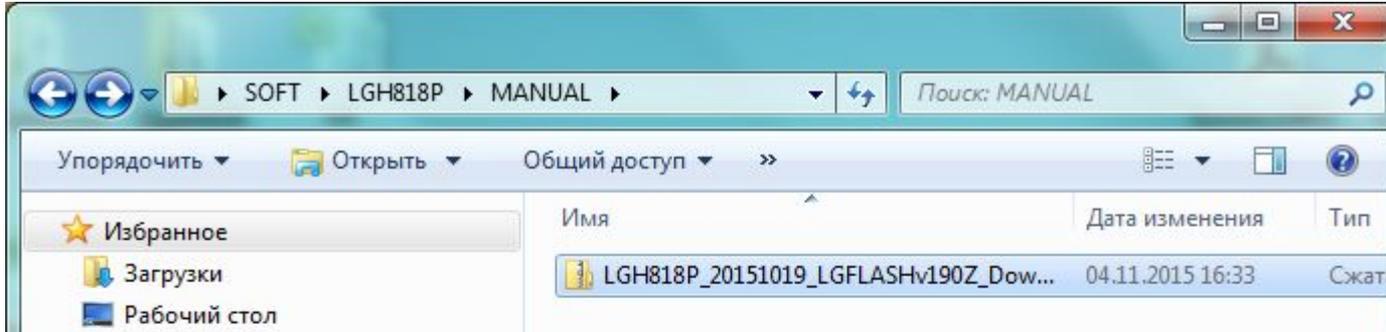

**В папке будет программа Flash Tool последней версии, установите его.**

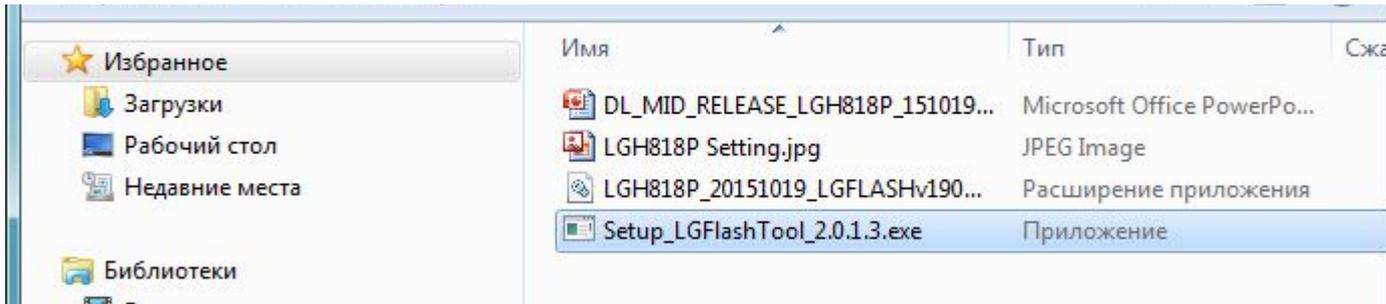

**Предварительно скачайте прошивки с B2B (Файлы DLL и BIN) и РАЗархивируйте файлы  
Запустите Flash tool**




Предварительно подключите телефон для прошивки к компьютеру через прошивочный кабель с парт номером RAD32167835.

При появлении этого окна, поставьте галочку **Select Manual Mode** и укажите путь к DLL в окошко **DLL** И **BIN** в окошке **S/W** и нажмите **OK**



The screenshot shows a 'Model Config' window with the following elements:

- Select Manual Mode
- DLL**: Text field containing 'D:\Home\Desktop\MC B2B\H818P\LGH818P\_20150428\_LGFLASHv190Z\_Download\LGH818P\_20150428\_LGFLASHv...' with a browse button (...).
- S/W**: Text field containing 'D:\Home\Desktop\MC B2B\H818P\LGH818PAT-00-V10d-DS1-HQ-AUG-18-2015+0.tot' with 'Add', 'Remove', and 'Remove All' buttons.
- PRL & SCRIPT**: A table with columns 'TYPE' and 'FILE PATH', and 'Add' and 'Remove' buttons.
- Action Mode**: Radio buttons for 'UPGRADE DL' (selected), 'PRL & SCRIPT DL', and 'BOARD DL'.
- Connection Mode**: Radio buttons for 'USB' (selected), 'LAN', and 'UART', with a 'BaudRate' dropdown menu.
- Equipment Mode**: An empty text field.
- Enable XML log, with an empty text field and a browse button (...).
- Buttons for 'OK' and 'Cancel' at the bottom right.


Кликните 1 раз на ярлык *Мой Компьютер* и нажмите правую кнопку мыши.  
Далее нажмите *Управление*

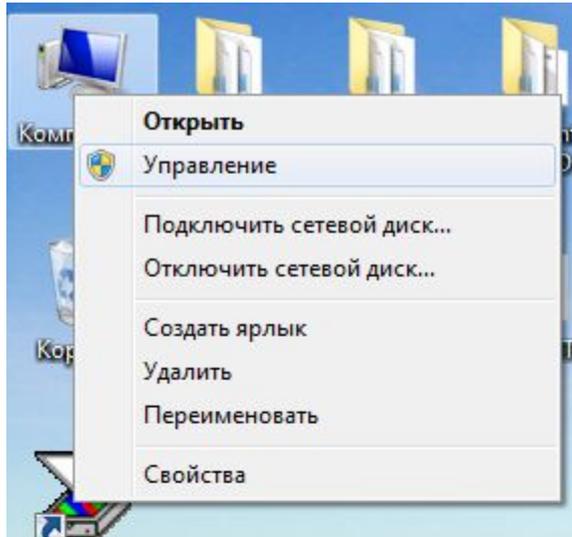


Далее нажмите на **Диспетчер Устройств**  
Выберите **Порты (COM и LPT)** и нажмите правую кнопку мыши и **Свойства**

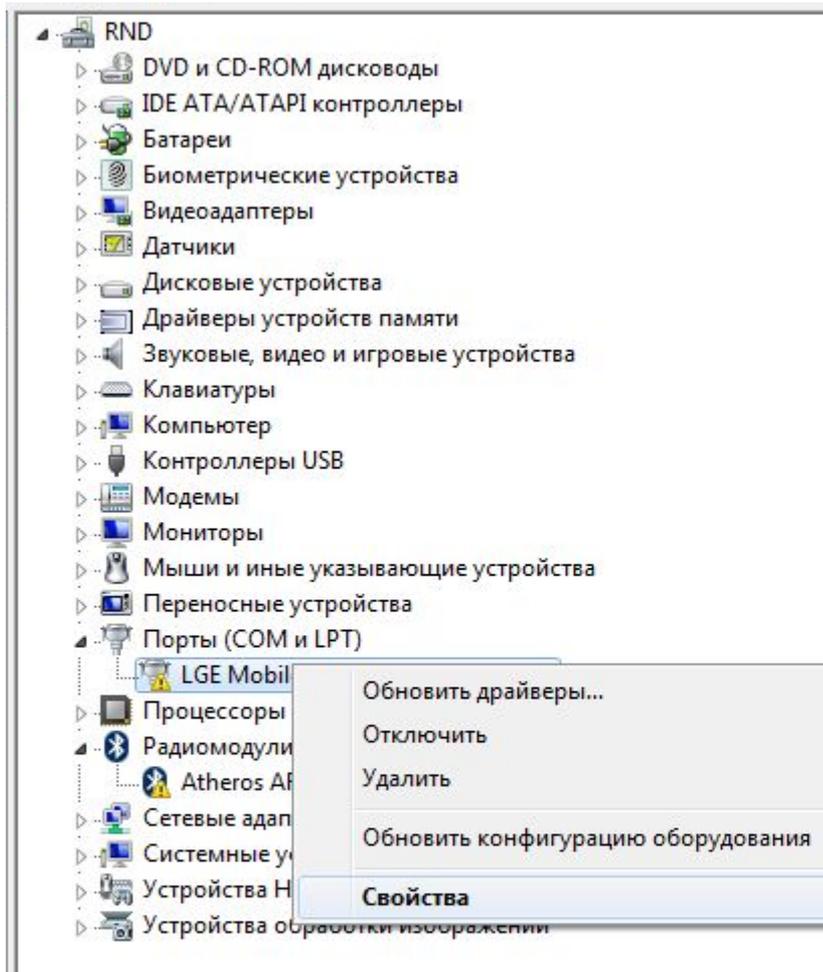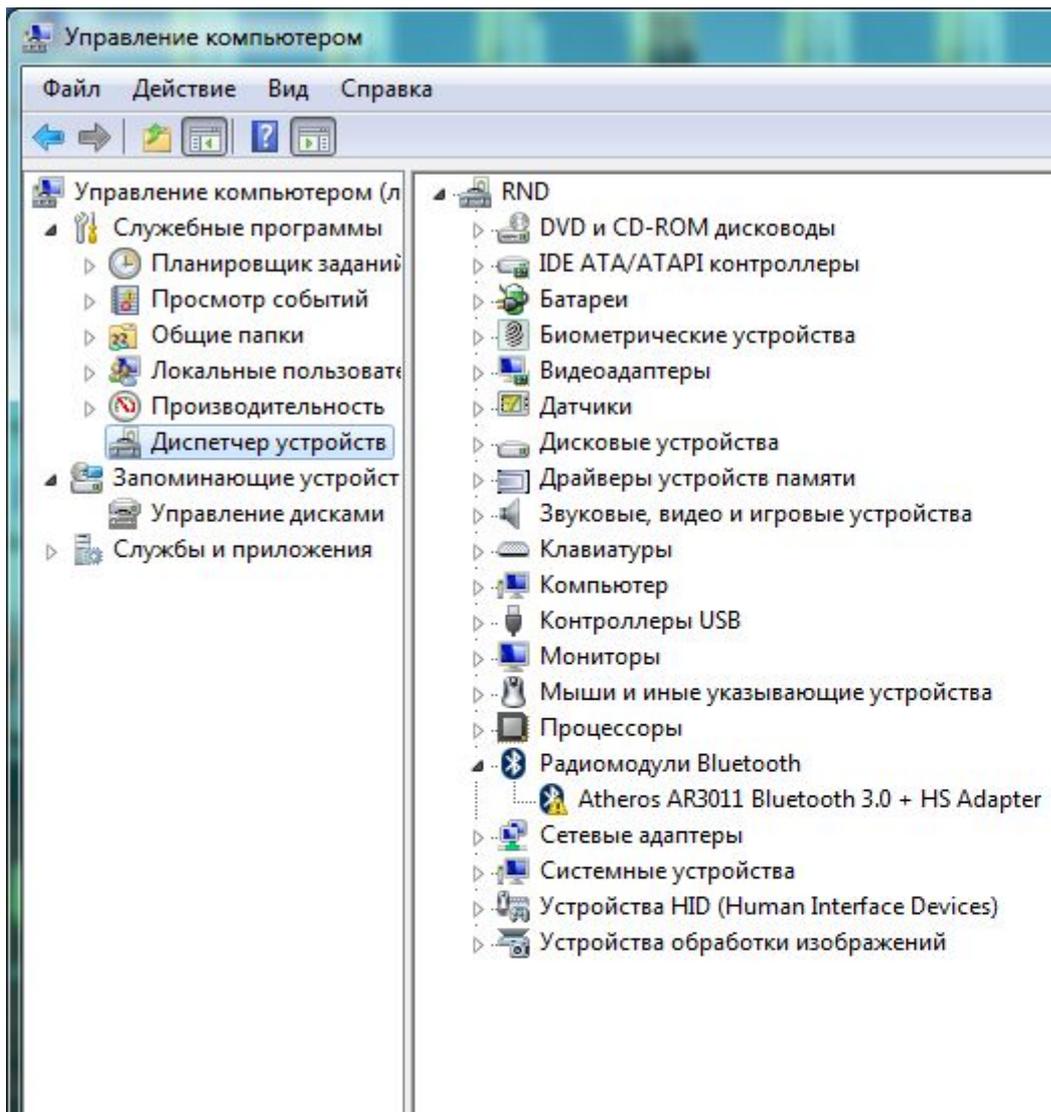

Далее нажмите на вкладку **Параметры**

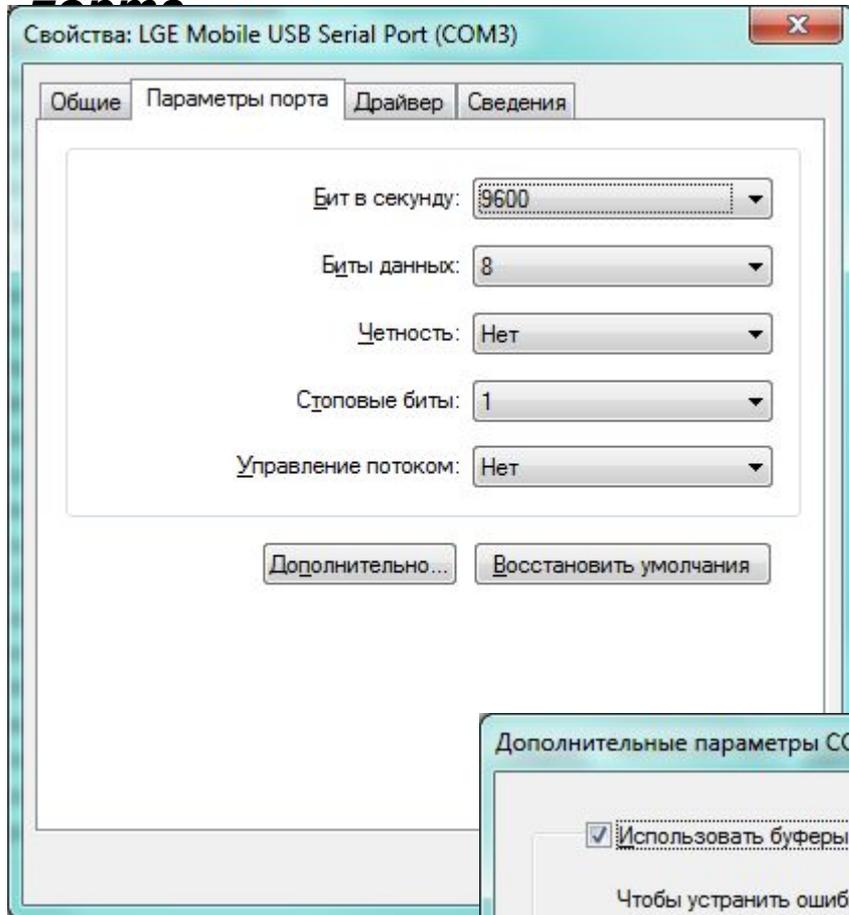

Далее нажмите на кнопку **Дополнительно...** и выберите Номер COM-порта который присутствует в Flash Tool

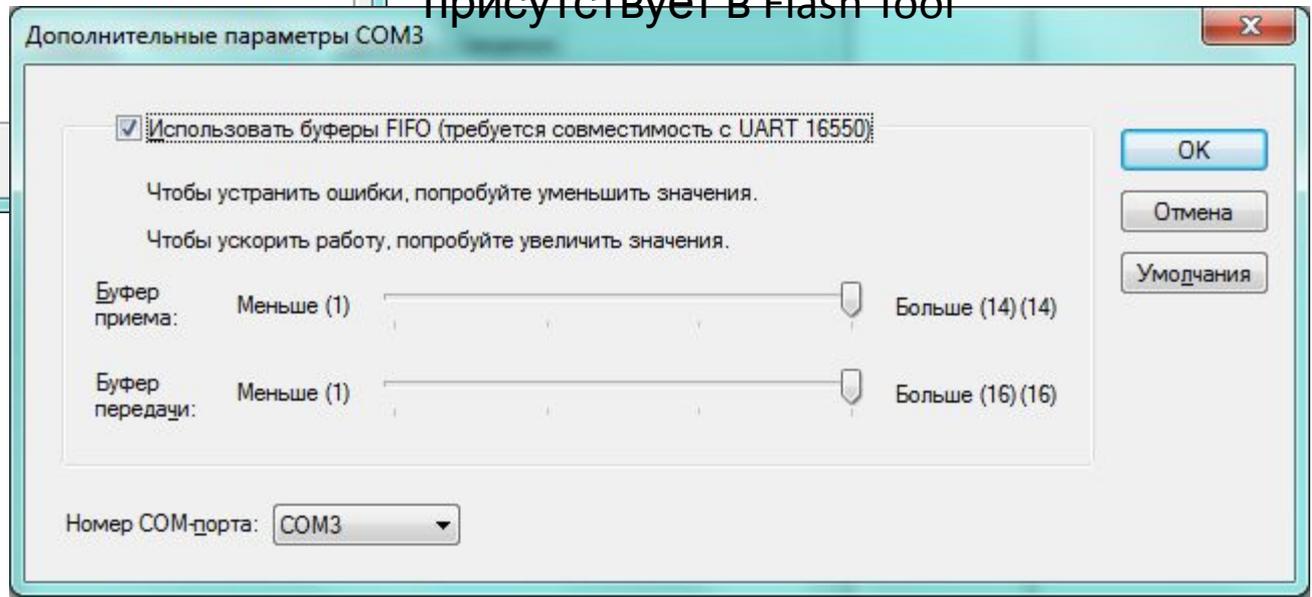

Если вы выбрали 1-ый COM порт и нажали стрелочку программа начнёт прошивать телефон и после прошивки выйдёт сообщение **Pass**.



В комплекте каждой прошивки есть мануал с указанием Сопротивления кабеля

для прошивки определённого телефона (56К либо 910К).

В режиме OPEN вы можете использовать кабель в виде USB.

