

The Space Environment



Samara University
May 23-24, 2018

Dr. Jordi L. Gutiérrez
Department of Physics
Universitat Politècnica de Catalunya


Effects of the Space Environment

There are several phenomena that have a significant impact on Space Systems Architecture

- Microgravity
- Van Allen belts
- High altitude atmosphere
- High vacuum
- Solar radiation (thermal control subsystem)
- Ionizing radiation


A single energetic particle can produce a single event phenomenon that seriously affects electronics

Space Weather

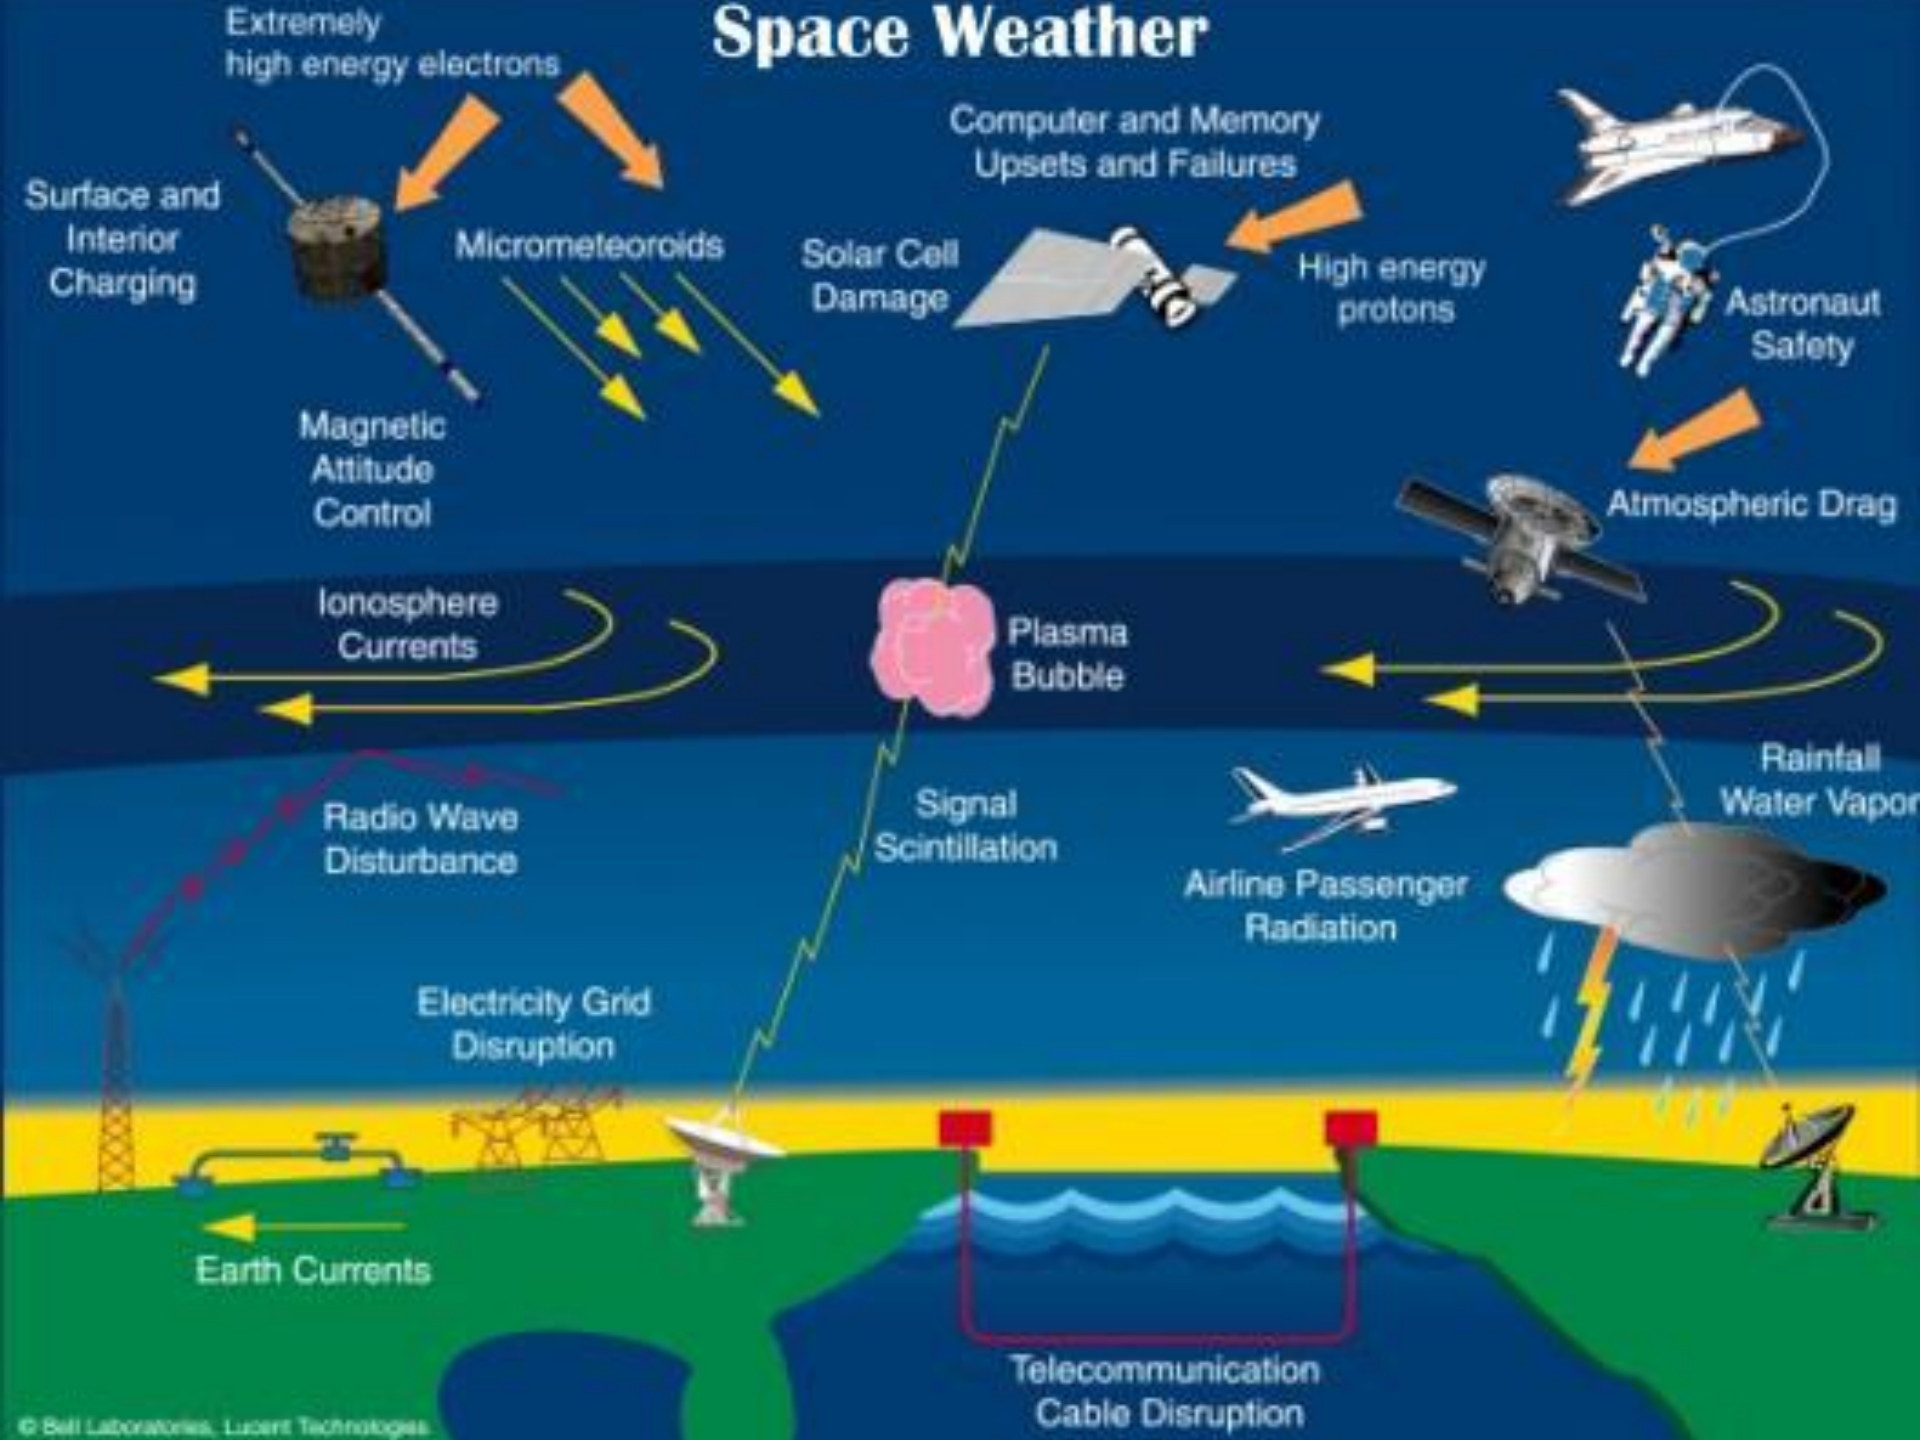

The gravitational field


- Obviously, all satellites in orbit around the Earth (or any other object) are experiencing an intense gravitational field
- The reason for them being in microgravity conditions is that they are in free-fall (equivalence principle), as was noted by Newton

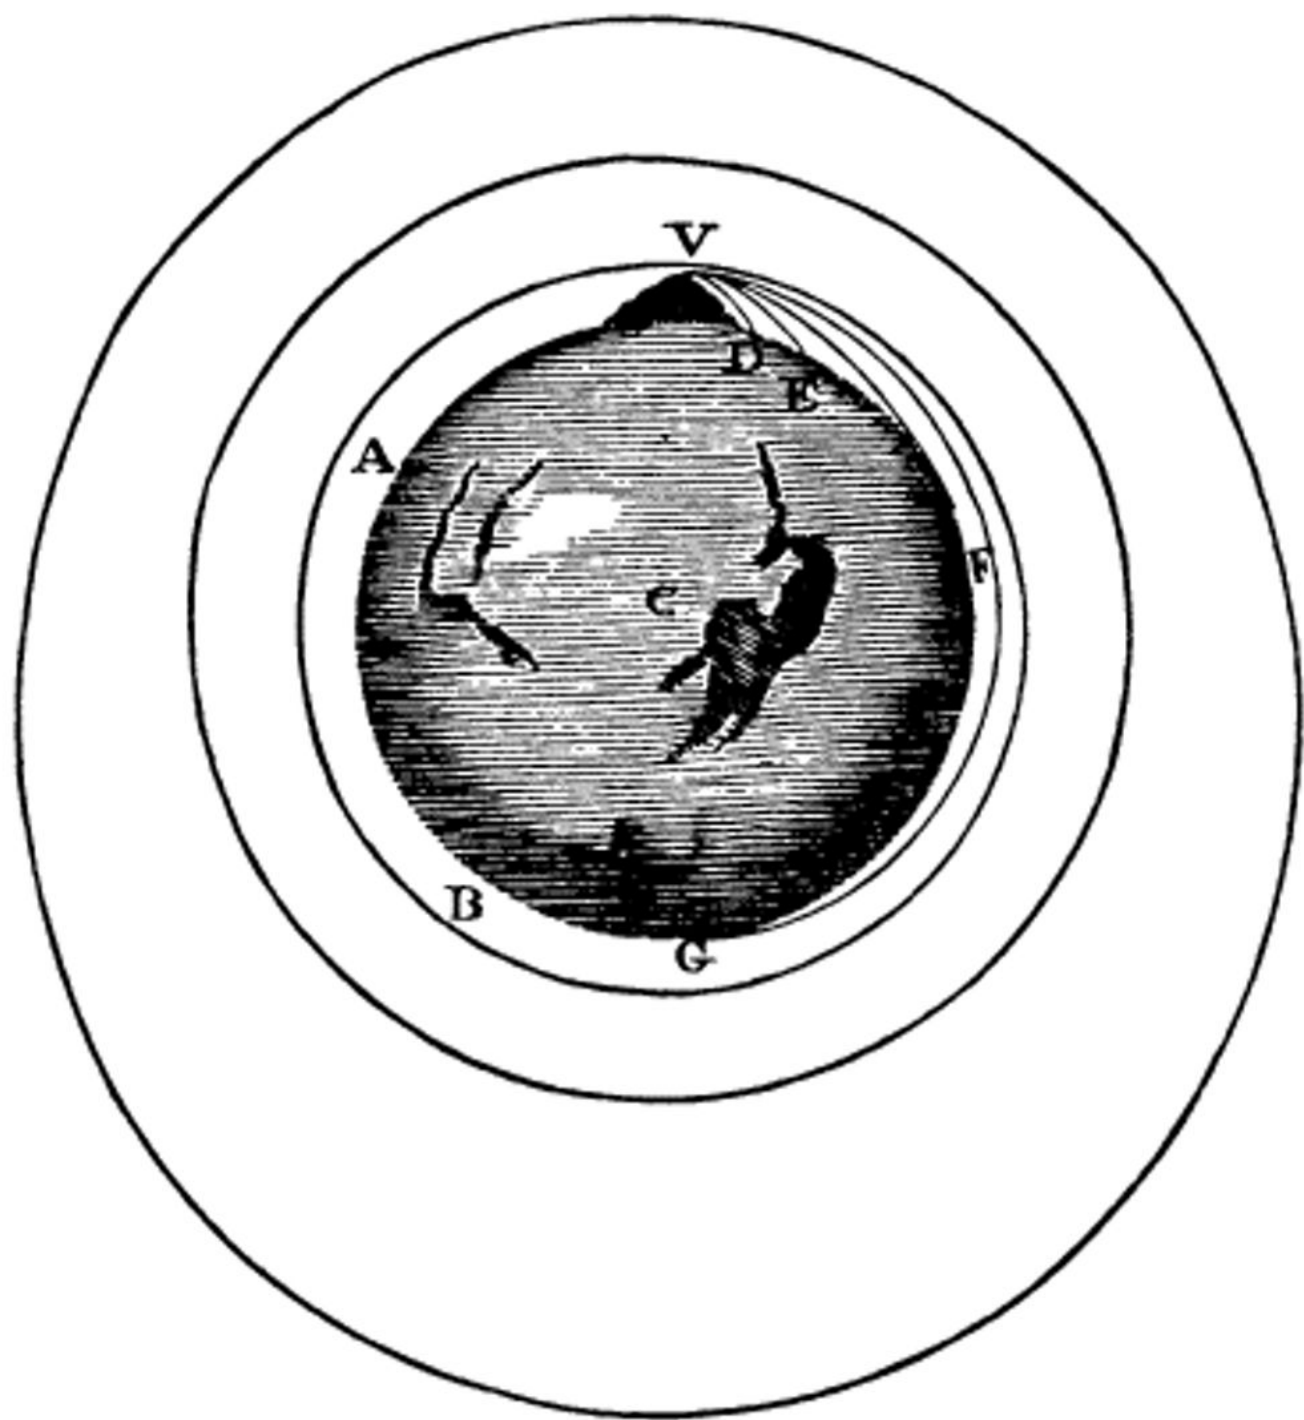

Simulating microgravity

- Then, it is possible to simulate microgravity by letting fall an object (better in a reduced density atmosphere):
 - Drop towers
 - Parabolic flights
 - Small rockets
- This is always an approximation, and the duration of these tests is rather limited (from seconds to minutes)




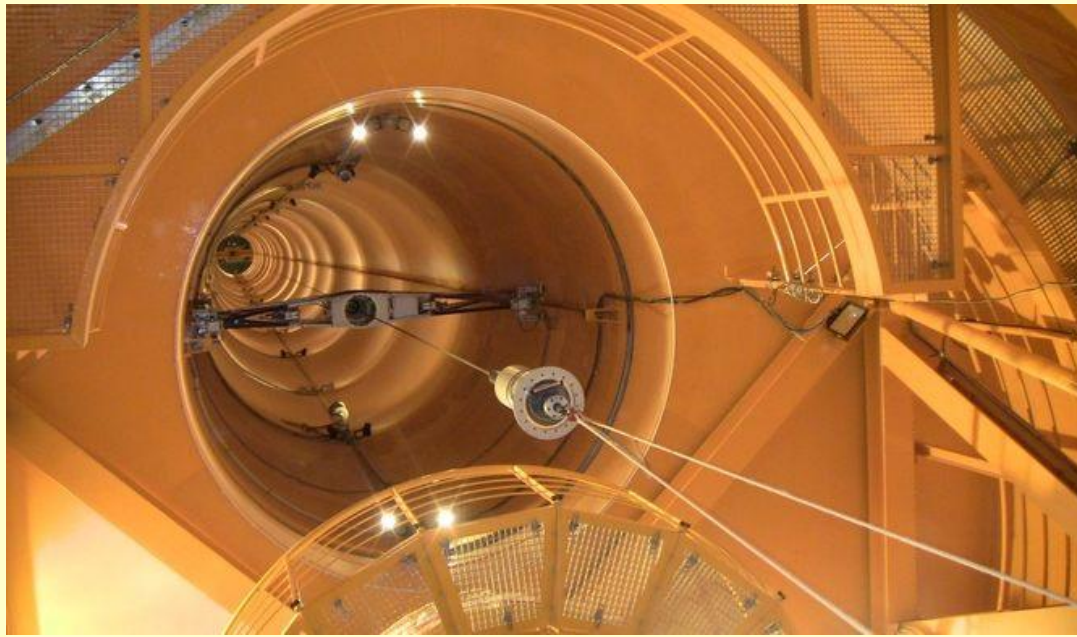

Interior of the Bremen test tower






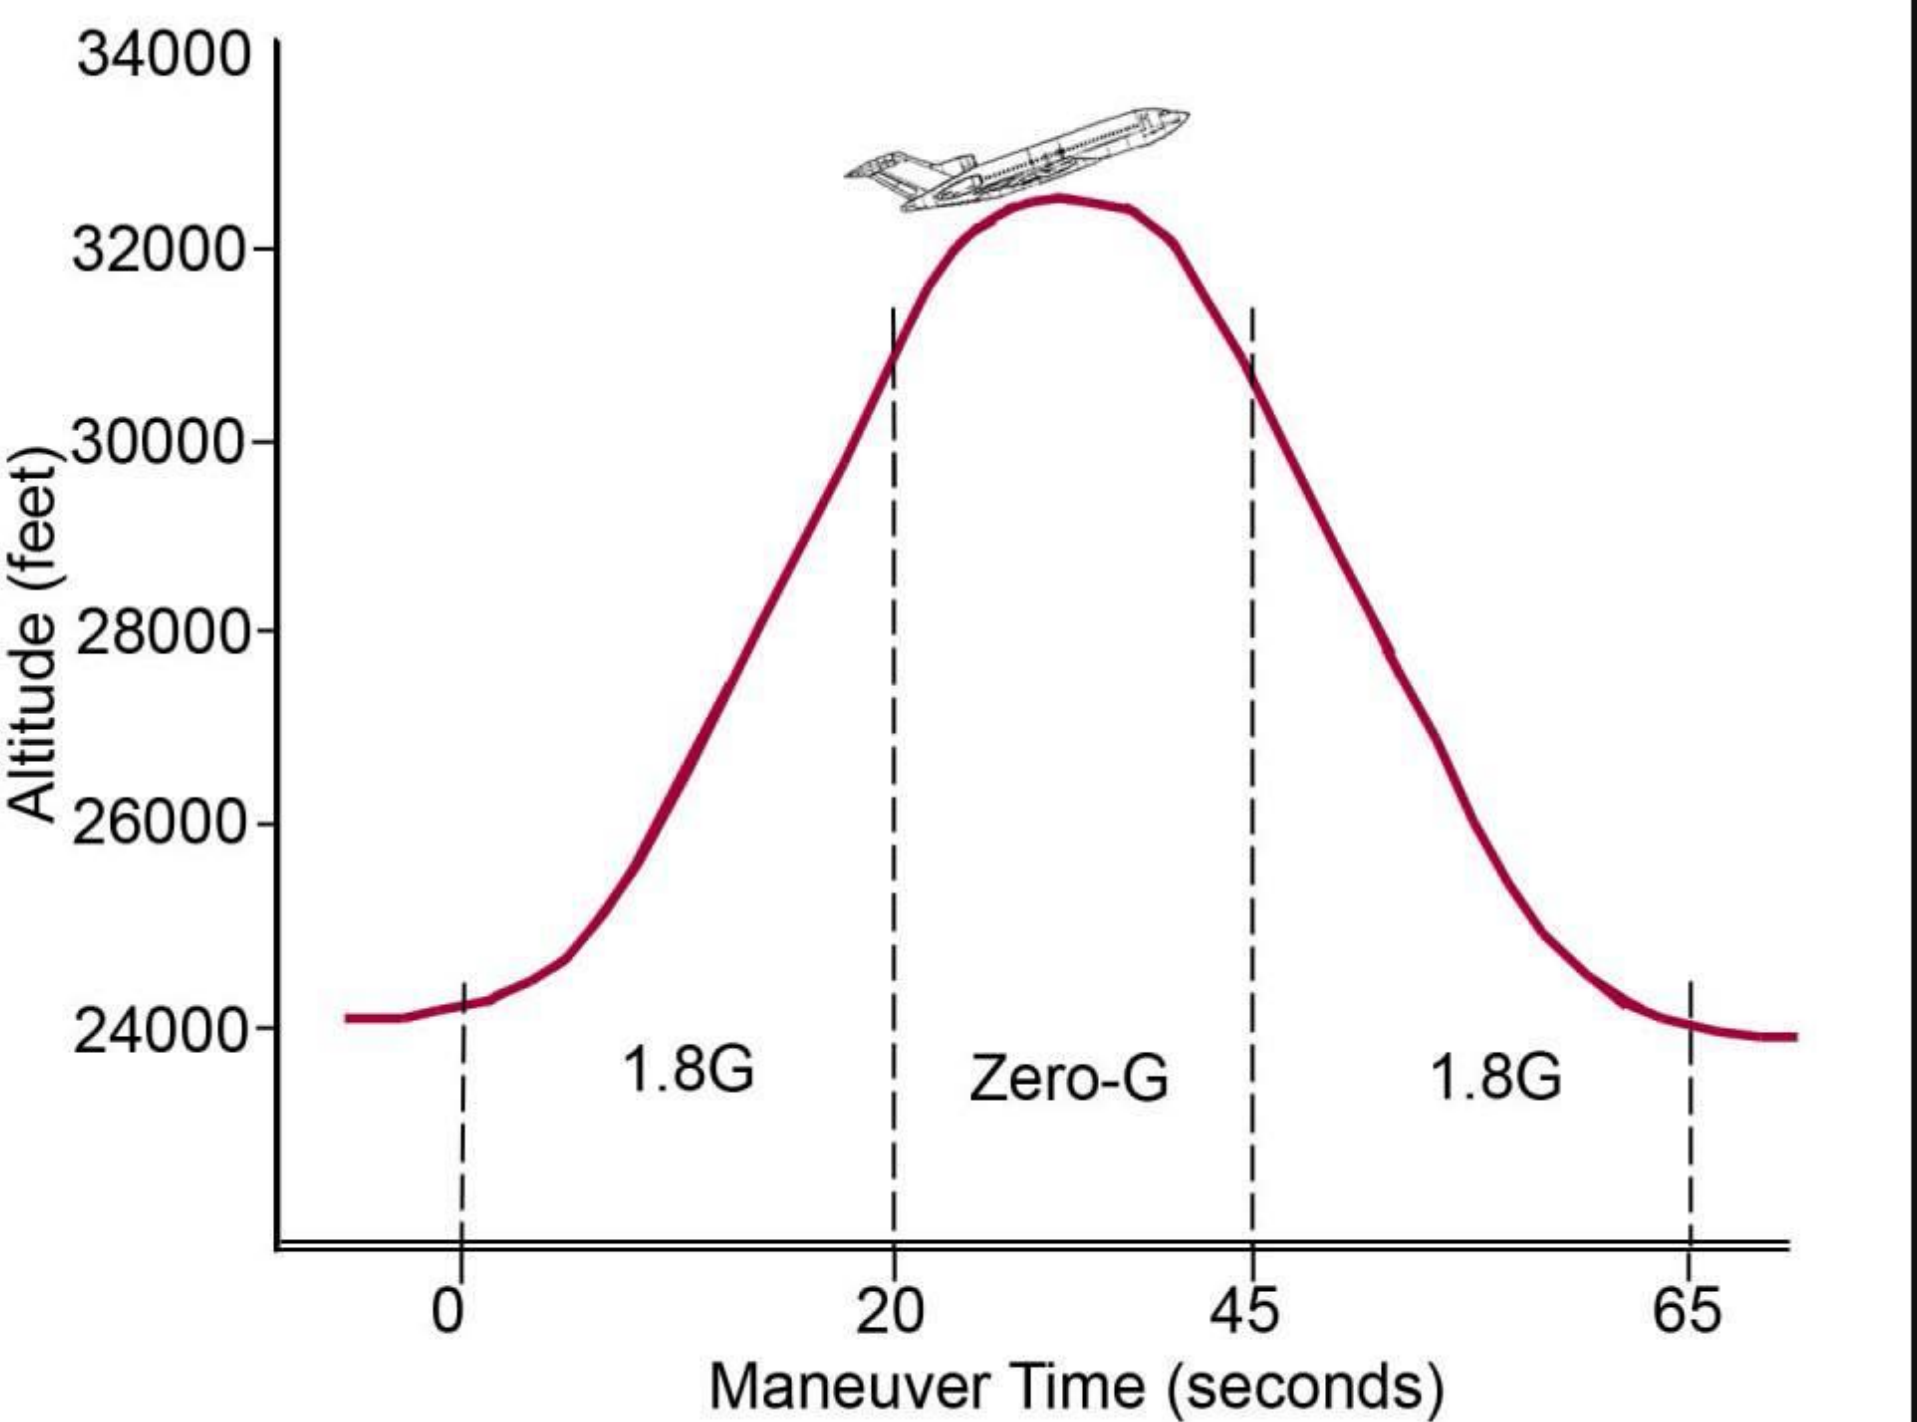



ESA's REXUS rocket

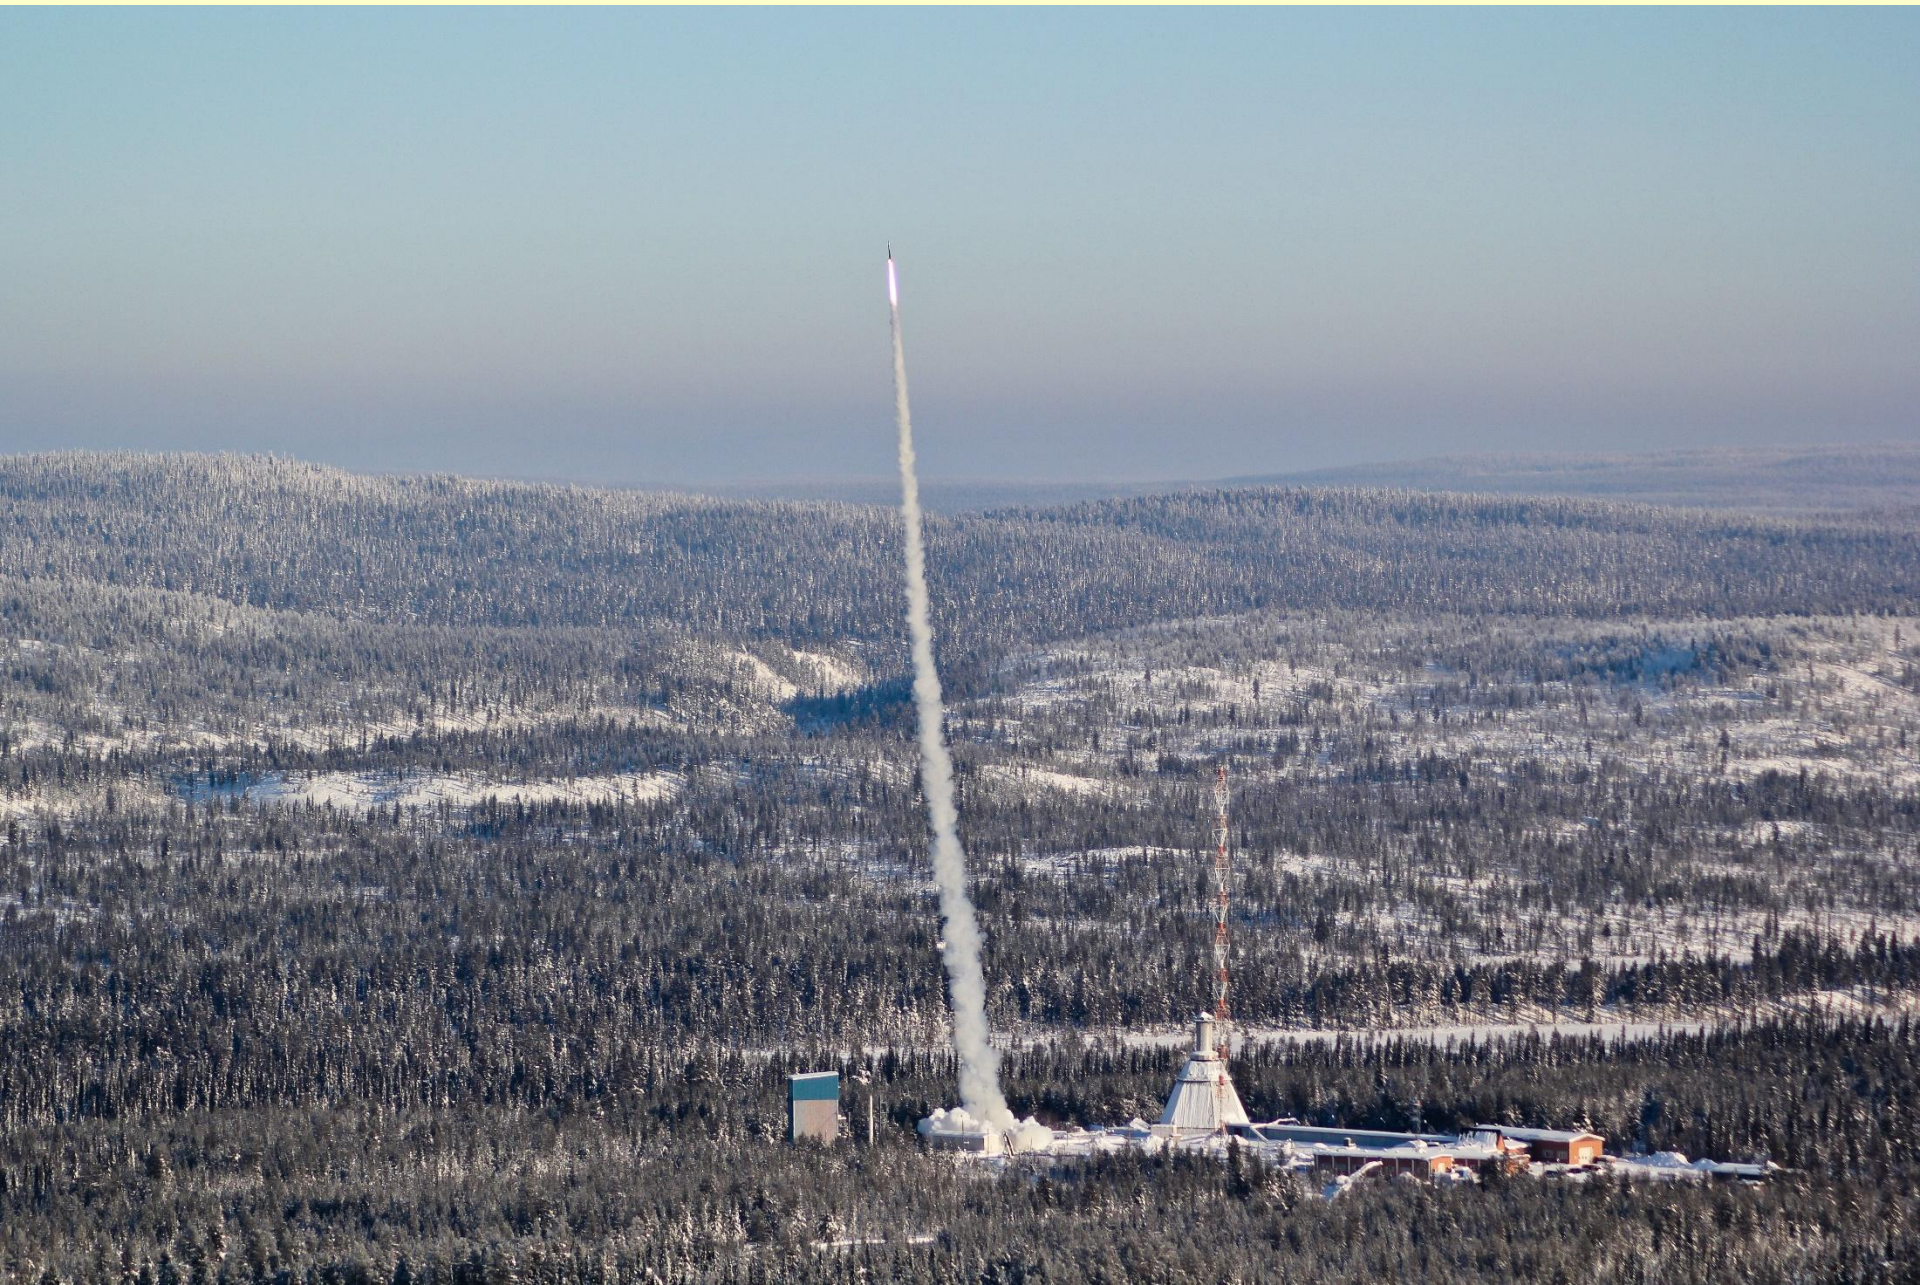


Gravitational field

- The gravitational field of the Earth can be expressed in terms of a power series


$$U(r, \theta, \lambda) = \frac{\mu}{r} \left[1 - \sum_{l=2}^{\infty} J_l \left(\frac{R_{\oplus}}{r} \right)^l P_l[\sin \phi] + \sum_{l=2}^{\infty} \sum_{m=1}^l \left(\frac{R_{\oplus}}{r} \right)^l P_{l,m}[\sin \phi] \{ C_{l,m} \cos \lambda + S_{l,m} \sin \lambda \} \right]$$

where


$$\mu = GM_{\oplus}$$

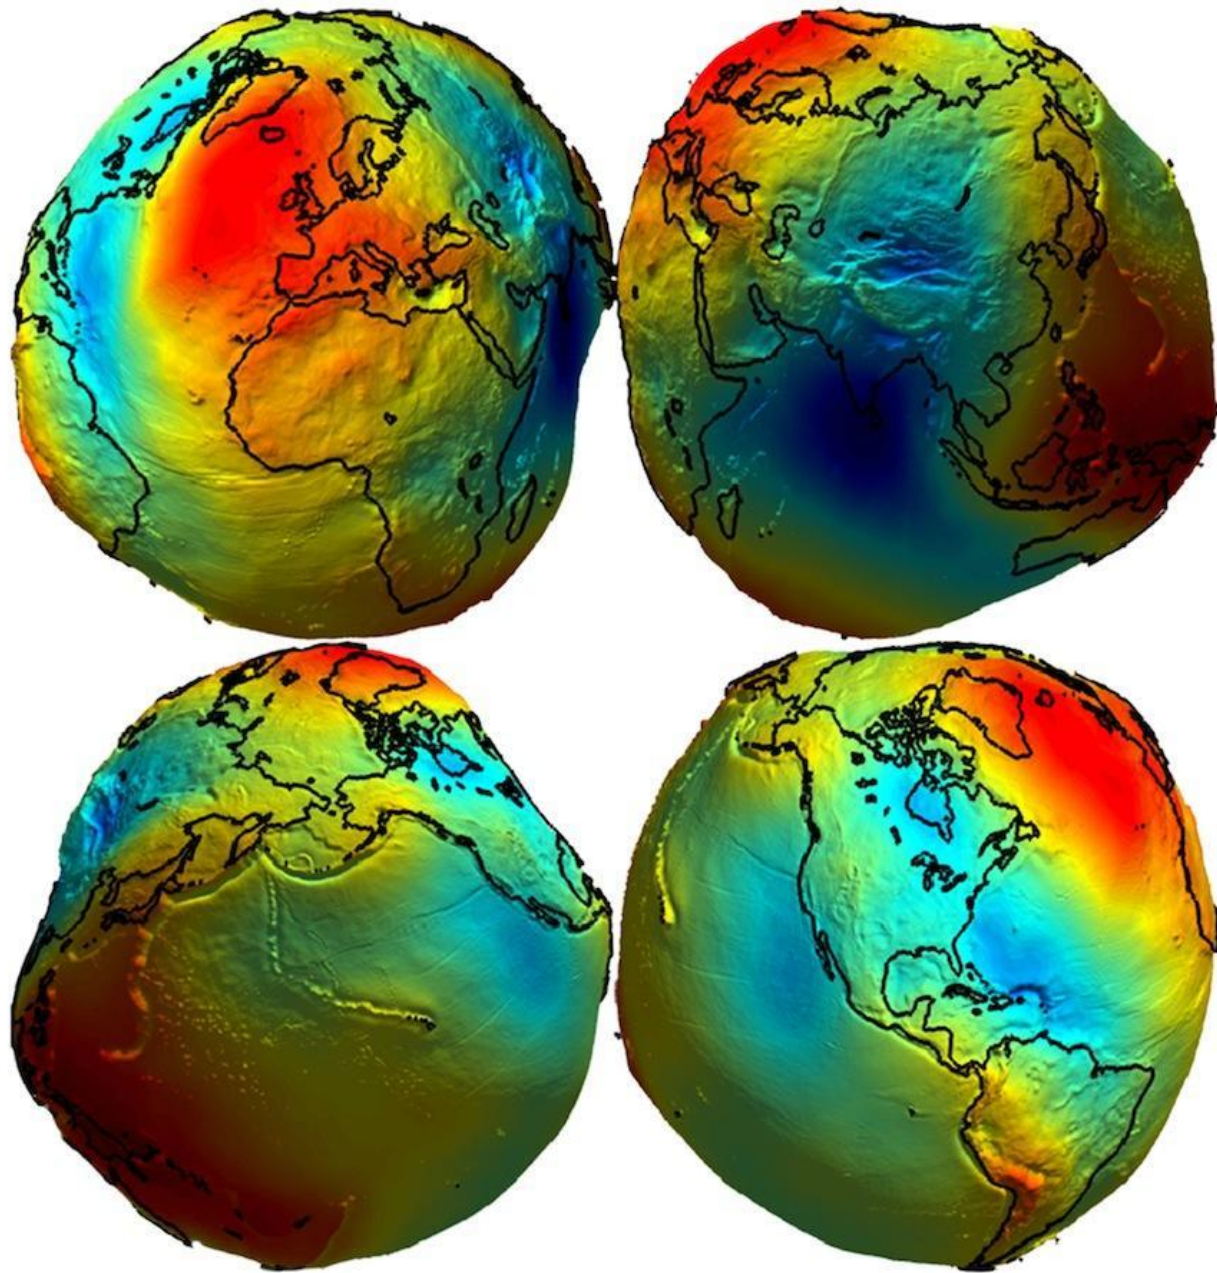

Geoid height (EGM2008, nmax=500)

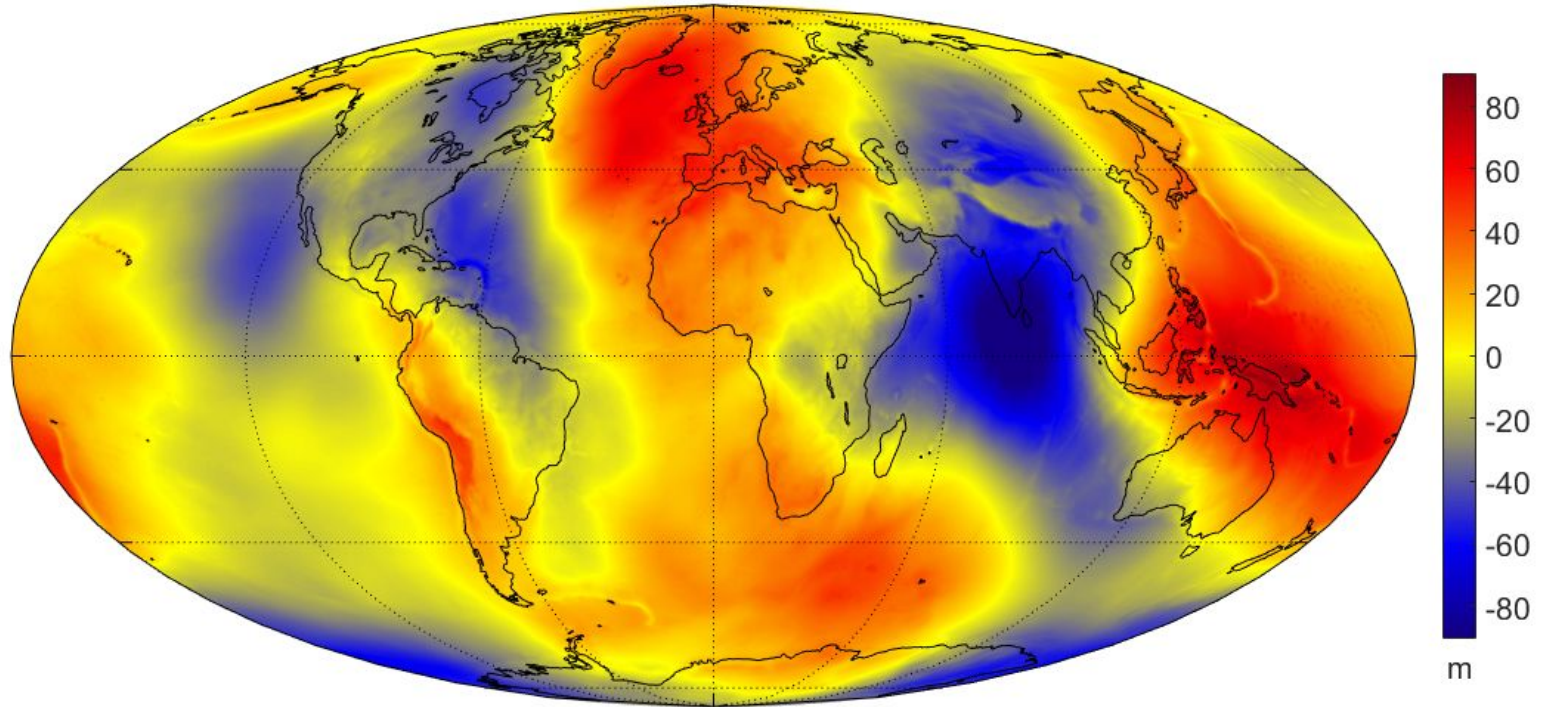



Other celestial bodies have, obviously, different gravitational fields

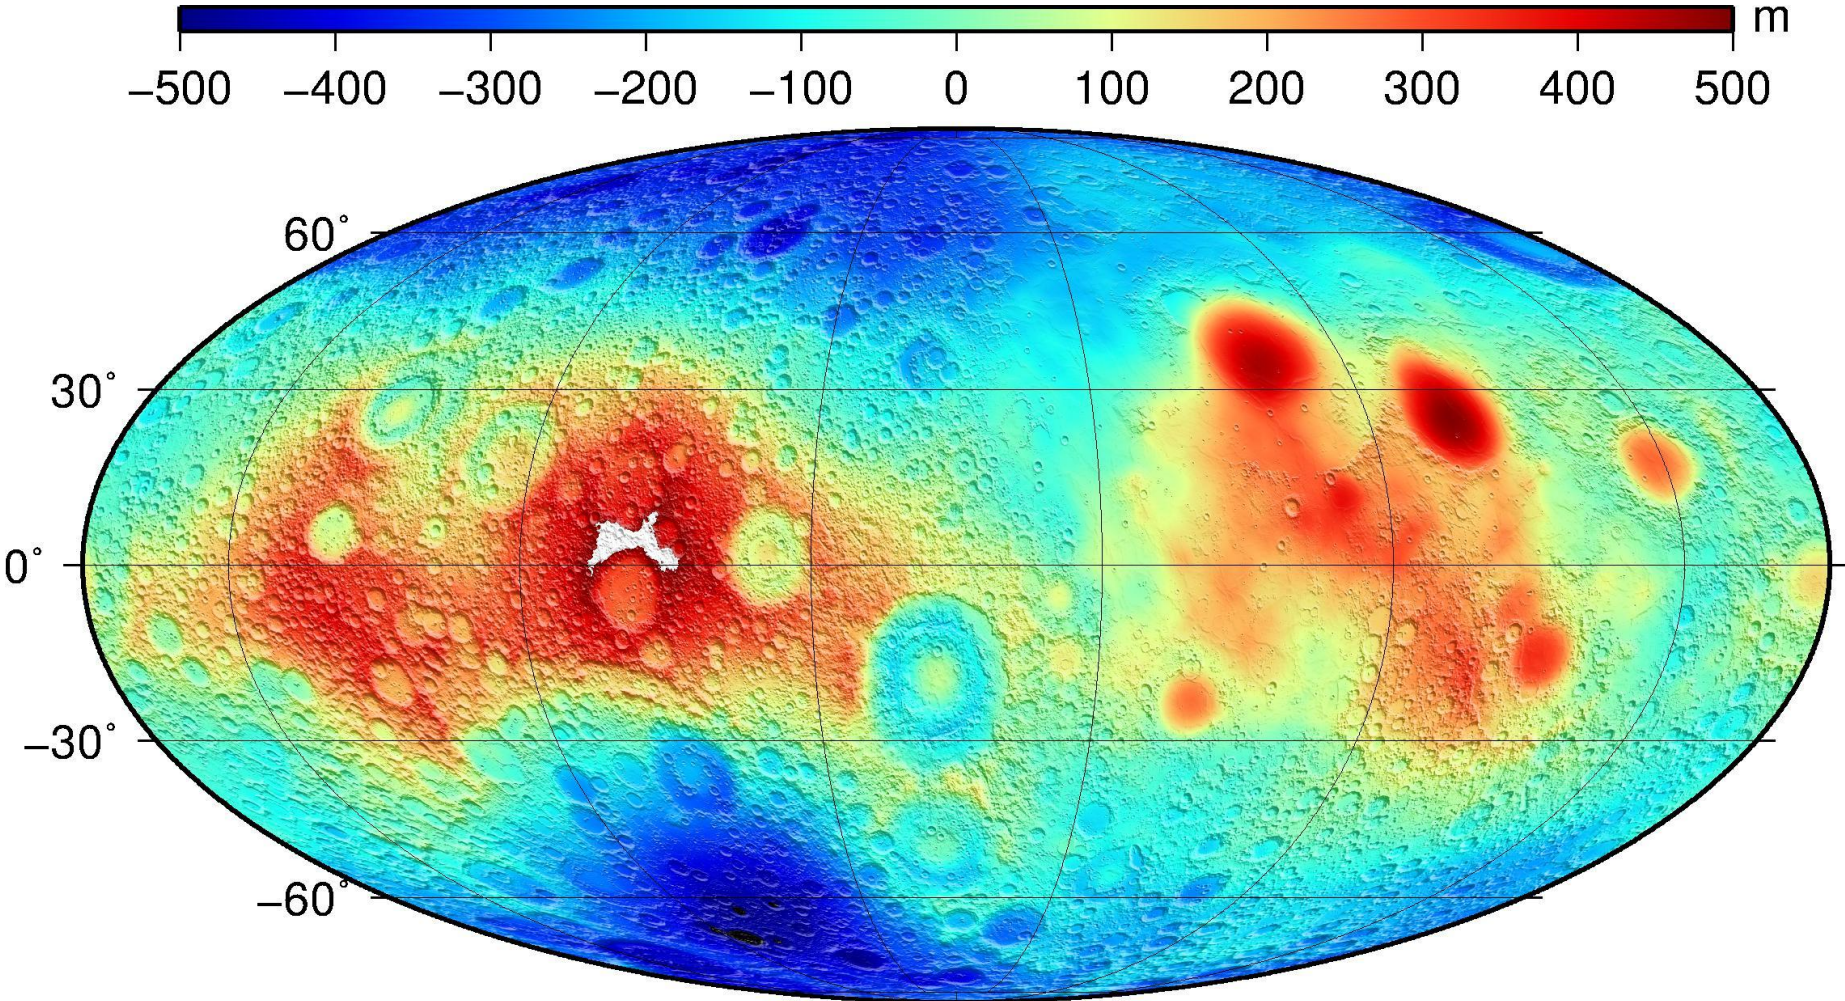

The magnetosphere and radiation belts

- The Earth is surrounded by radiation belts of energetic particles trapped inside the magnetosphere
 - The magnetic field of the Earth is roughly a magnetic dipole
 - Magnetic L shells defined by $R \approx L \cos^2\lambda$
 - Inner belt populated by high energy protons and electrons
 - Outer belts populated only by high energy electrons
- The origin of these energetic particles is the [Sun](#)
- Its particle density and spectrum are highly dependent on the Solar Cycle
- Also contributions by cosmic rays (rarer, but with very hard energetic spectrum)



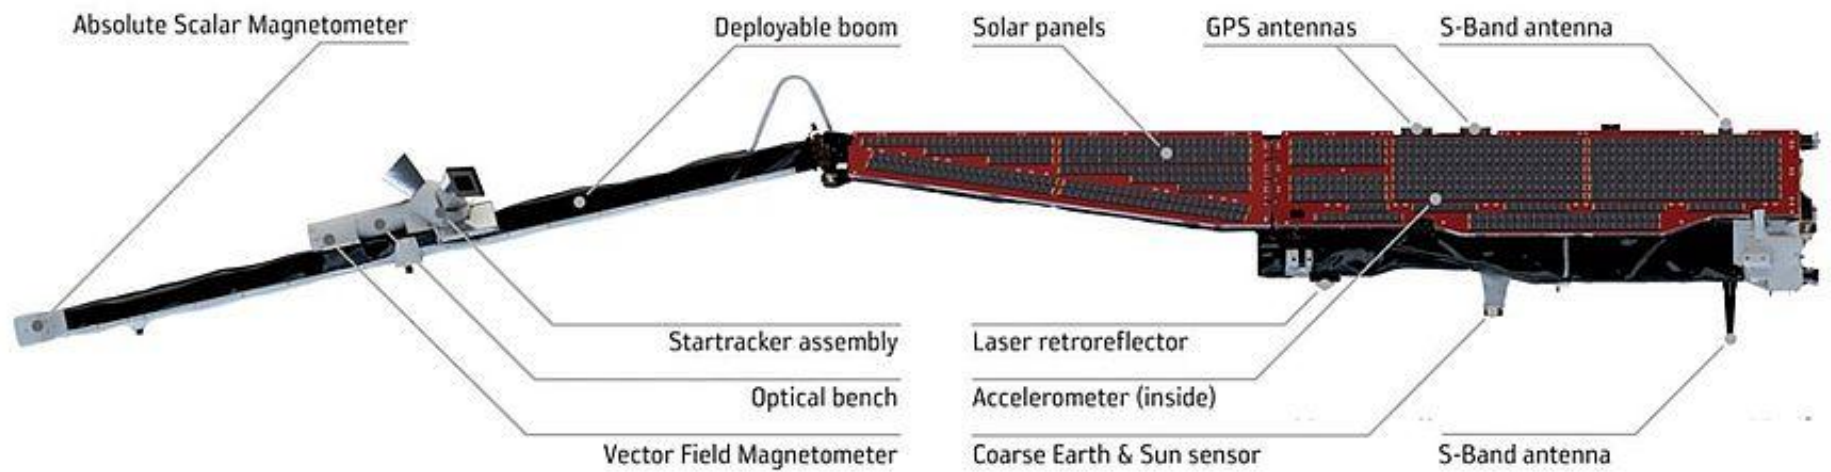




IGRF12

- The international Geomagnetic Reference Field: 12th generation, is one of the most widely used models for the magnetic field of the Earth.
- This model has thousands of adjustable parameters.
- Its expression reads


$$V(r, \theta, \phi, t) = R_{\oplus} \sum_{n=1}^N \sum_{m=0}^n \left(\frac{R_{\oplus}}{r} \right)^{n+1} \left[g_n^m(t) \cos(m\phi) + h_n^m(t) \sin(m\phi) P_{n,m}(\cos \theta) \right]$$

Total Force IGRF12

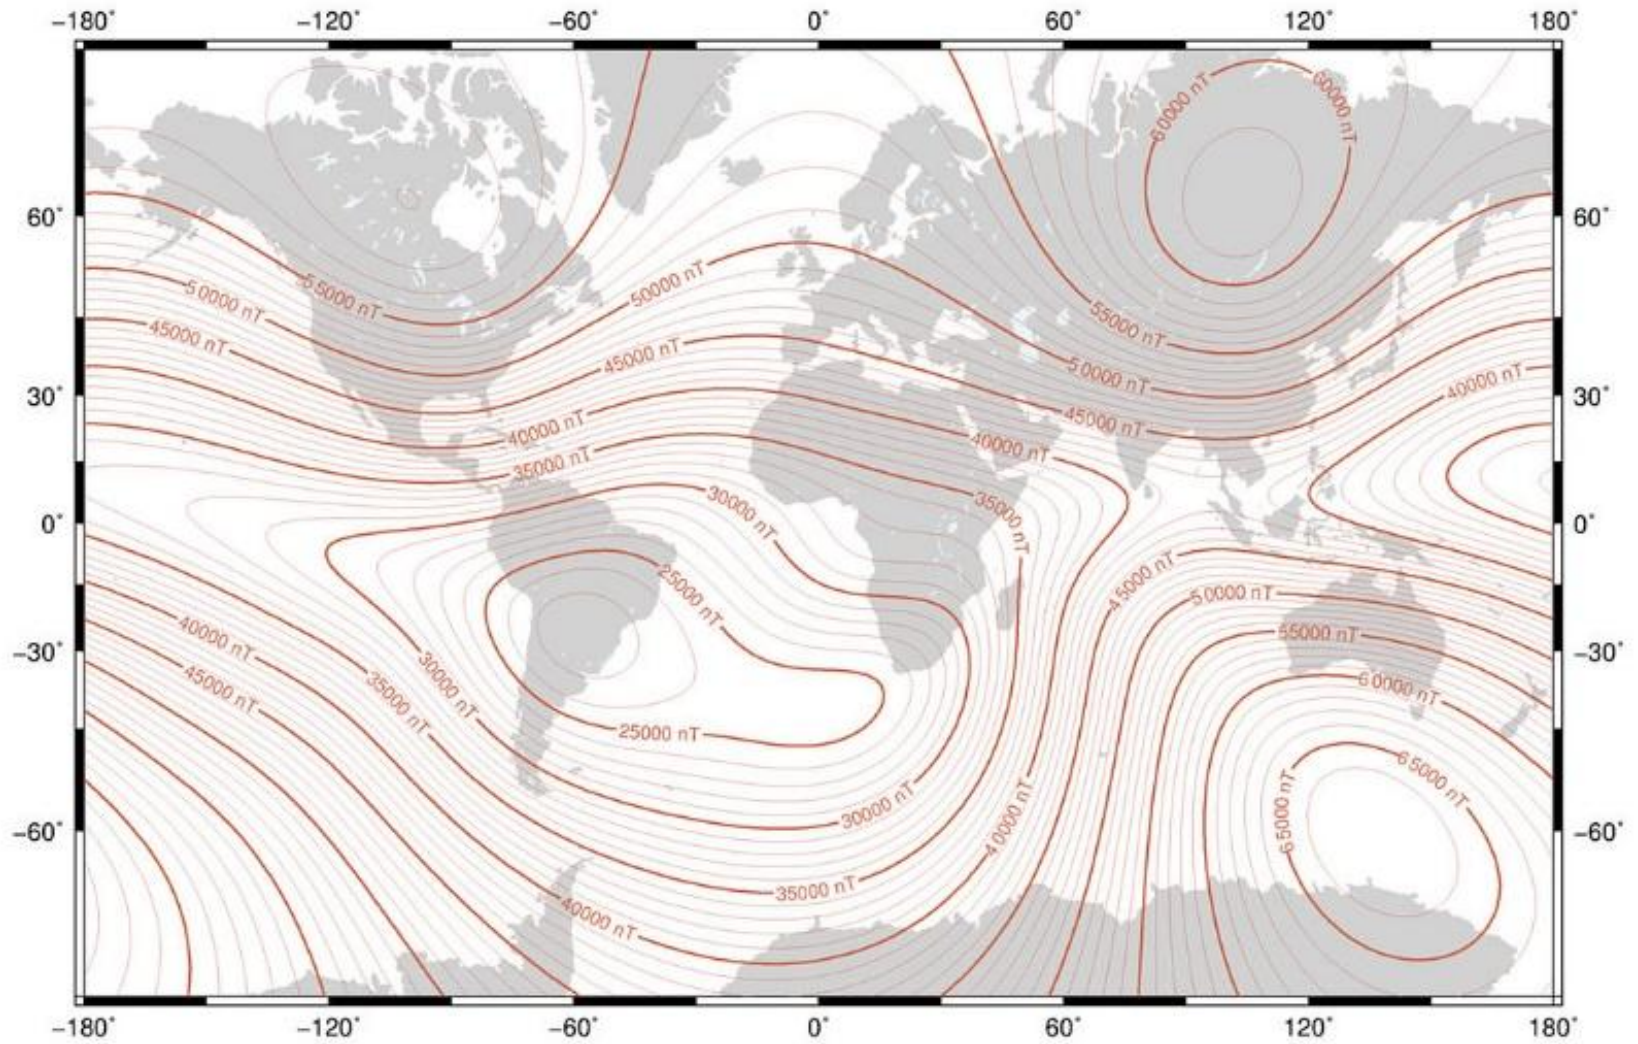

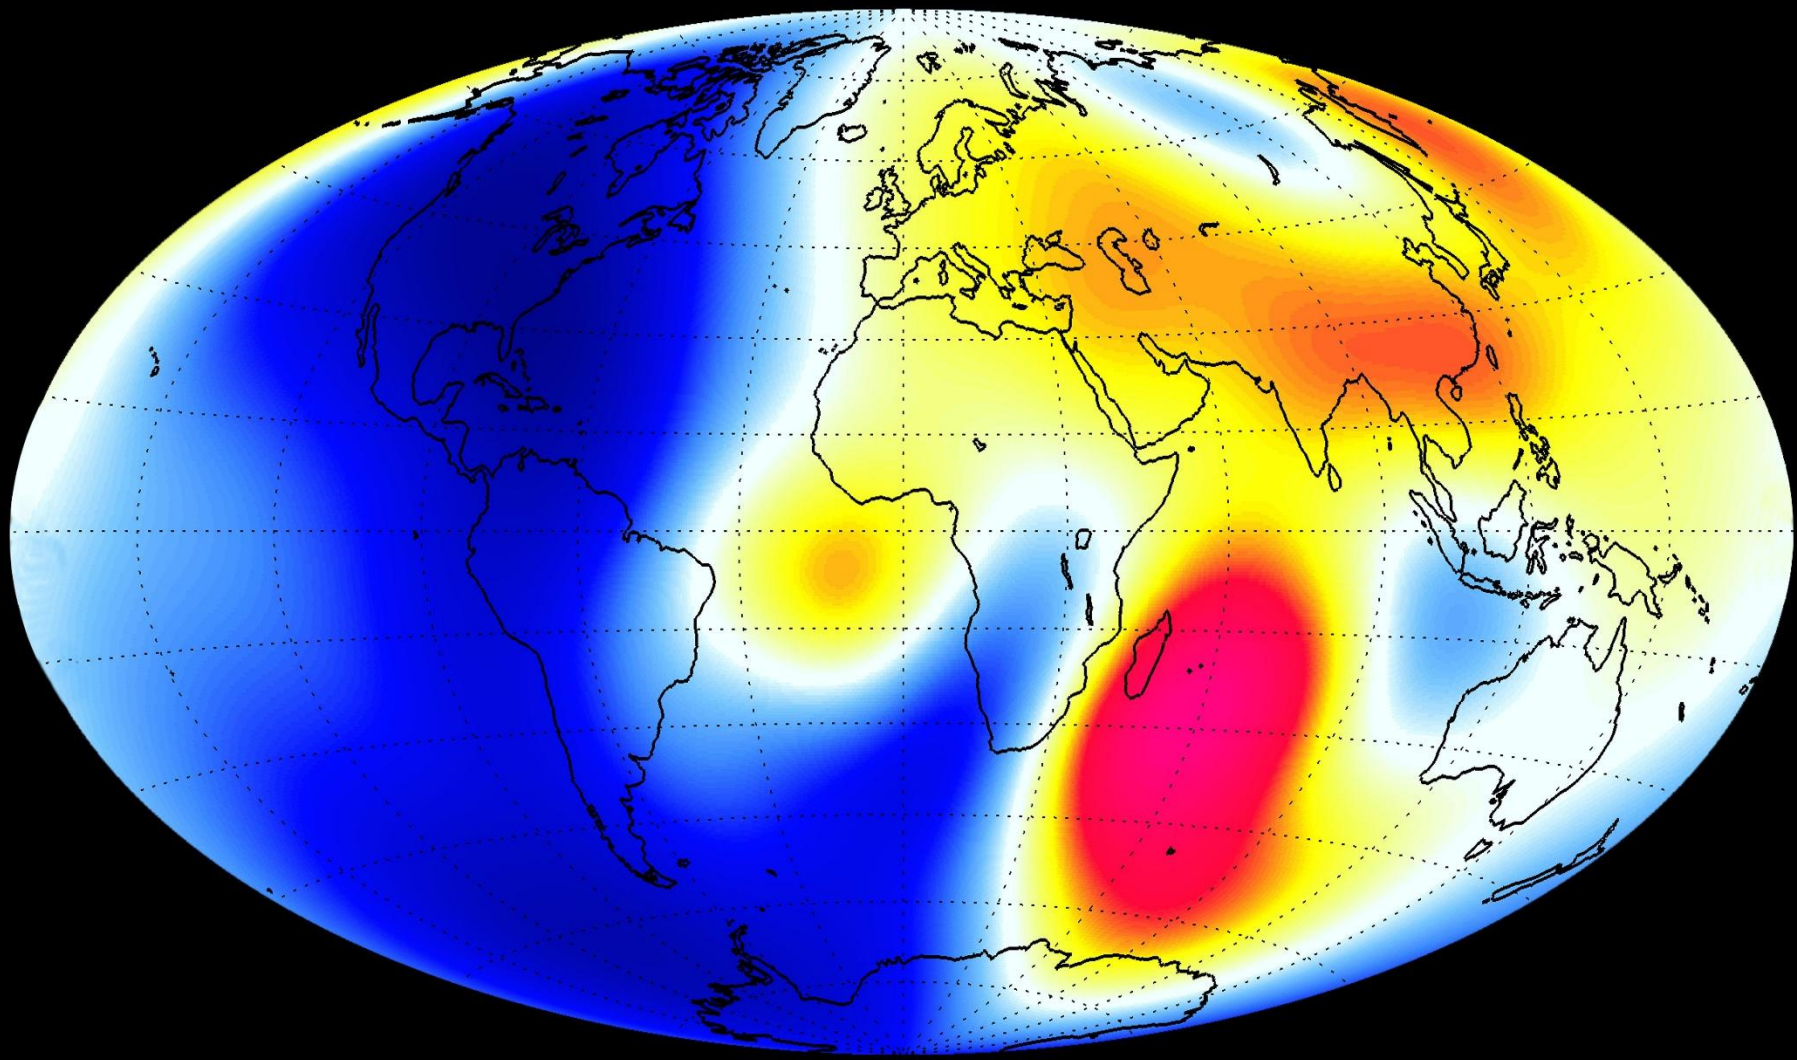


Earth's Internal Structure

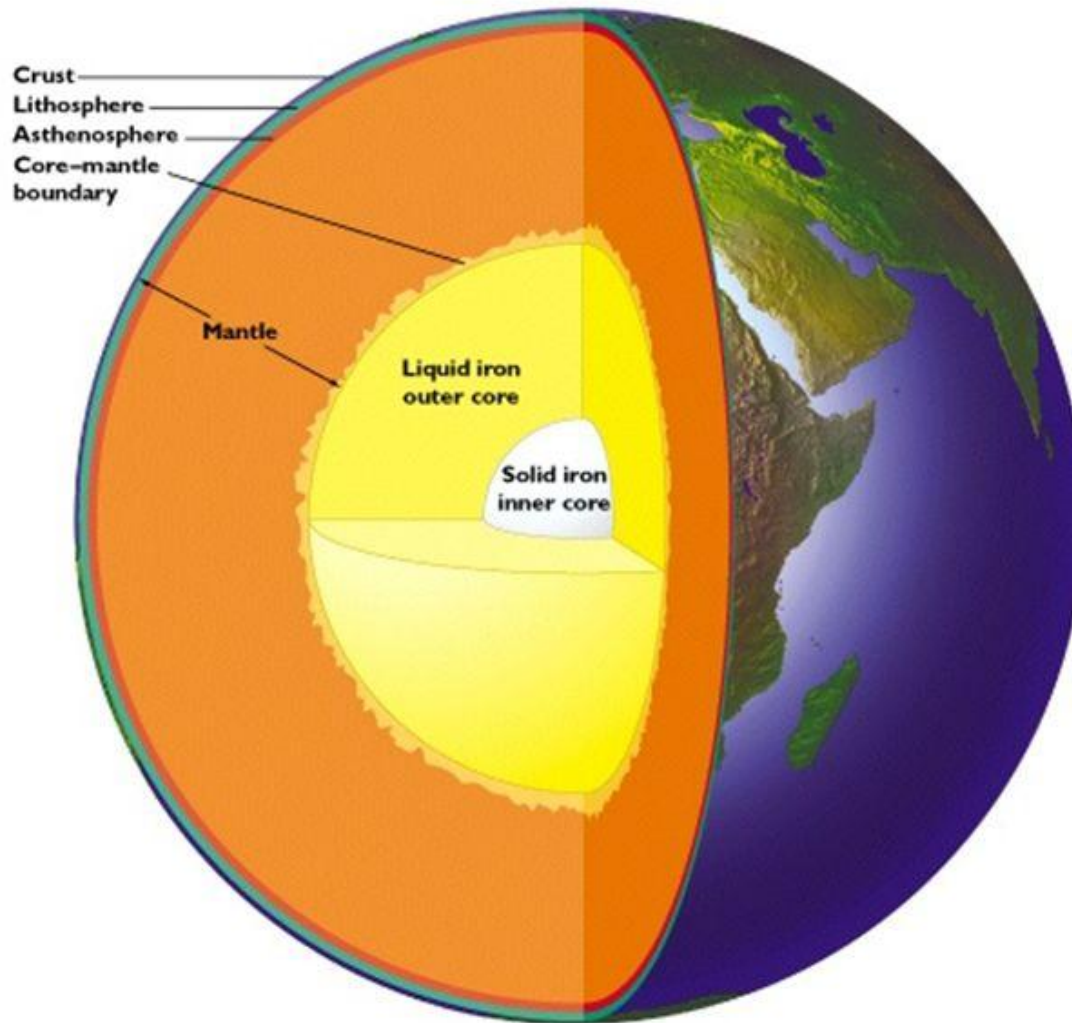

- crust
- mantle
- core

Mercury

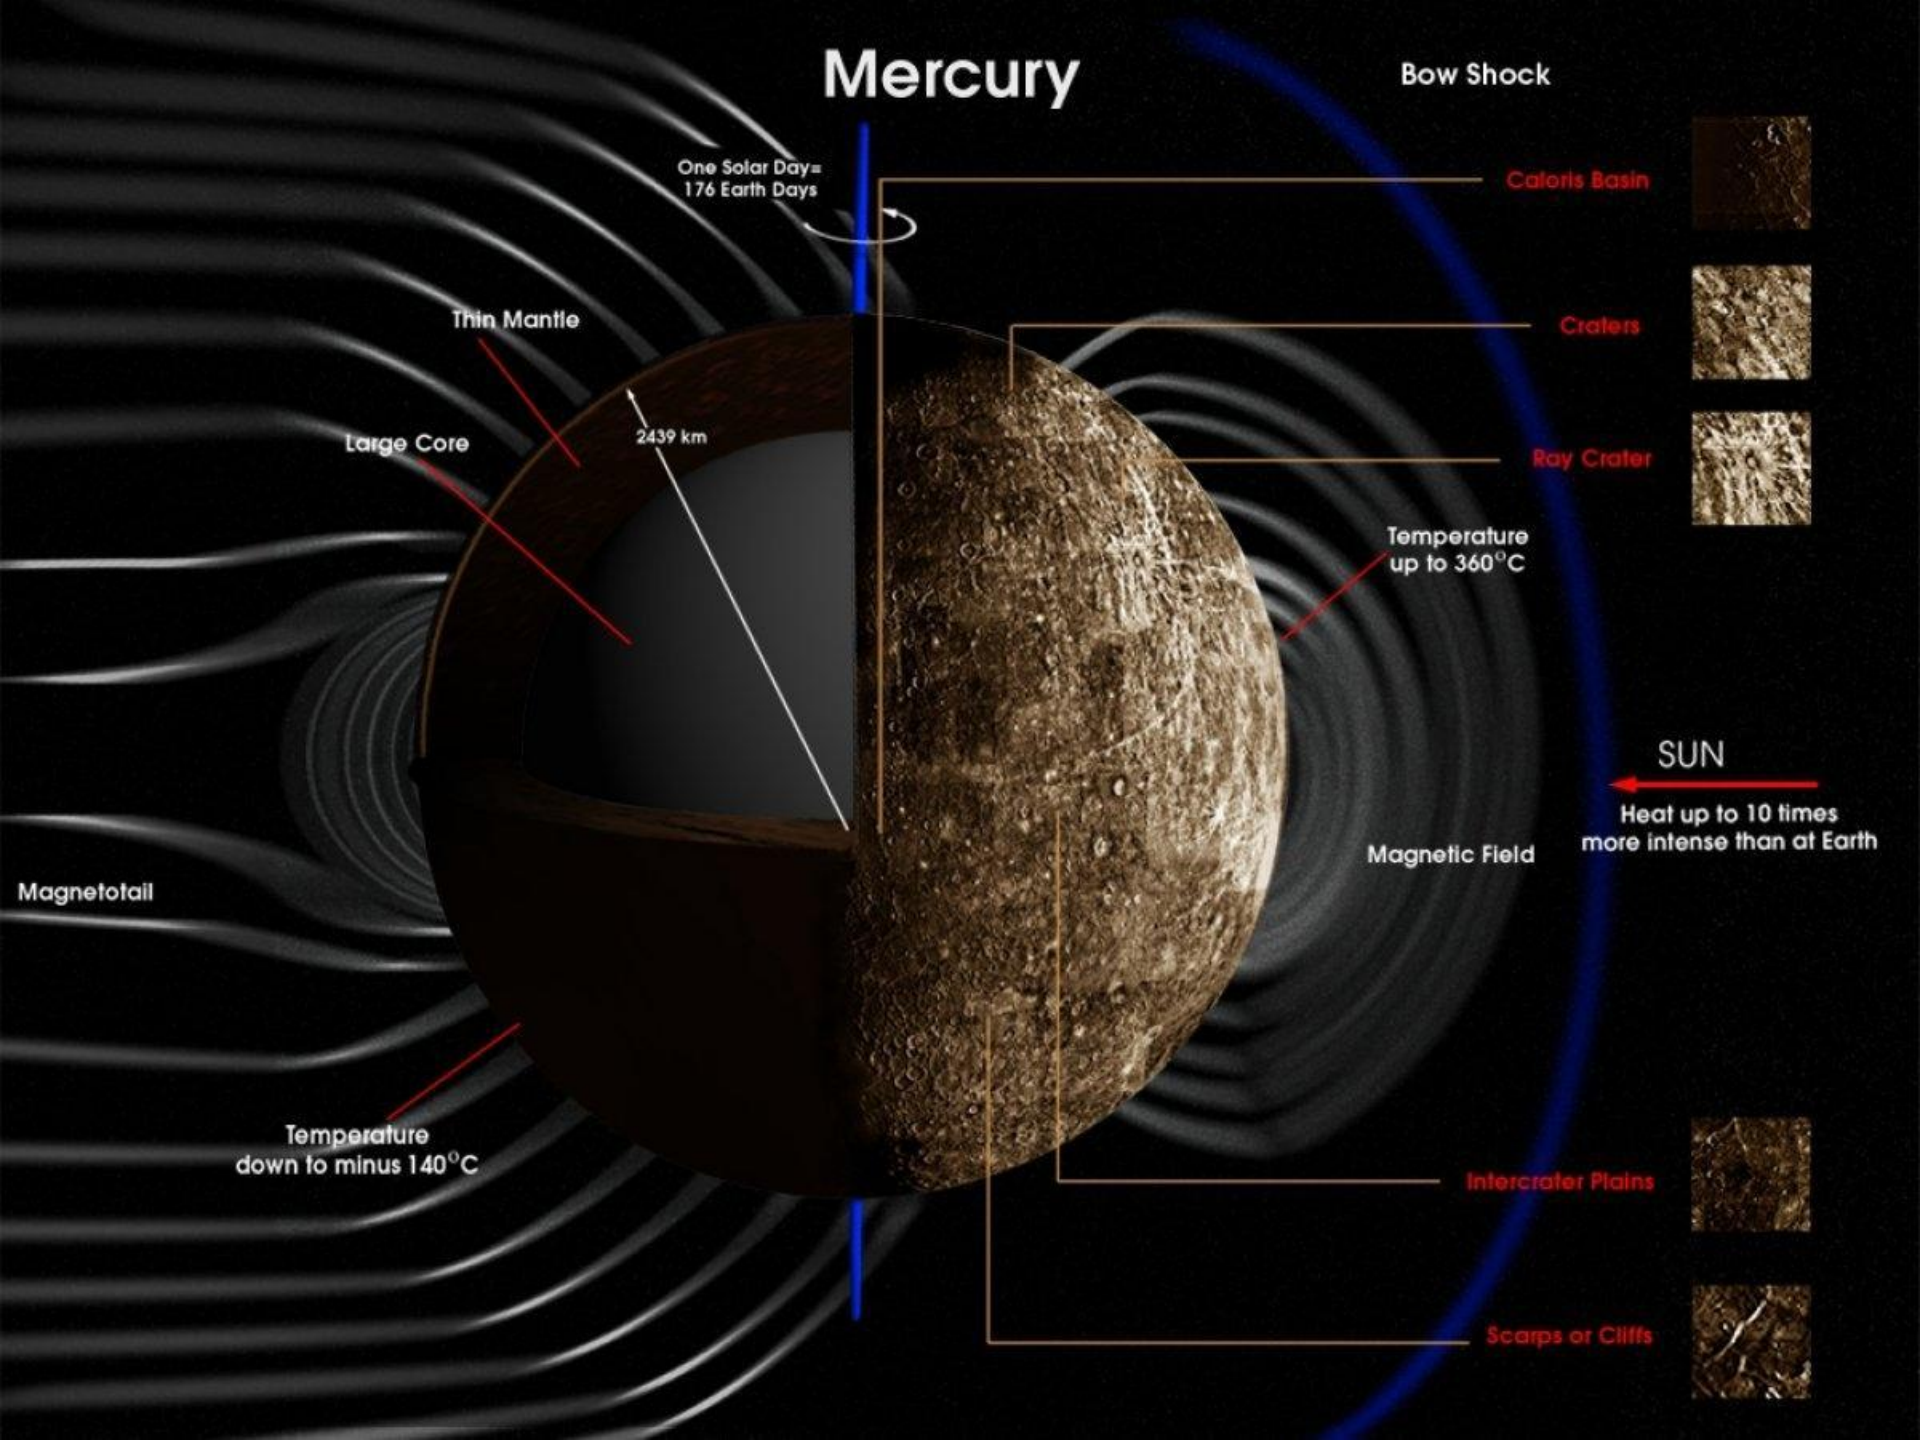

One Solar Day =
176 Earth Days

Bow Shock

Caloris Basin



Thin Mantle

Craters



Large Core

2439 km

Ray Crater



Temperature
up to 360°C

SUN

Heat up to 10 times
more intense than at Earth

Magnetic Field

Temperature
down to minus 140°C


Intercrater Plains





Scarps or Cliffs




Magnetotail

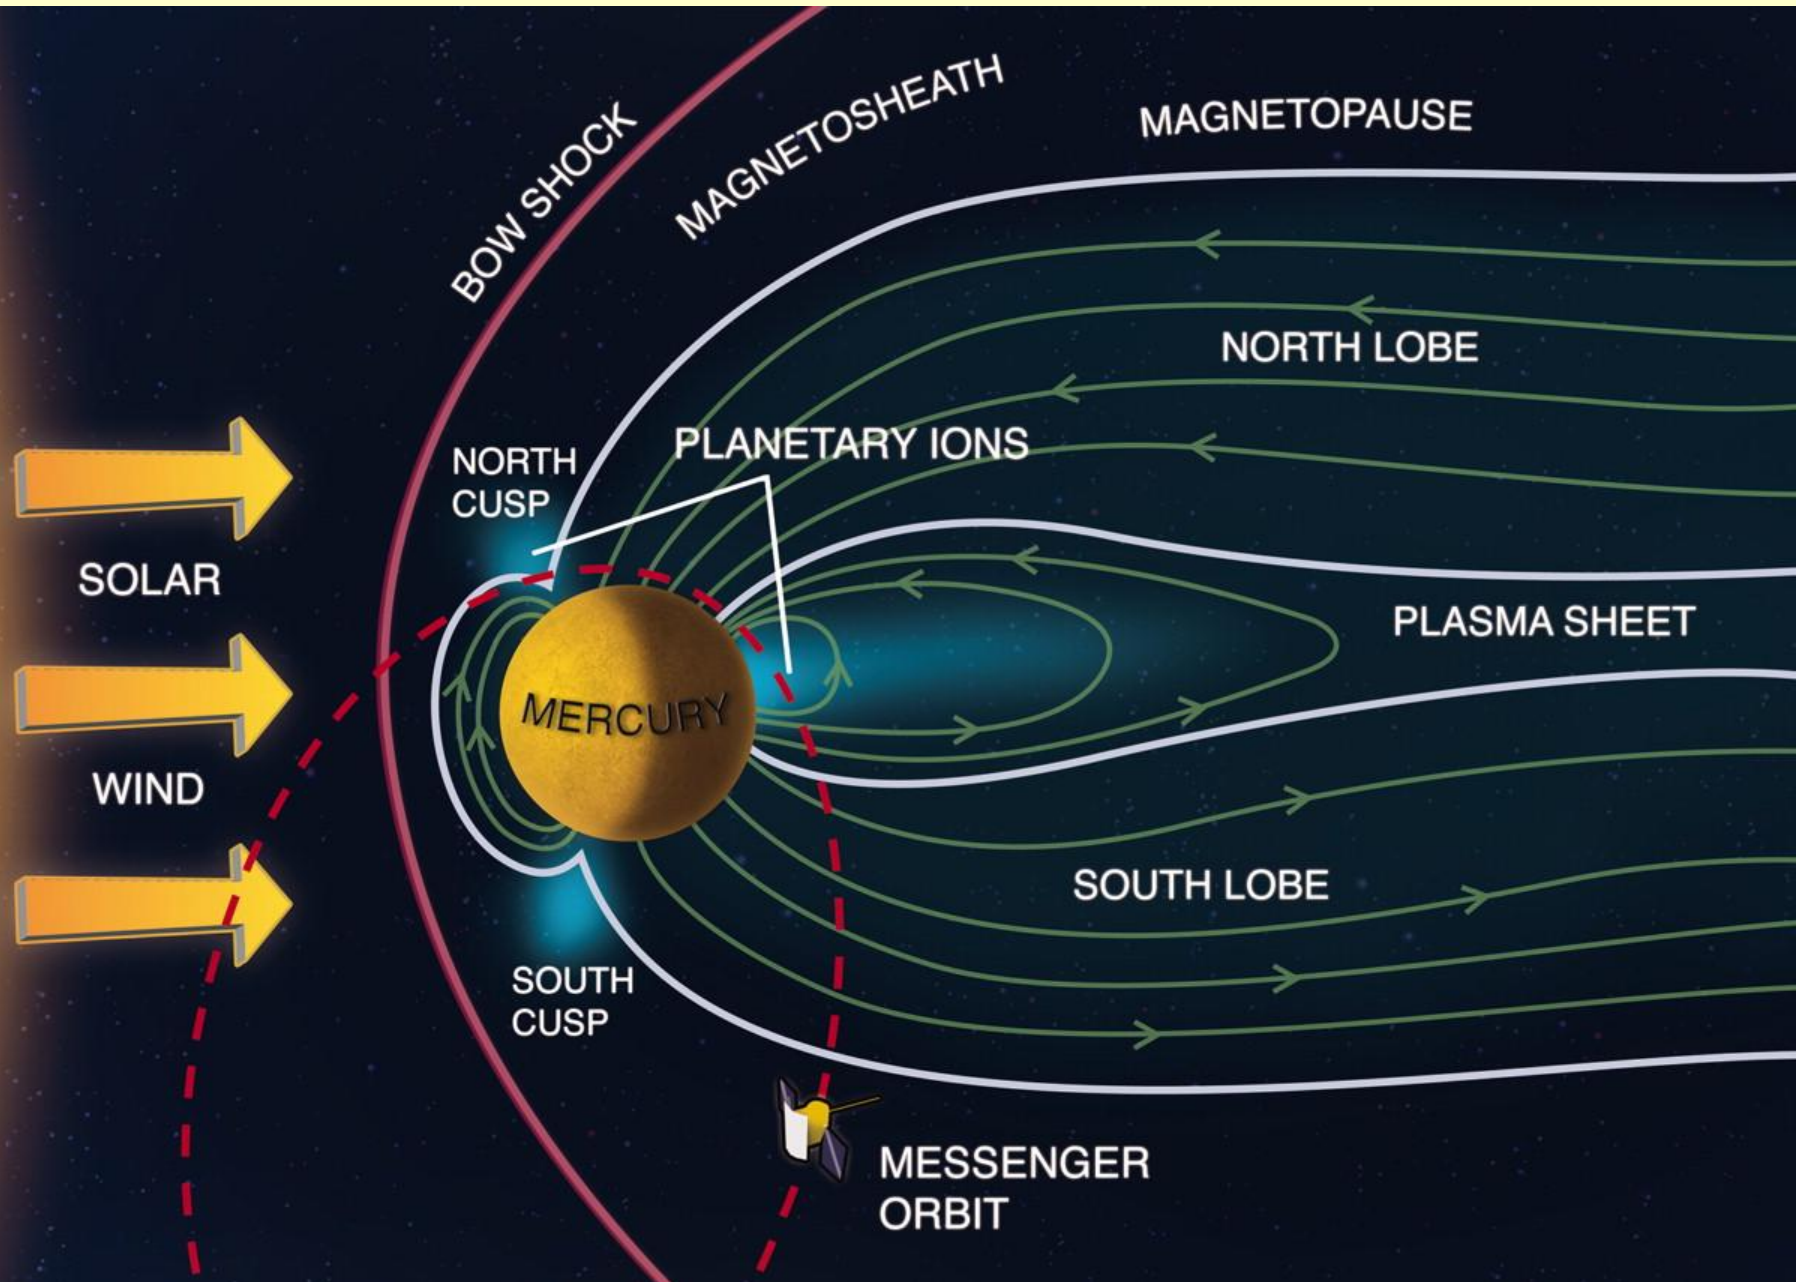




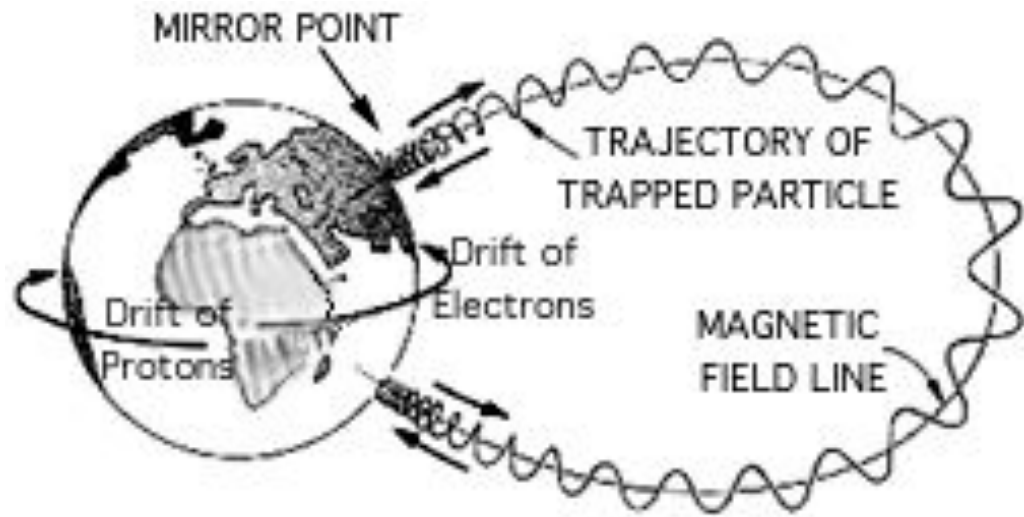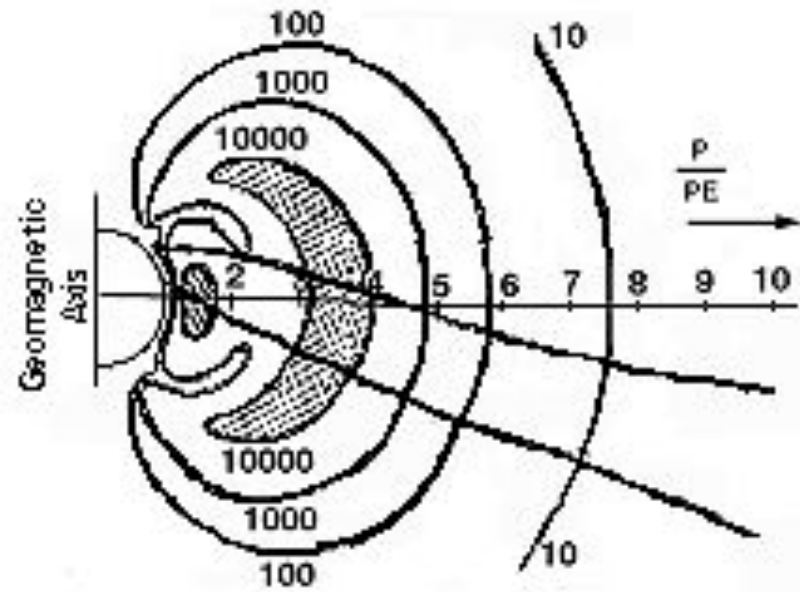

Geometry and physical explanation of trapped radiation belts

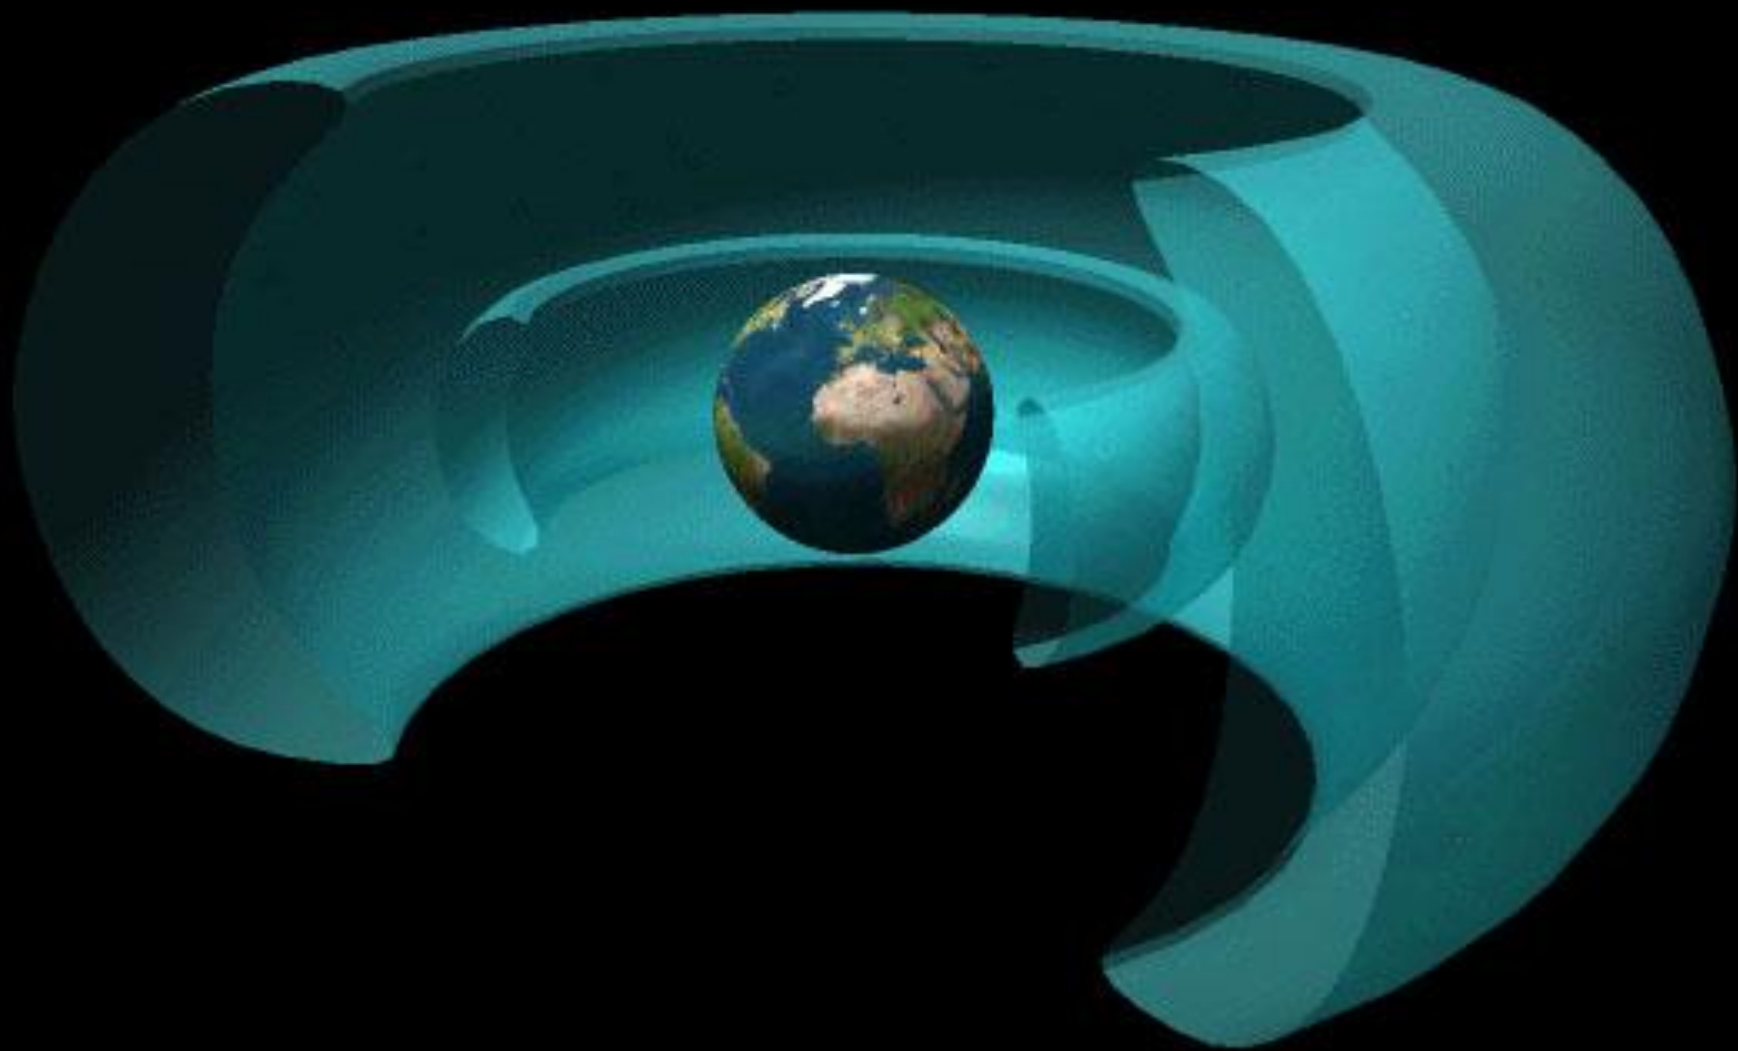

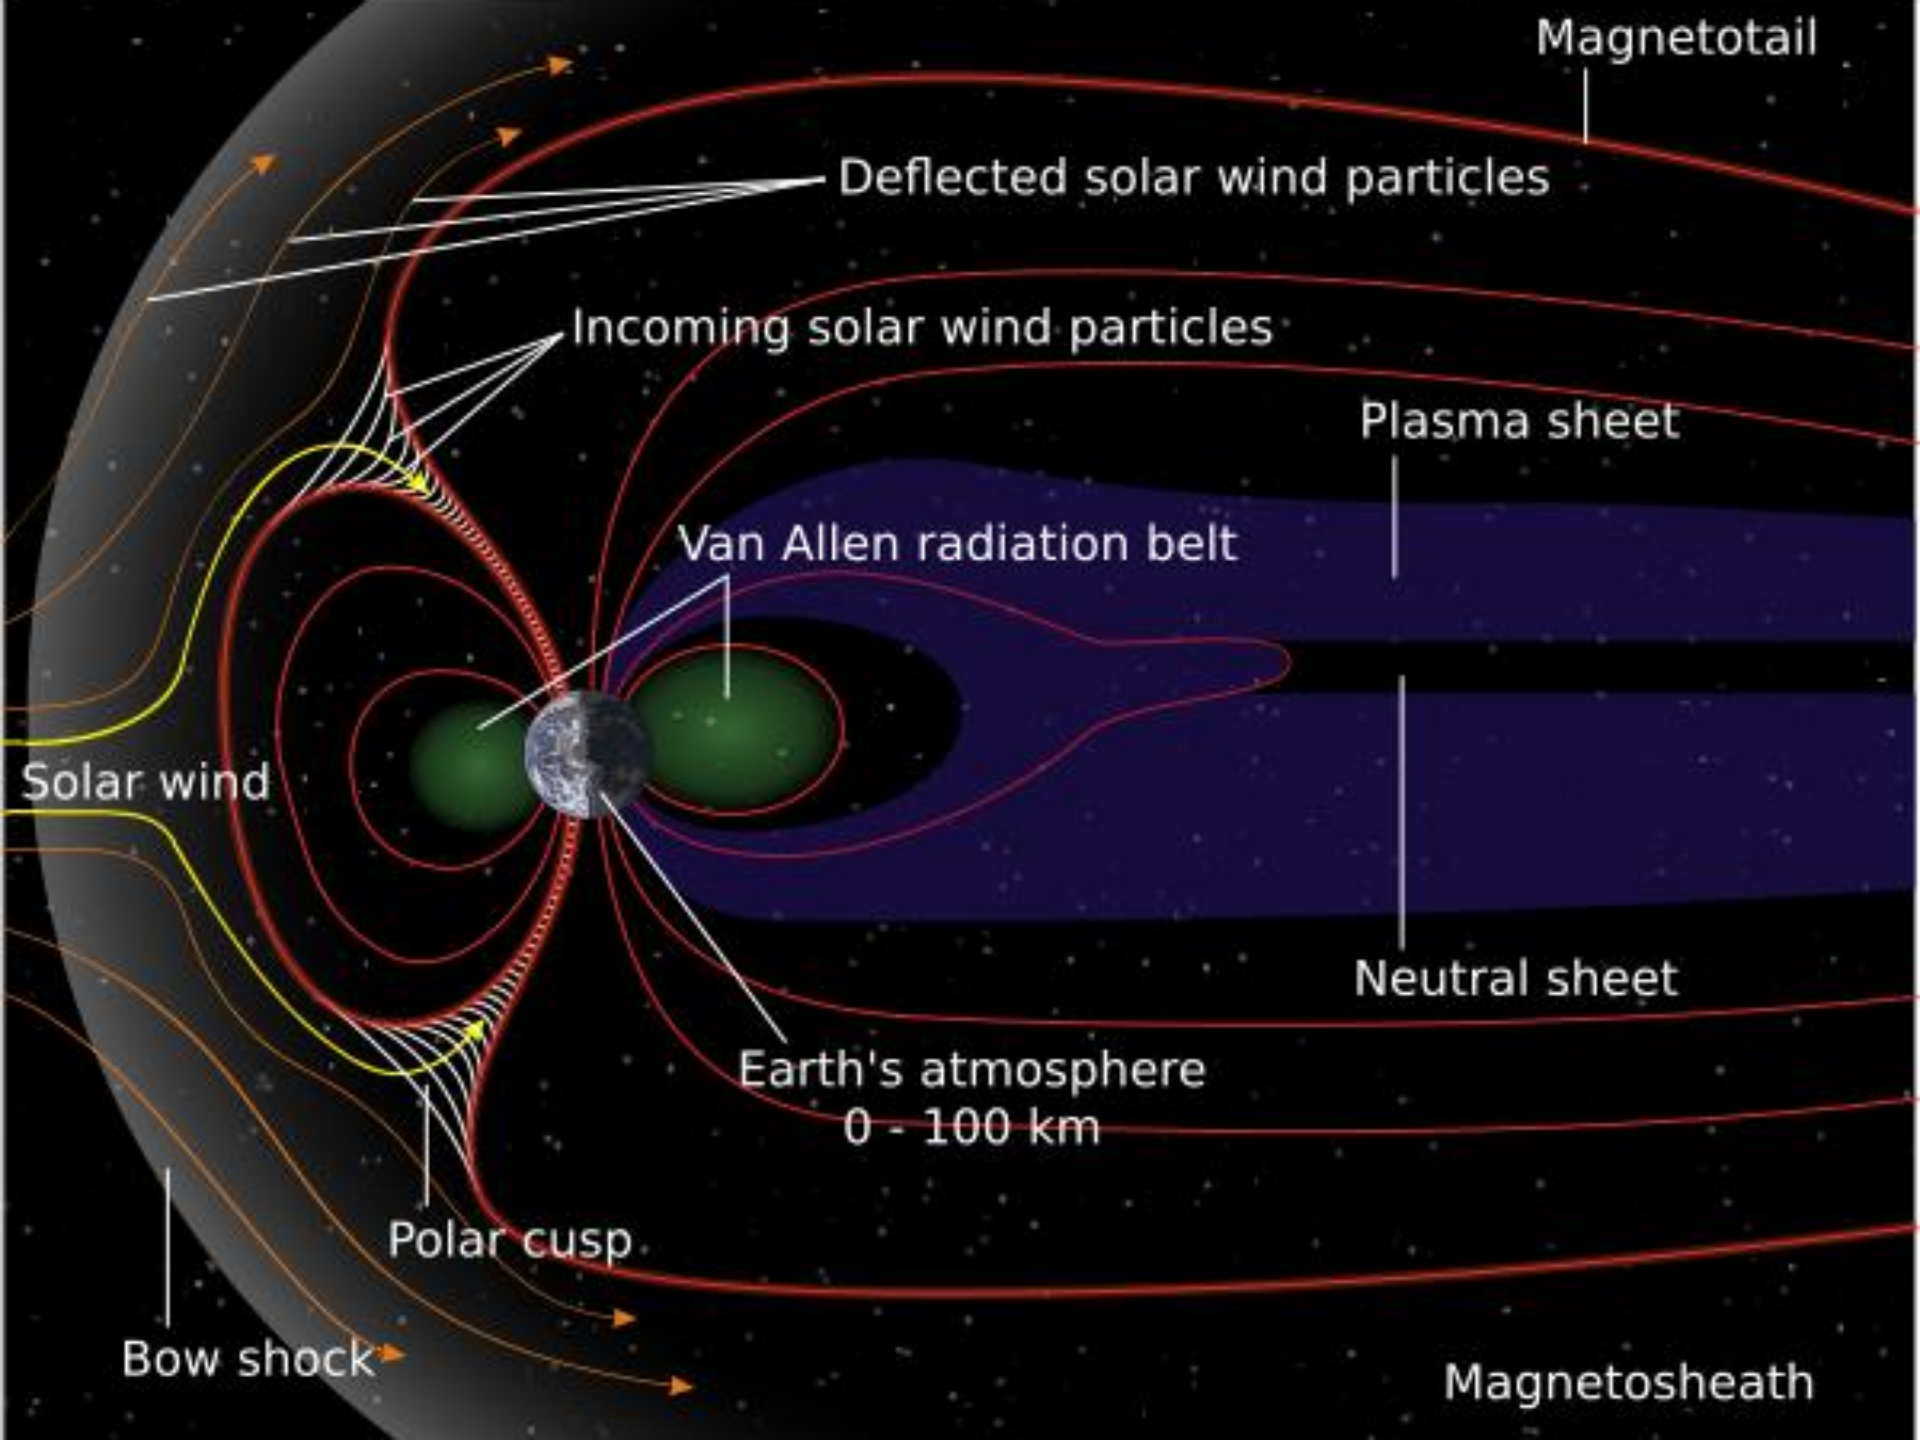

Models for radiation belts


- Proton models:
 - Solar minimum: AP8MIN
 - Solar Maximum: AP8MAX
- Electron models
 - Solar minimum: AE8MIN
 - Solar maximum: AE8MAX


http://nssdcftp.gsfc.nasa.gov/models/radiation_belt/radbelt/


<http://www.spennis.oma.be> (requires free registration)

The third van Allen belt

- Recently, the van Allen probes have discovered a third (transient) van Allen belt

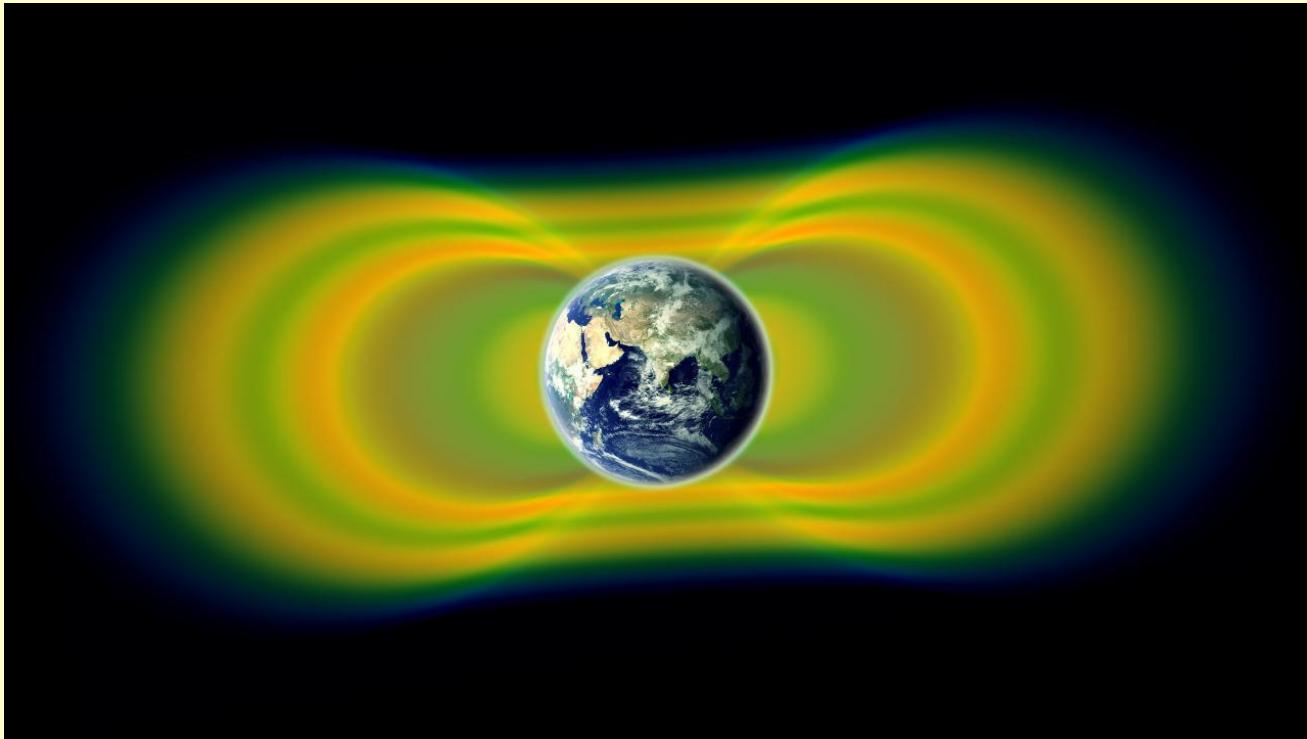

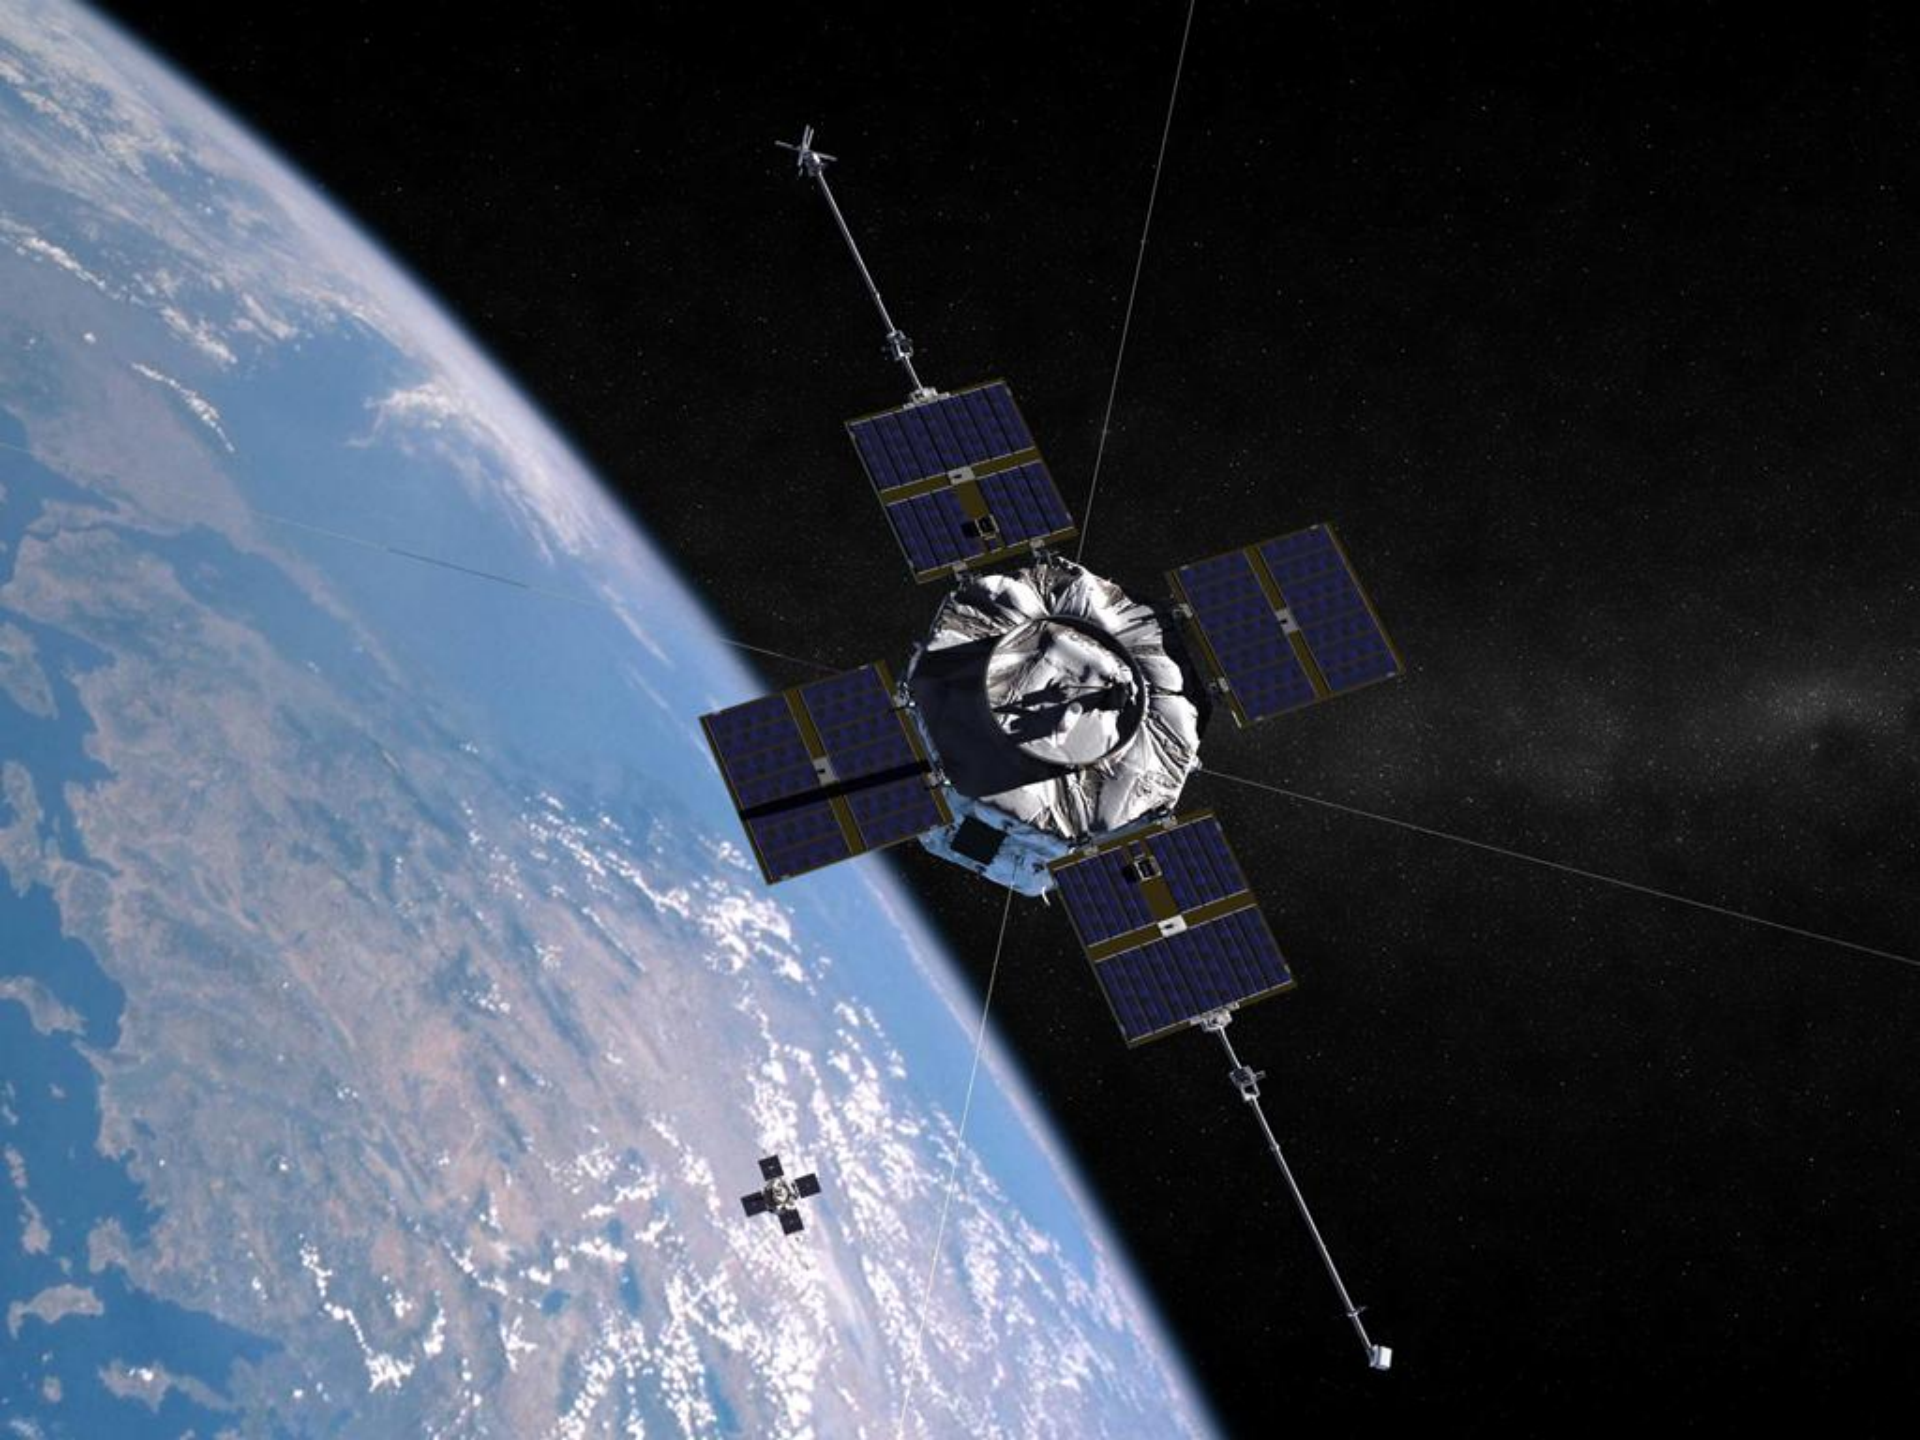


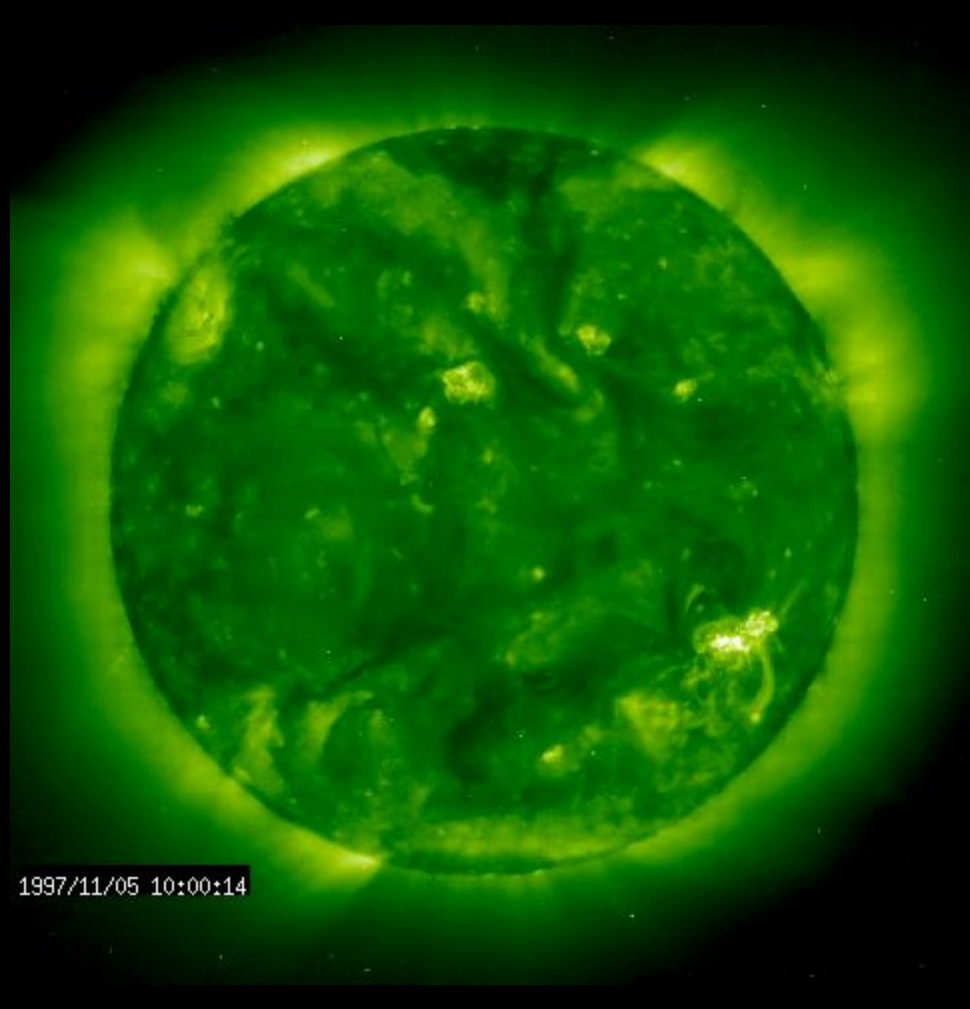

1997/11/05 10:00:14

The South Atlantic Anomaly



- The South Atlantic Anomaly is due to a lack of homogeneity in the proton belt
 - The magnetic field of the Earth is off-center (by about 500 km)
 - The magnetic axis is tilted 11 deg with respect to the rotation axis of the Earth

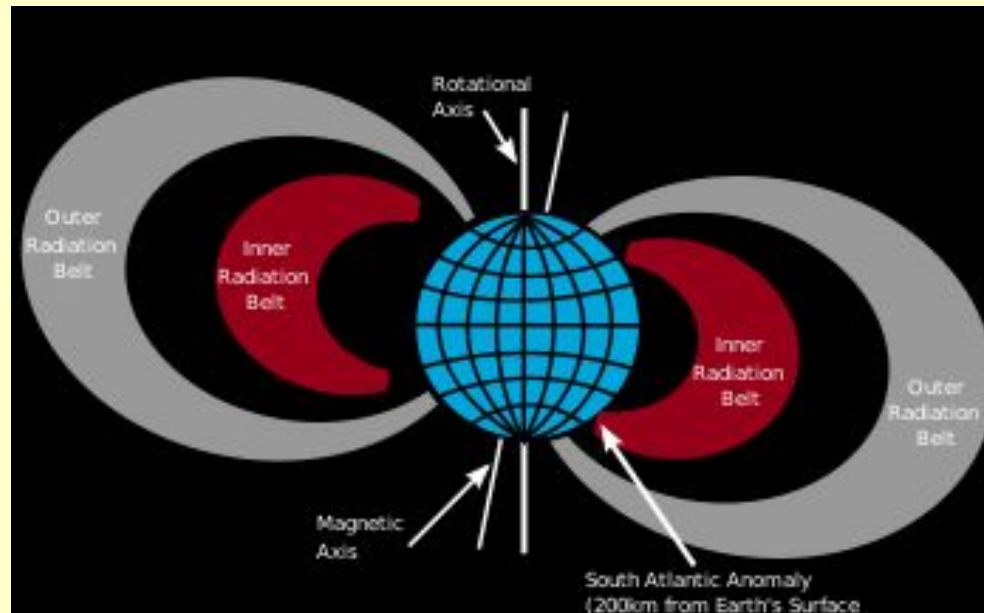

Radiation Effects

- There are several kinds of SEEs
 - Single event upsets (SEU): a change of a bit (or more) in a memory or register produced by the action of an impacting ion. They do not harm the device, but degrade its operation
 - Single event latchup (SEL): a PNPN device becomes shorted until it is power-cycled. The part may fail if the anomalous current is going on for a sufficiently long time
 - Single event transient (SET): the charge produced in an ionization event is collected and travels along the circuit
 - Single event burnout (SEB): the ionization and anomalous currents are intense enough to cause a permanent damage

UoSAT-3 COSMIC RAY EFFECTS AND DOSIMETRY EXPERIMENT
30 days : 1/ 6/91 - 30/ 6/91
Channel 1. LET Range : 32.2 - 62.4 MeV/(g/cm²)

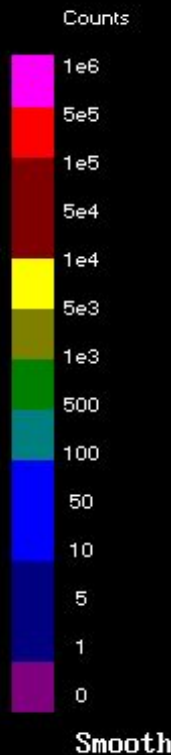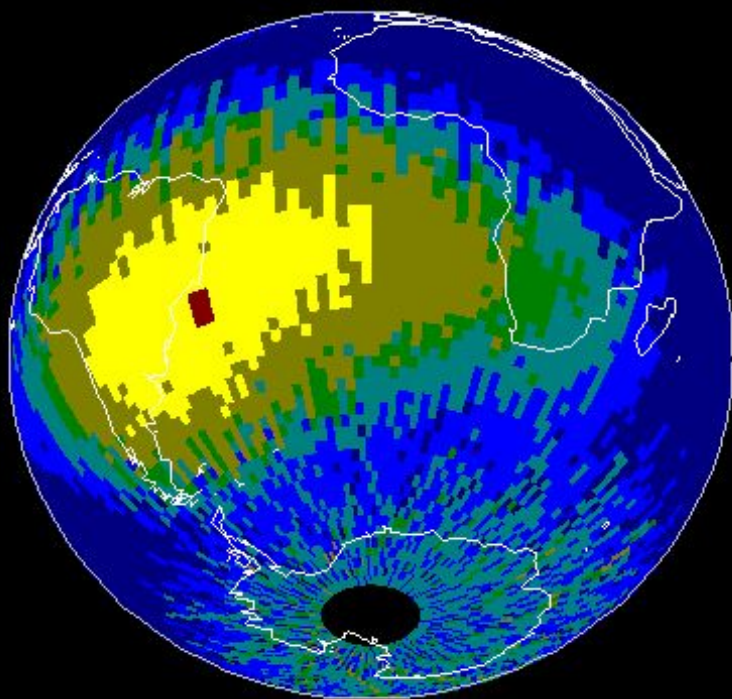


Images of the South Atlantic Anomaly

Lat:-40, Lon: -10

300 second Integration Time


UNIVERSITY OF SURREY - DEFENCE RESEARCH AGENCY - AEA TECHNOLOGY

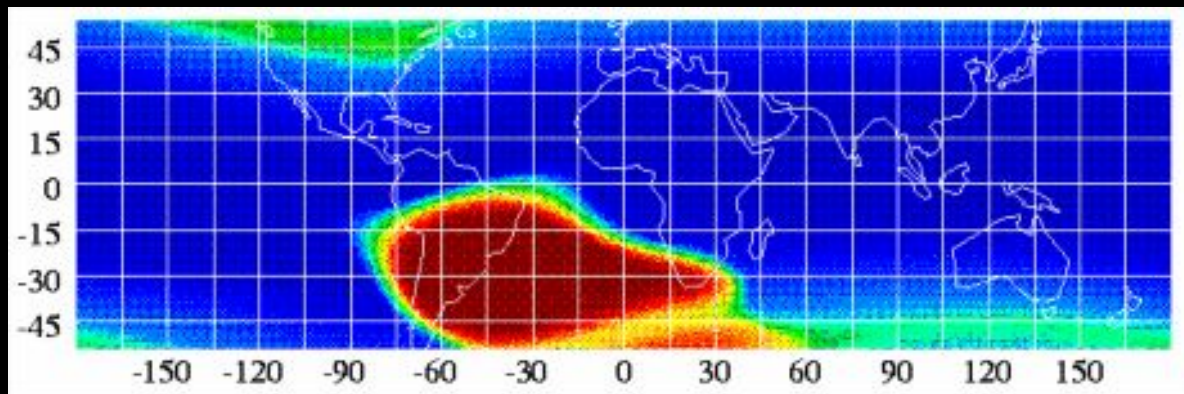

The effects of SAA

- The South Atlantic Anomaly is due to a lack of homogeneity in the proton belt
 - The magnetic field of the Earth is off-center
 - The magnetic axis is tilted with respect to the rotation axis of the Earth
- The SAA is specially relevant for satellites in low orbit with inclination between 35° and 60°
- No way to avoid the SAA
- Increased number of p have important effect of radiation doses

UOSAT-2 Memory Upsets

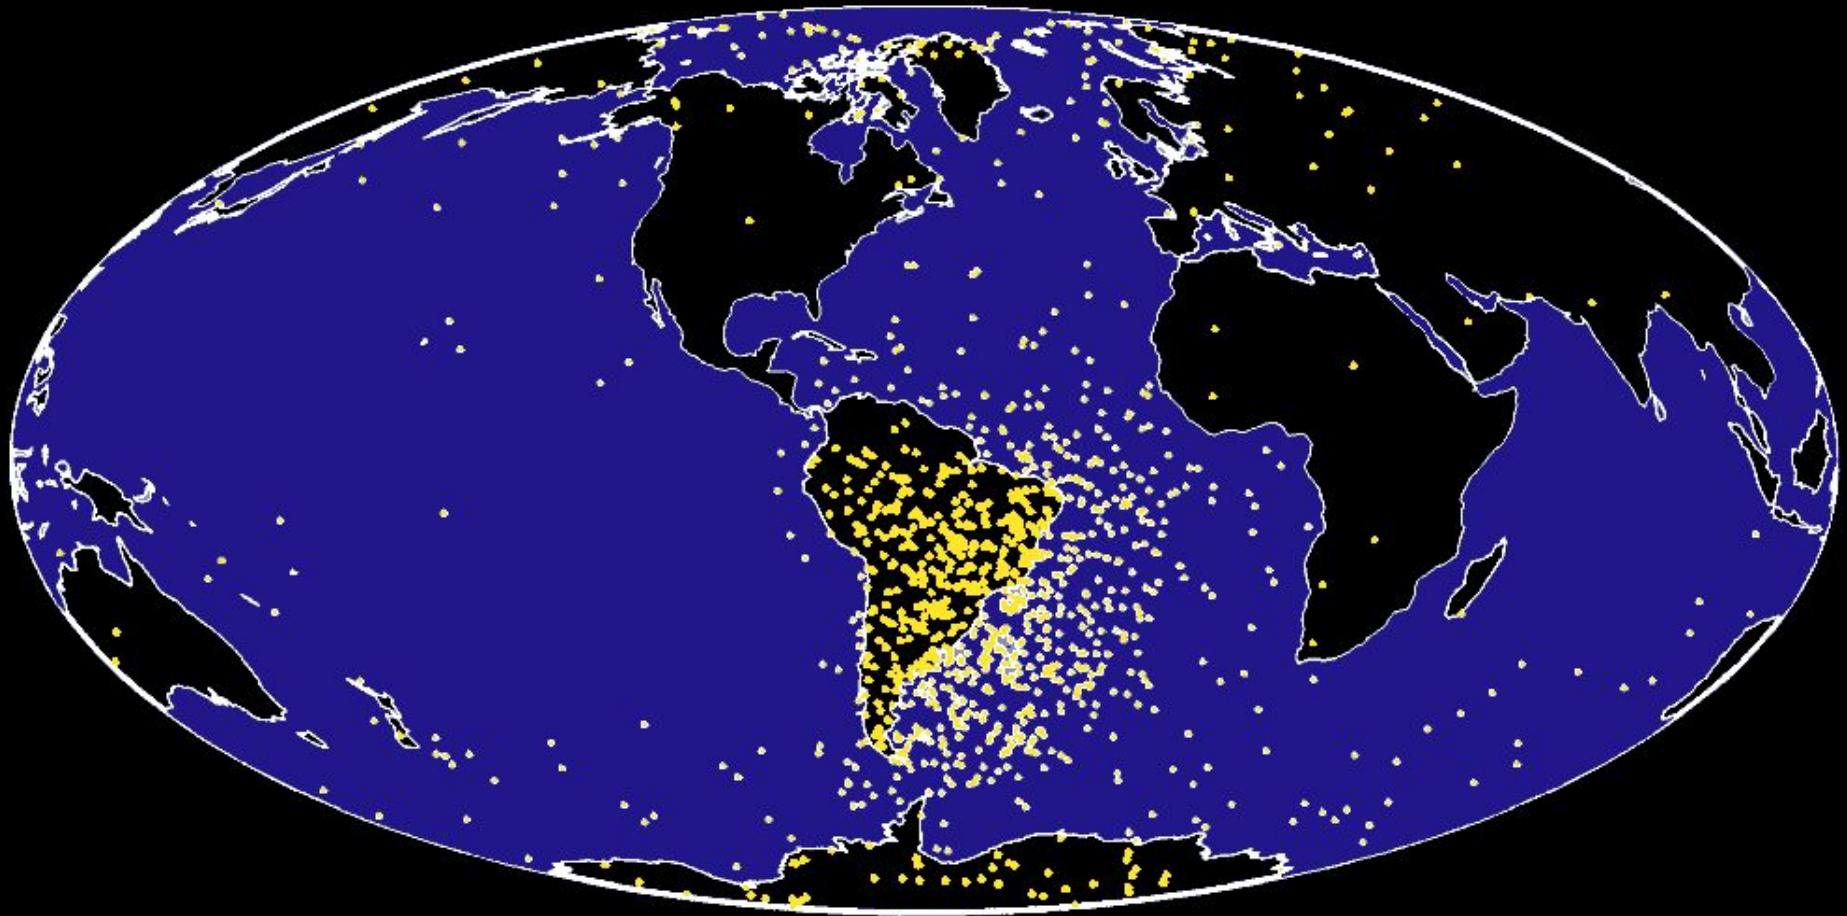


ESA/ESTEC The Netherlands

NOAA/NGDC Boulder


The Solar Cycle

- The Sun experiences substantial changes in its activity with a period of ~ 11.2 years:
 - Increased number of sunspots
 - Increased number of energetic particle ejection
 - Increase in the mean energy of particles
- The activity is measured through the radiation intensity measured at a wavelength of 10.7 cm



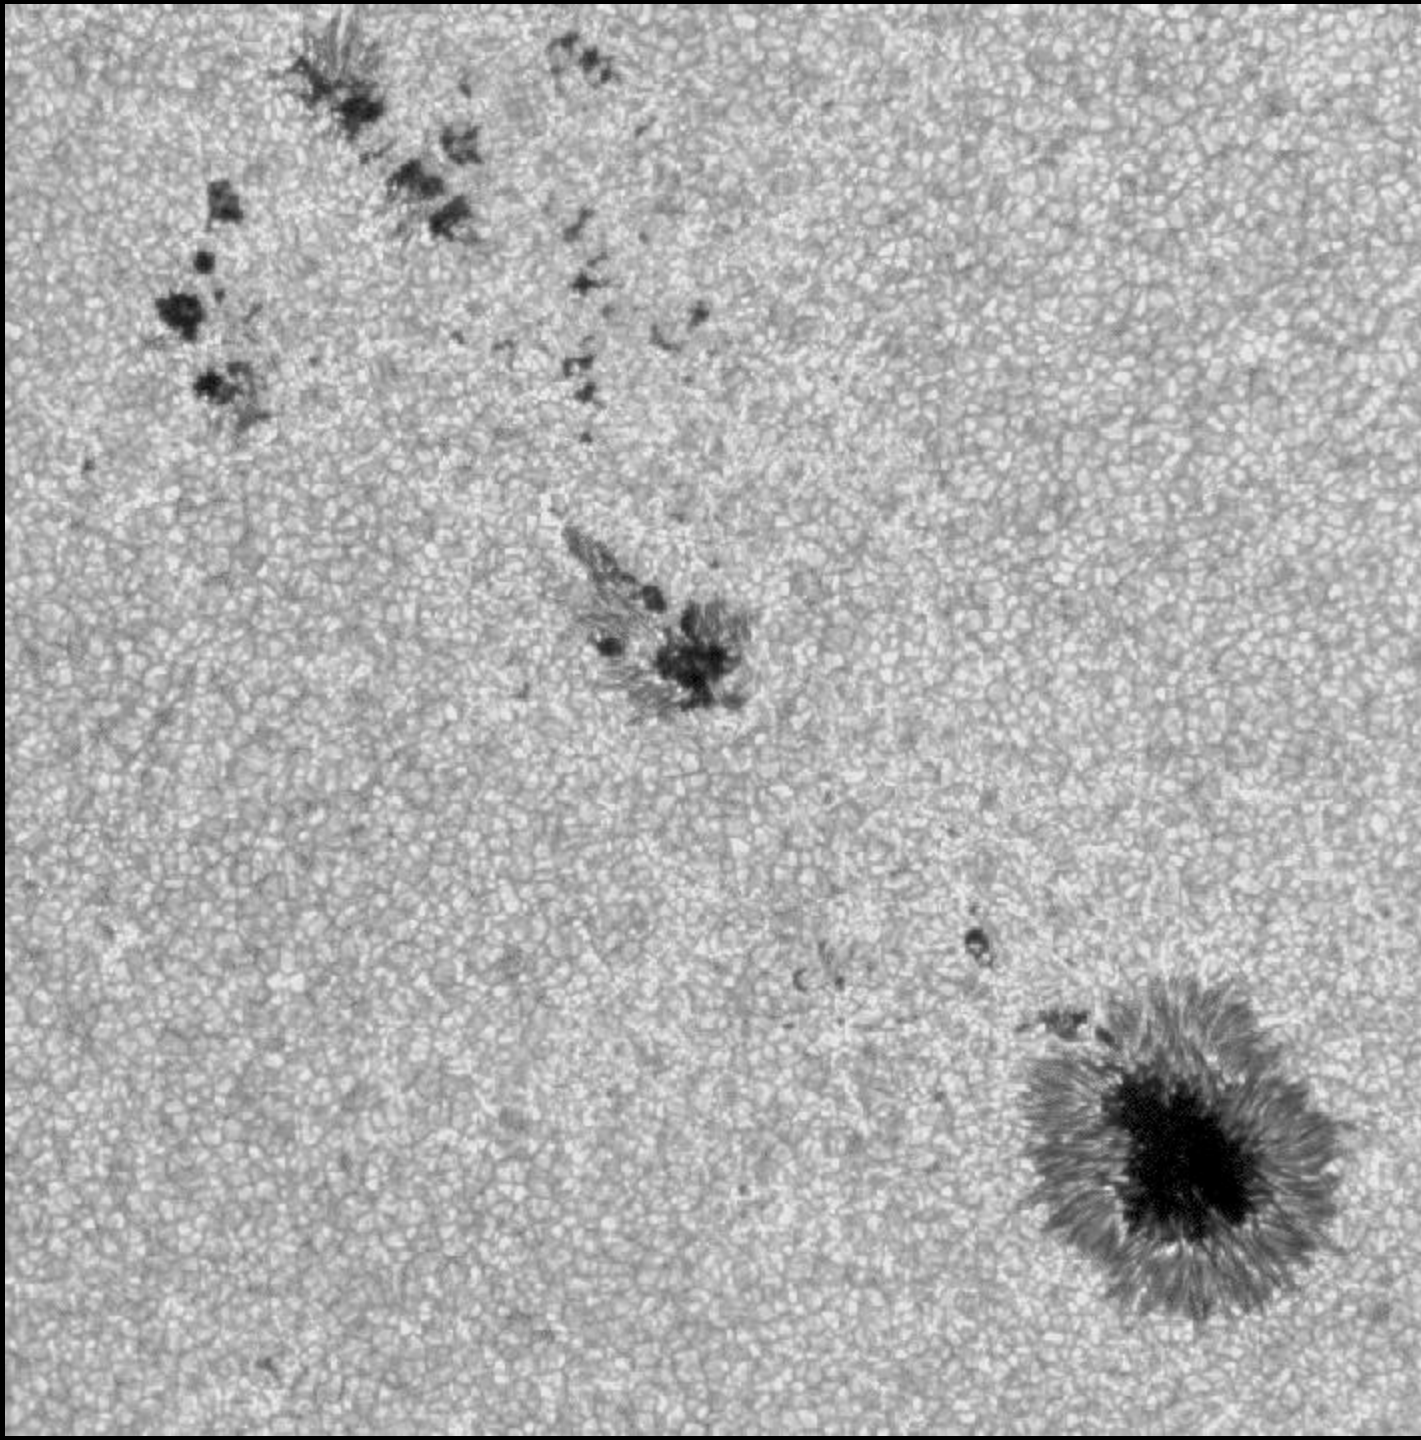


Solar F10.7 flux

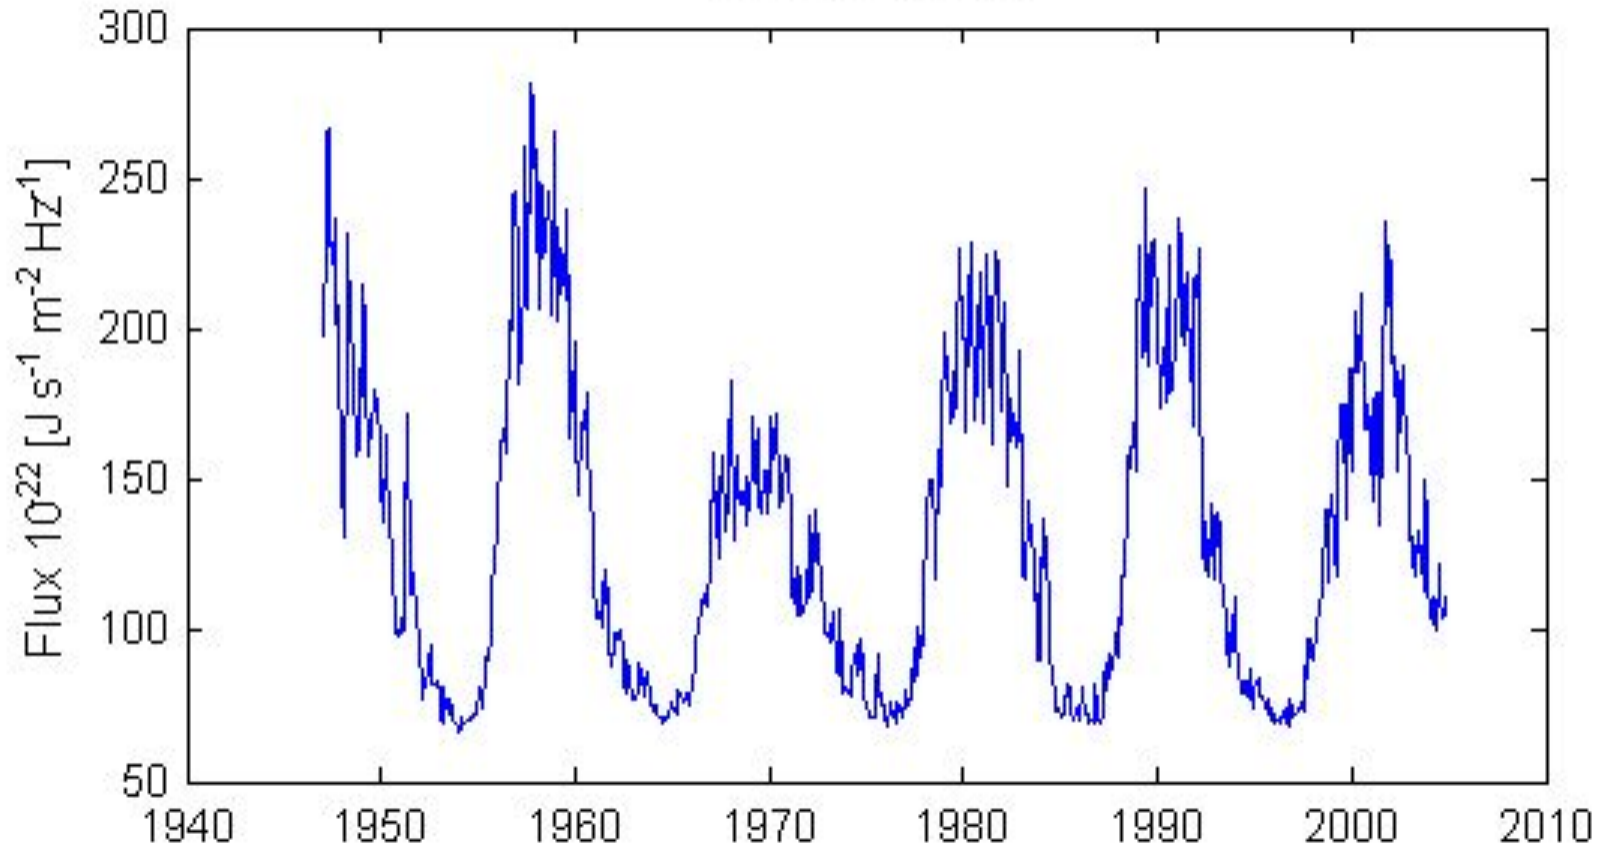


Variation of the F10.7 index throughout the last 60 years


LTCS campaigns vs Monthly F10.7

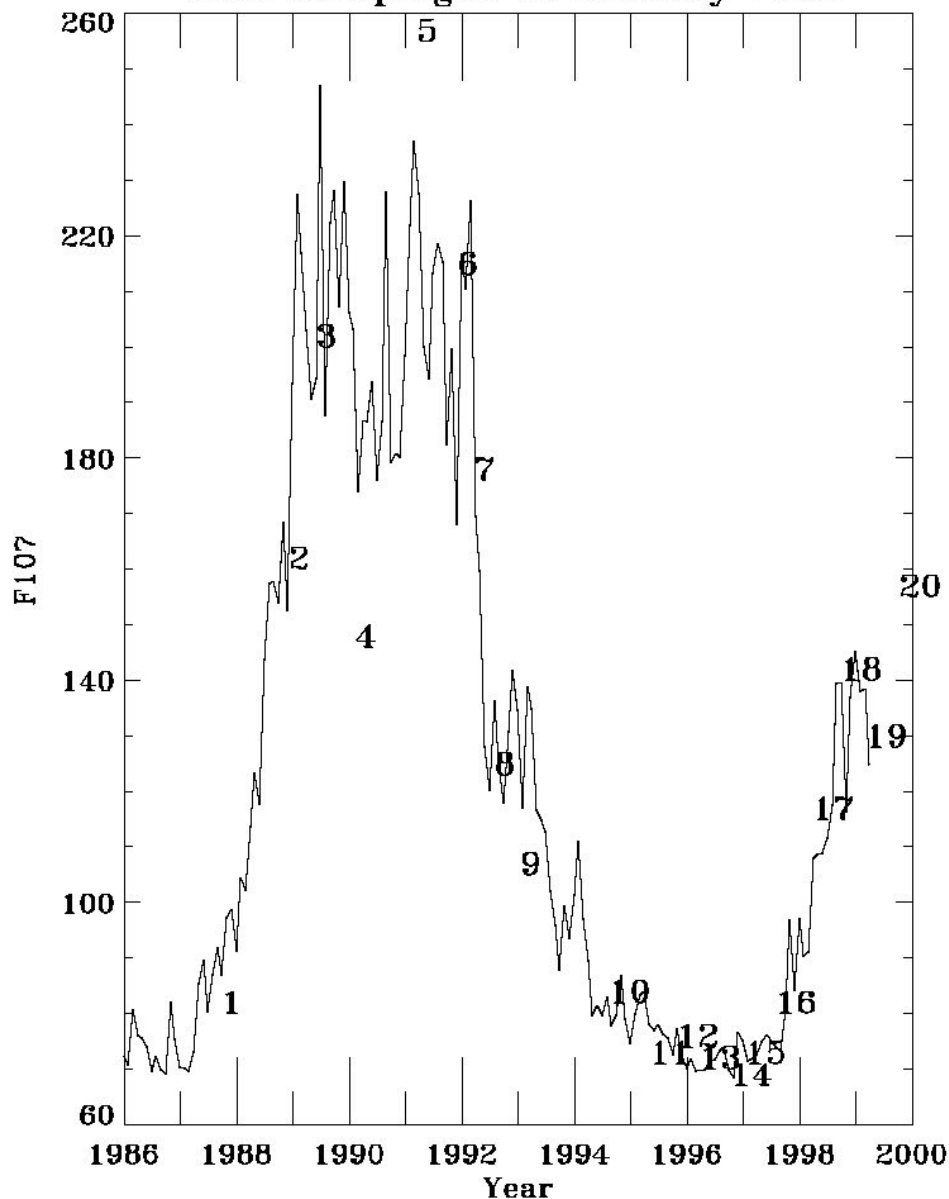

The structure of the F10.7 peaks is highly variable and difficult to predict

Cycle 23 Sunspot Number Prediction (October 2005)

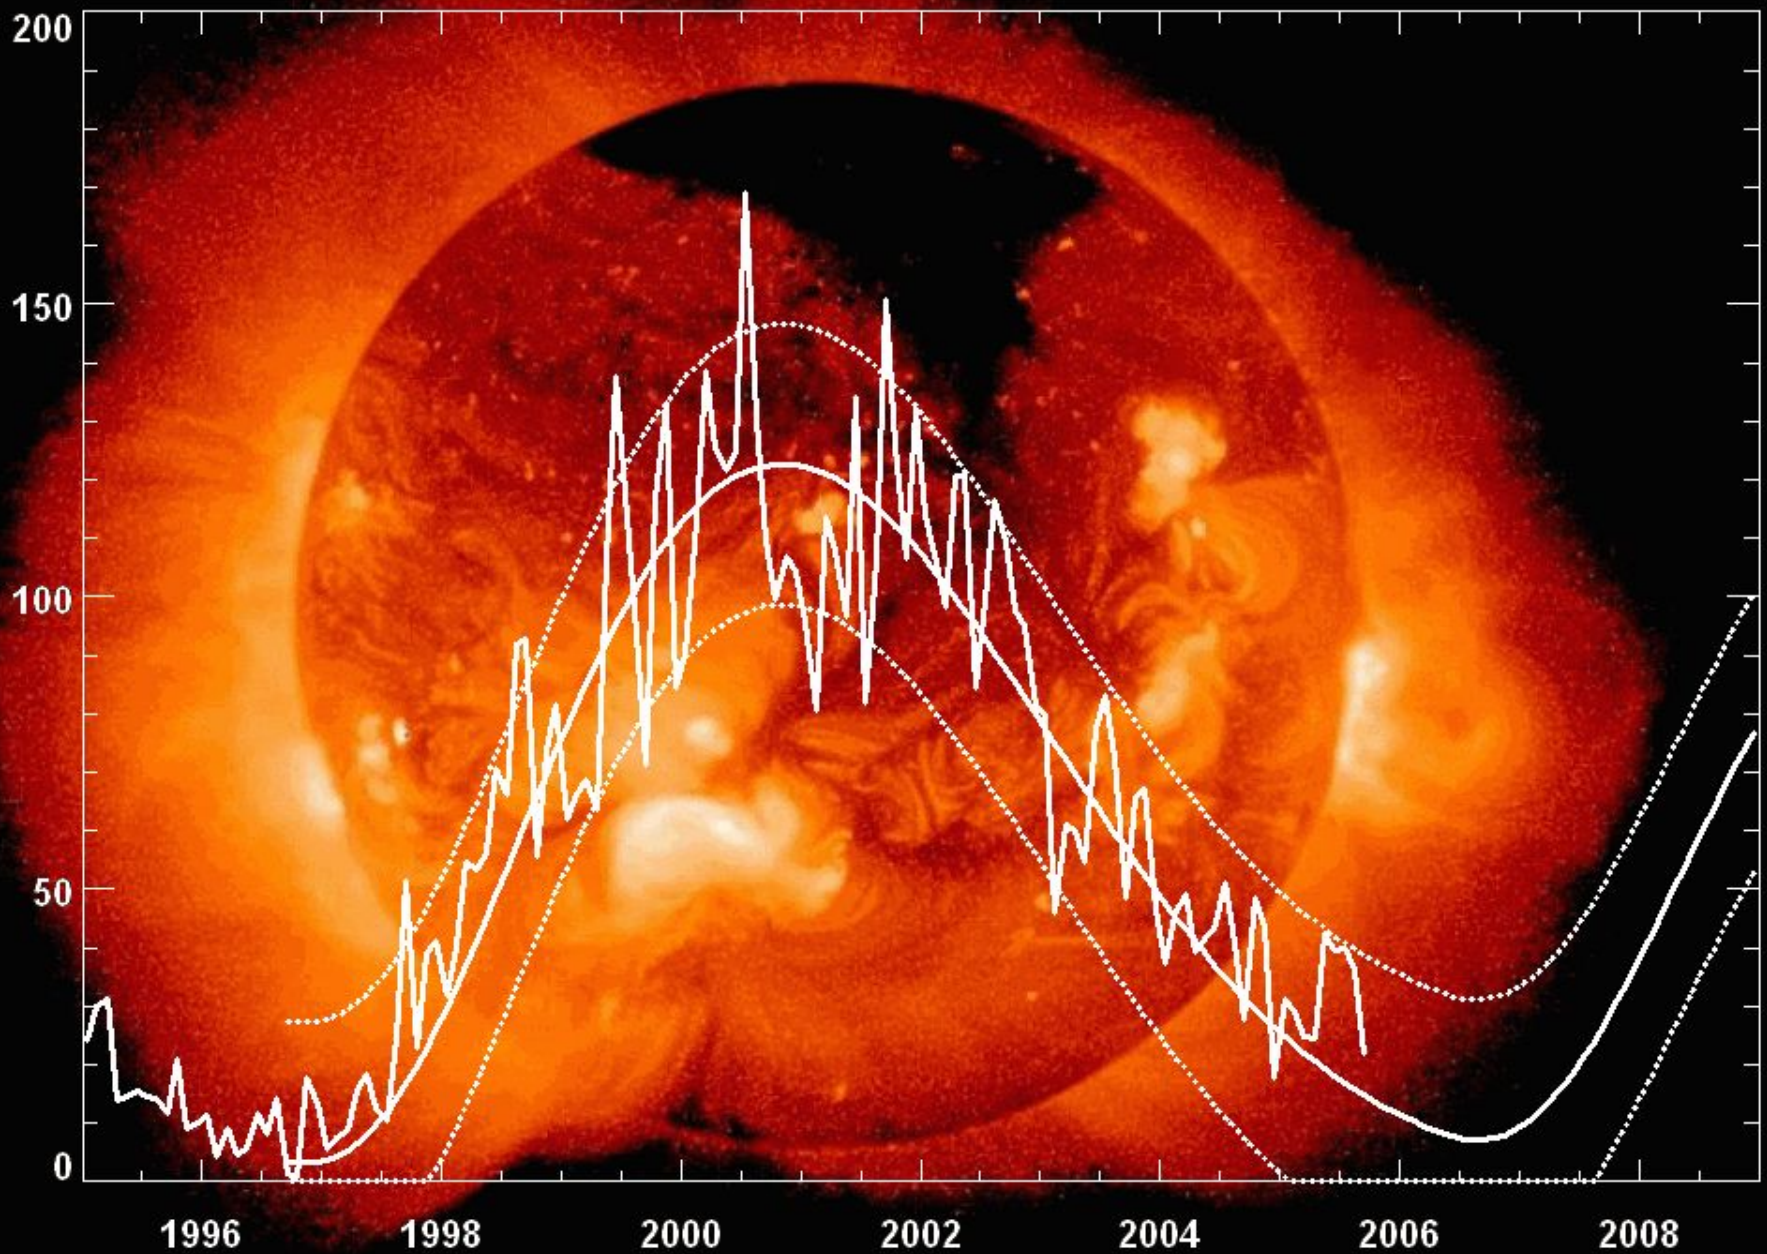

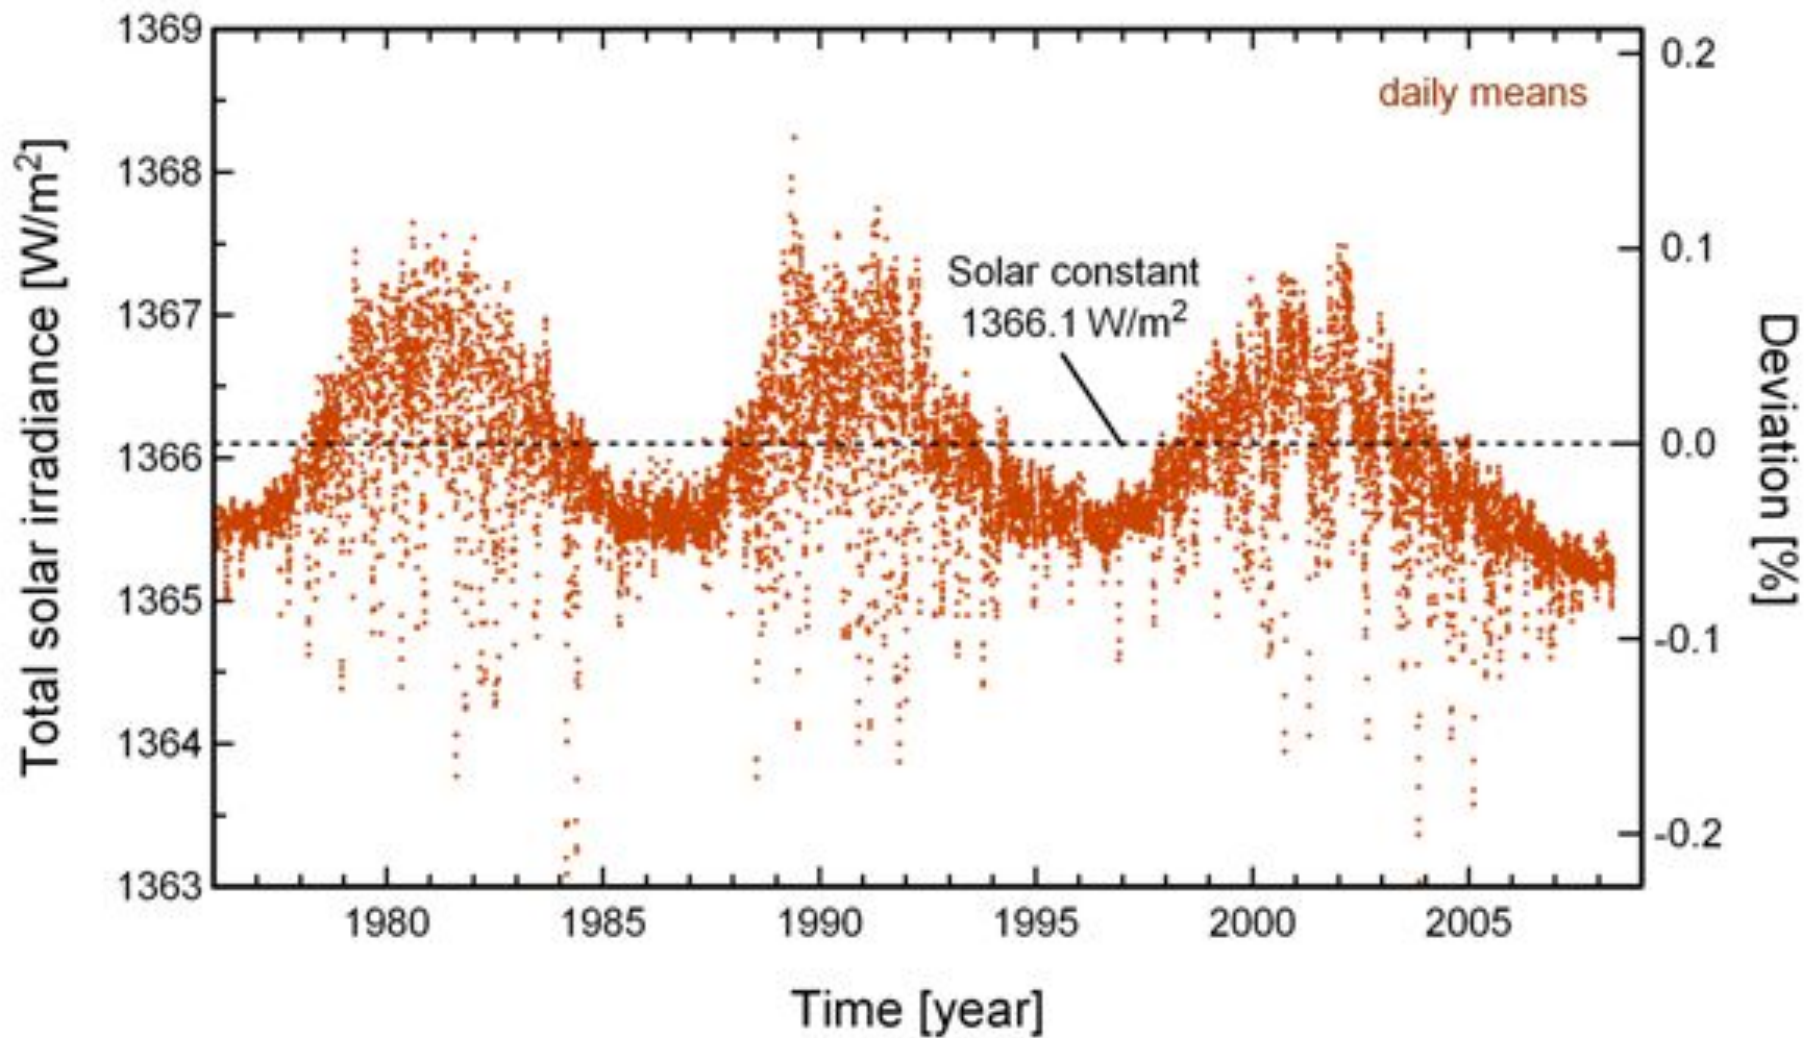

The Upper Atmosphere


- The atmosphere has no clear limits in height (but legally ends at 100 km above Earth's surface)
- Chemical species varies with height and solar activity
- Satellites decay by atmospheric drag if initial orbit is less than 1000 km at perigee

$$a = -0.5 \left(\frac{C_D A}{m} \right) \rho v^2$$

- One of the most popular models is [MSISE90](#)

The Upper Atmosphere

- For most satellites $C_D \approx 1.90 - 2.60$
- The presence of solar panels induce a lateral drag due to the thermal movement of the atmospheric constituents

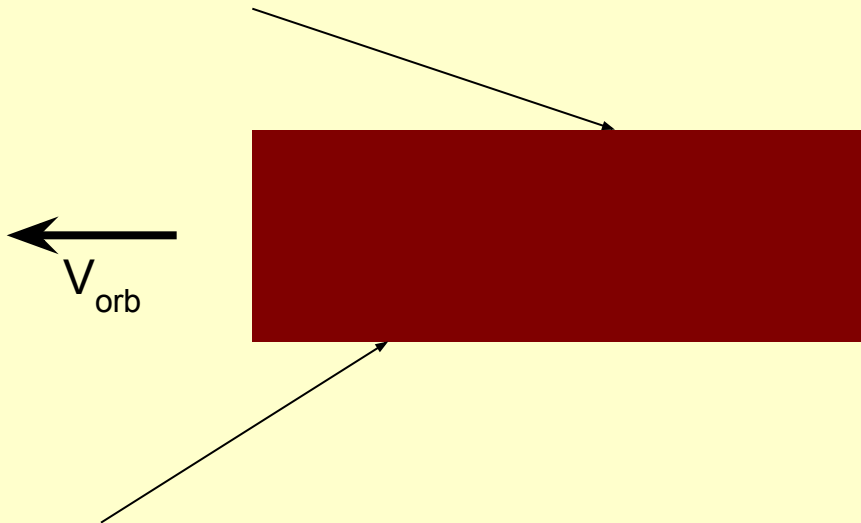

Maxwell-Boltzmann Distribution

- The particles of a gas at (macroscopic) temperature T move at different speeds. These speeds follow the Maxwell-Boltzmann distribution

$$f(v) = \left(\frac{m}{2\pi kT}\right)^{3/2} 4\pi v^2 \exp\left(-\frac{mv^2}{2kT}\right)$$


Maxwell-Boltzmann Distribution

- Then, the probable, mean, and rms velocities are

$$v_p = \left(\frac{2kT}{m} \right)^{1/2}$$

$$\langle v \rangle = \int_0^{\infty} v f(v) dv = \left(\frac{8kT}{\pi m} \right)^{1/2}$$

$$v_{rms} = \left(\int_0^{\infty} v^2 f(v) dv \right)^{1/2} = \left(\frac{3kT}{m} \right)^{1/2}$$

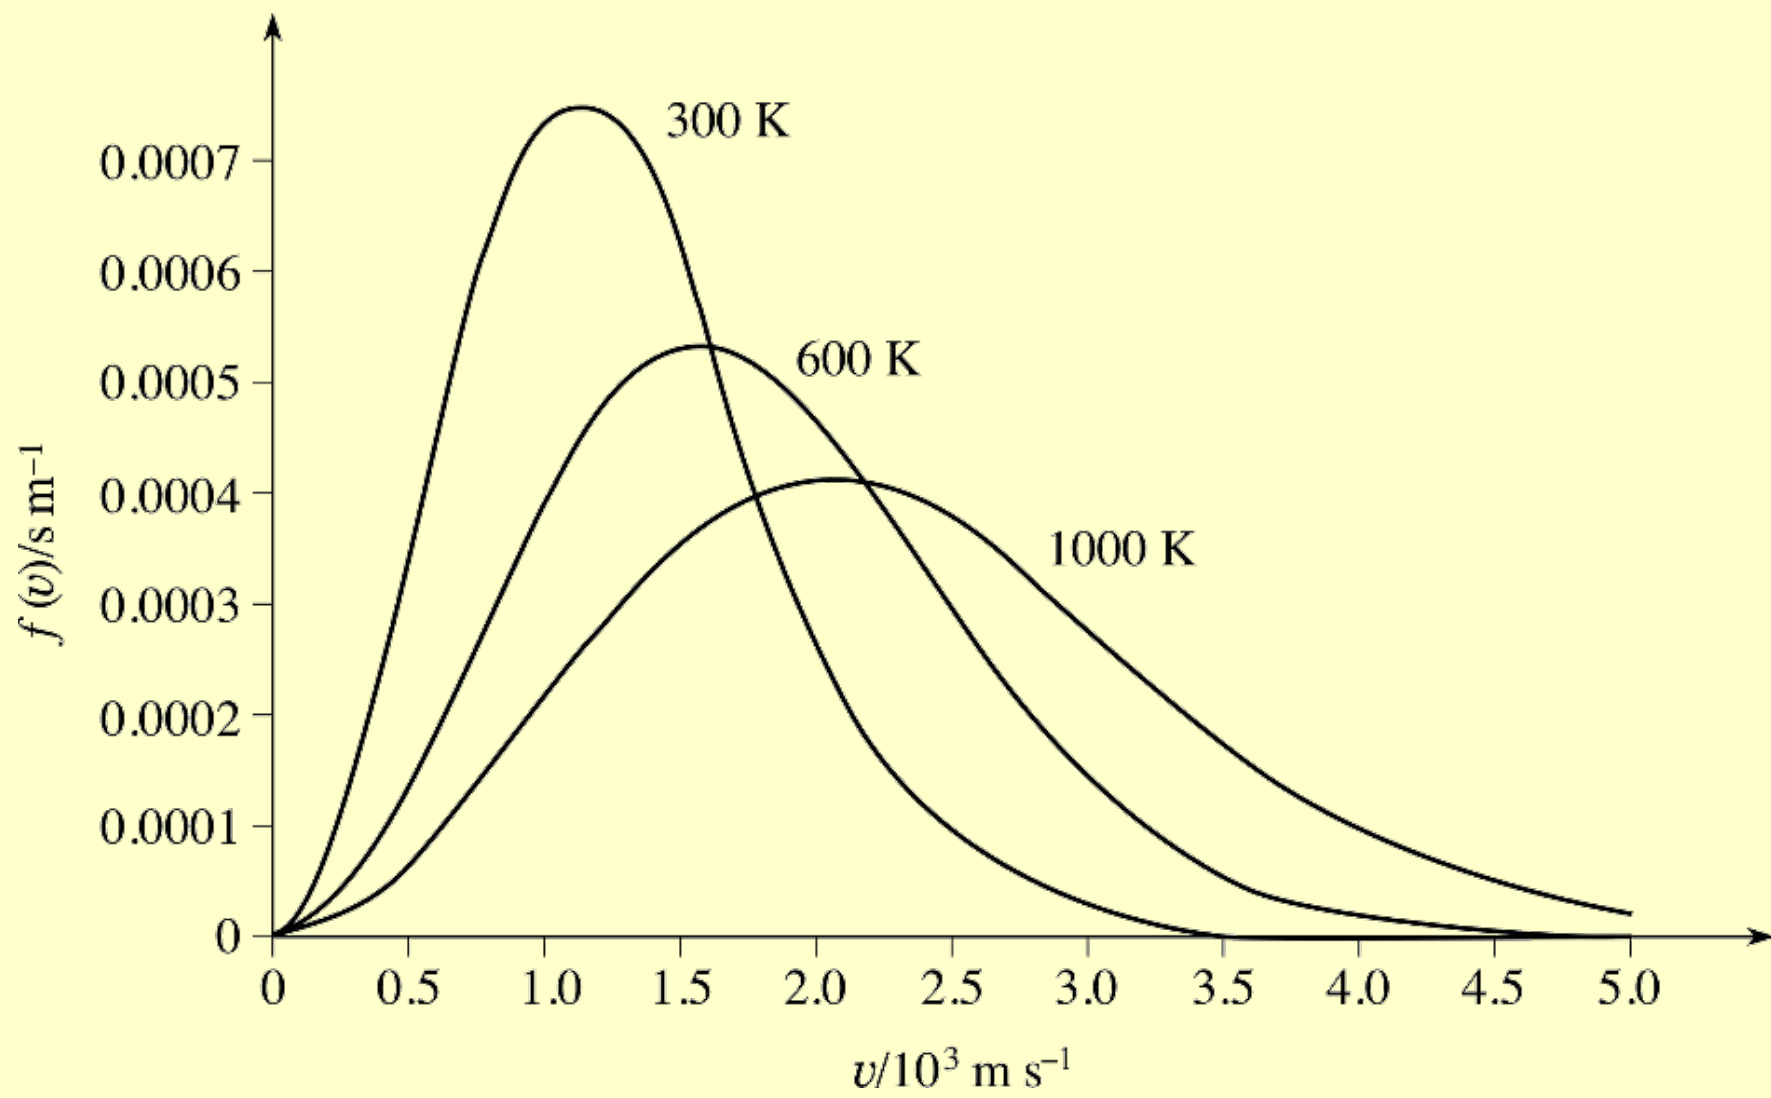


Knudsen number


- Measures whether the satellite moves in a continuum medium ($Kn < 1$) or in a free molecular flow ($Kn > 10$)
- It is defined as


$$Kn = \frac{\lambda}{L}$$
$$\lambda = \frac{k_B T}{\sqrt{2} \pi \sigma^2 P}$$


where λ is the mean free path (given above for a Maxwell-Boltzmann distribution) and L is the typical dimension of the satellite.

- In LEO $Kn \gg 1$ always

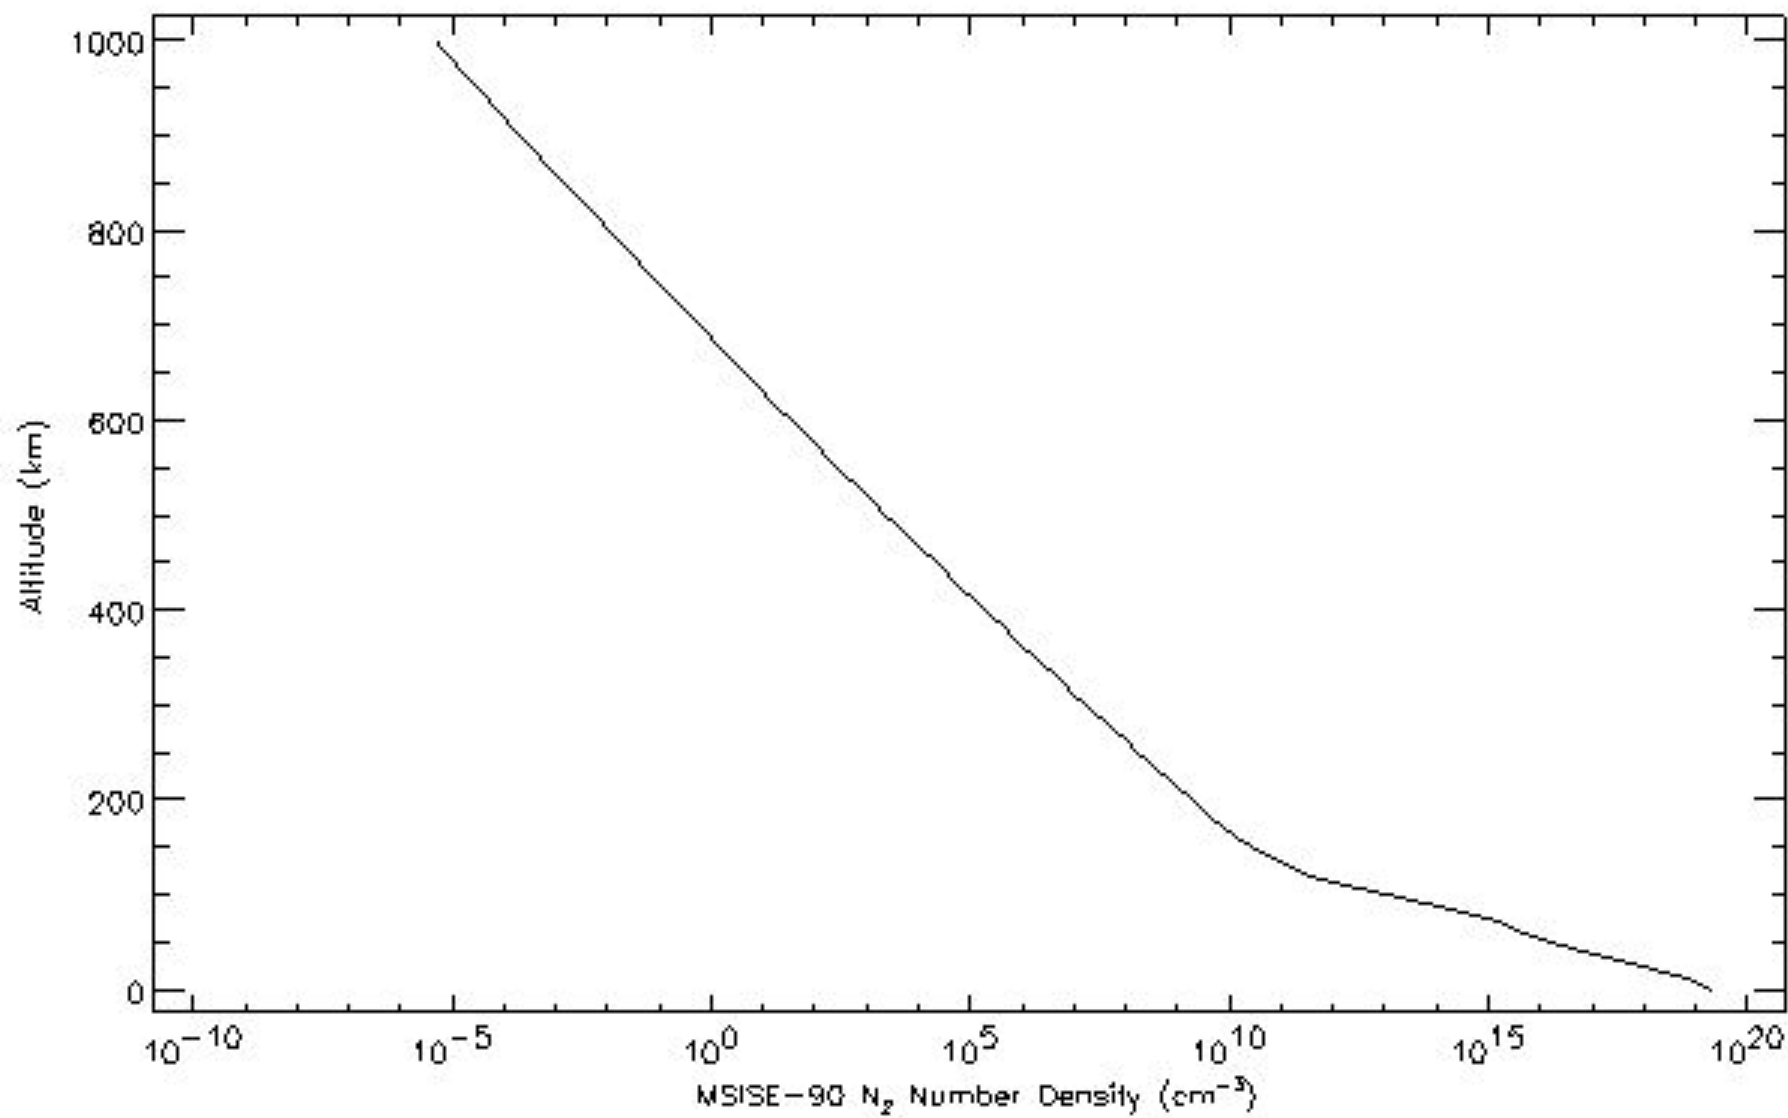

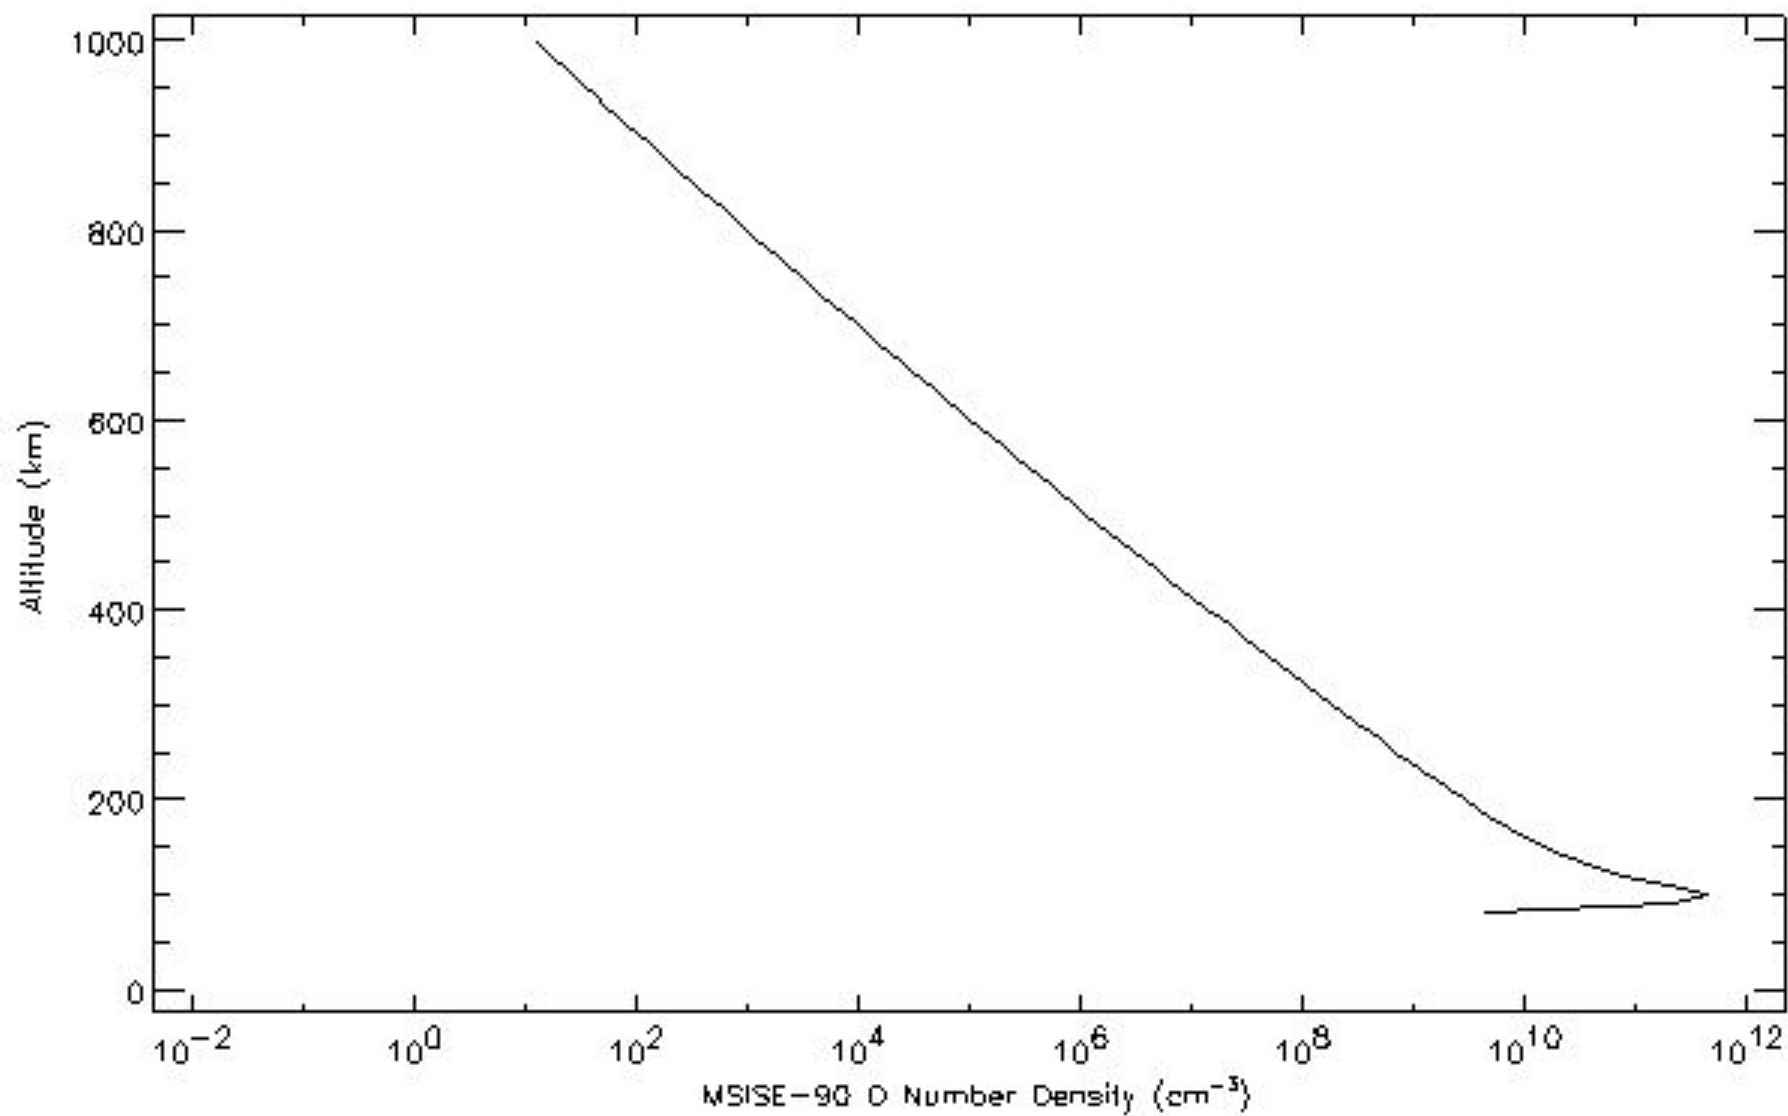

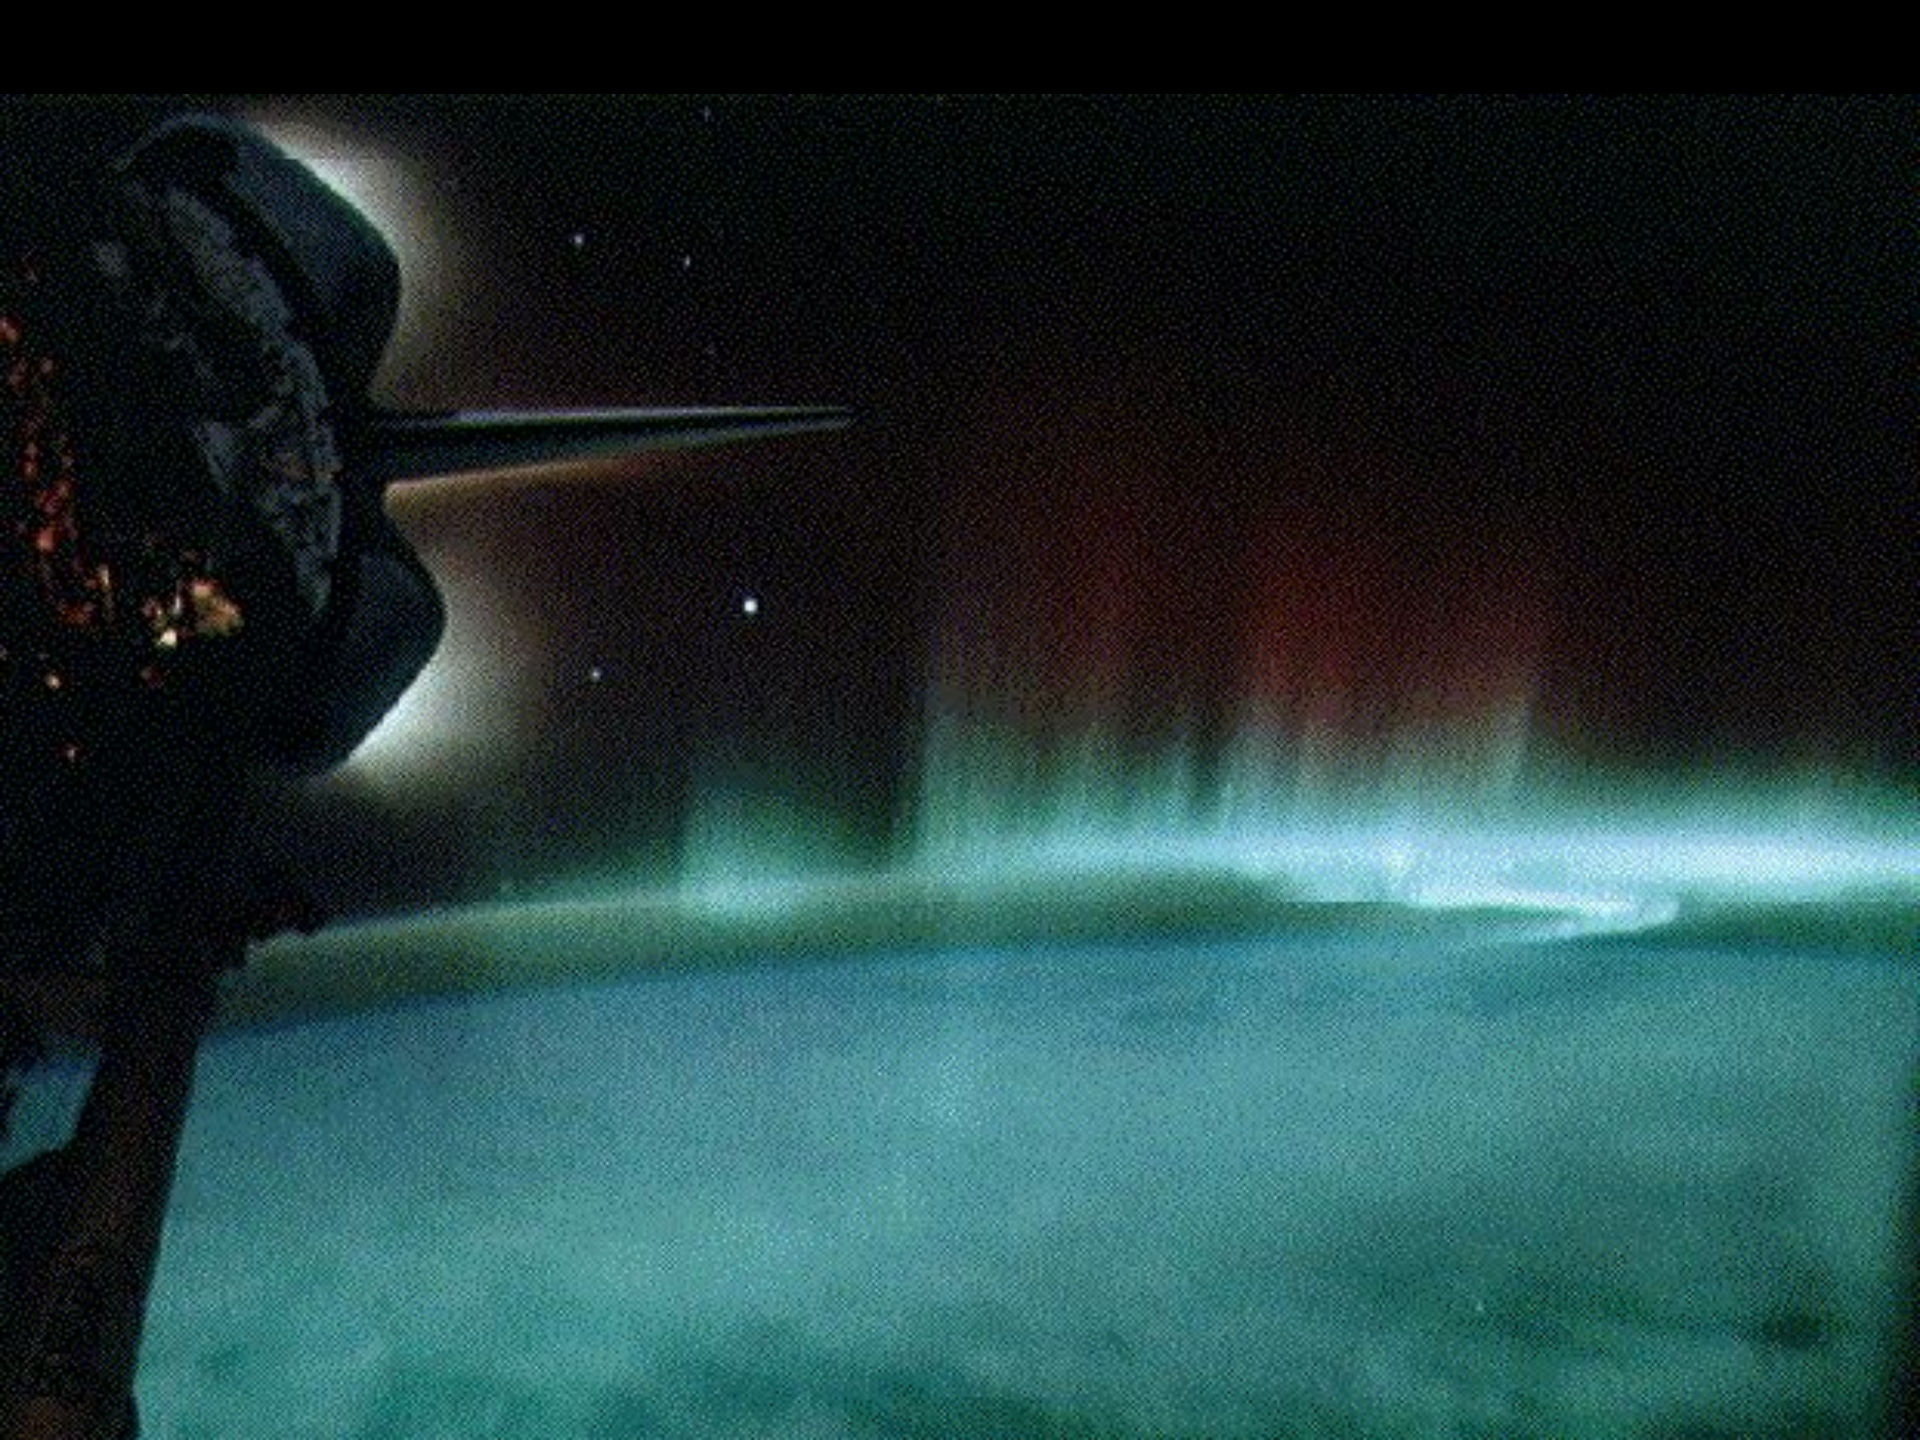

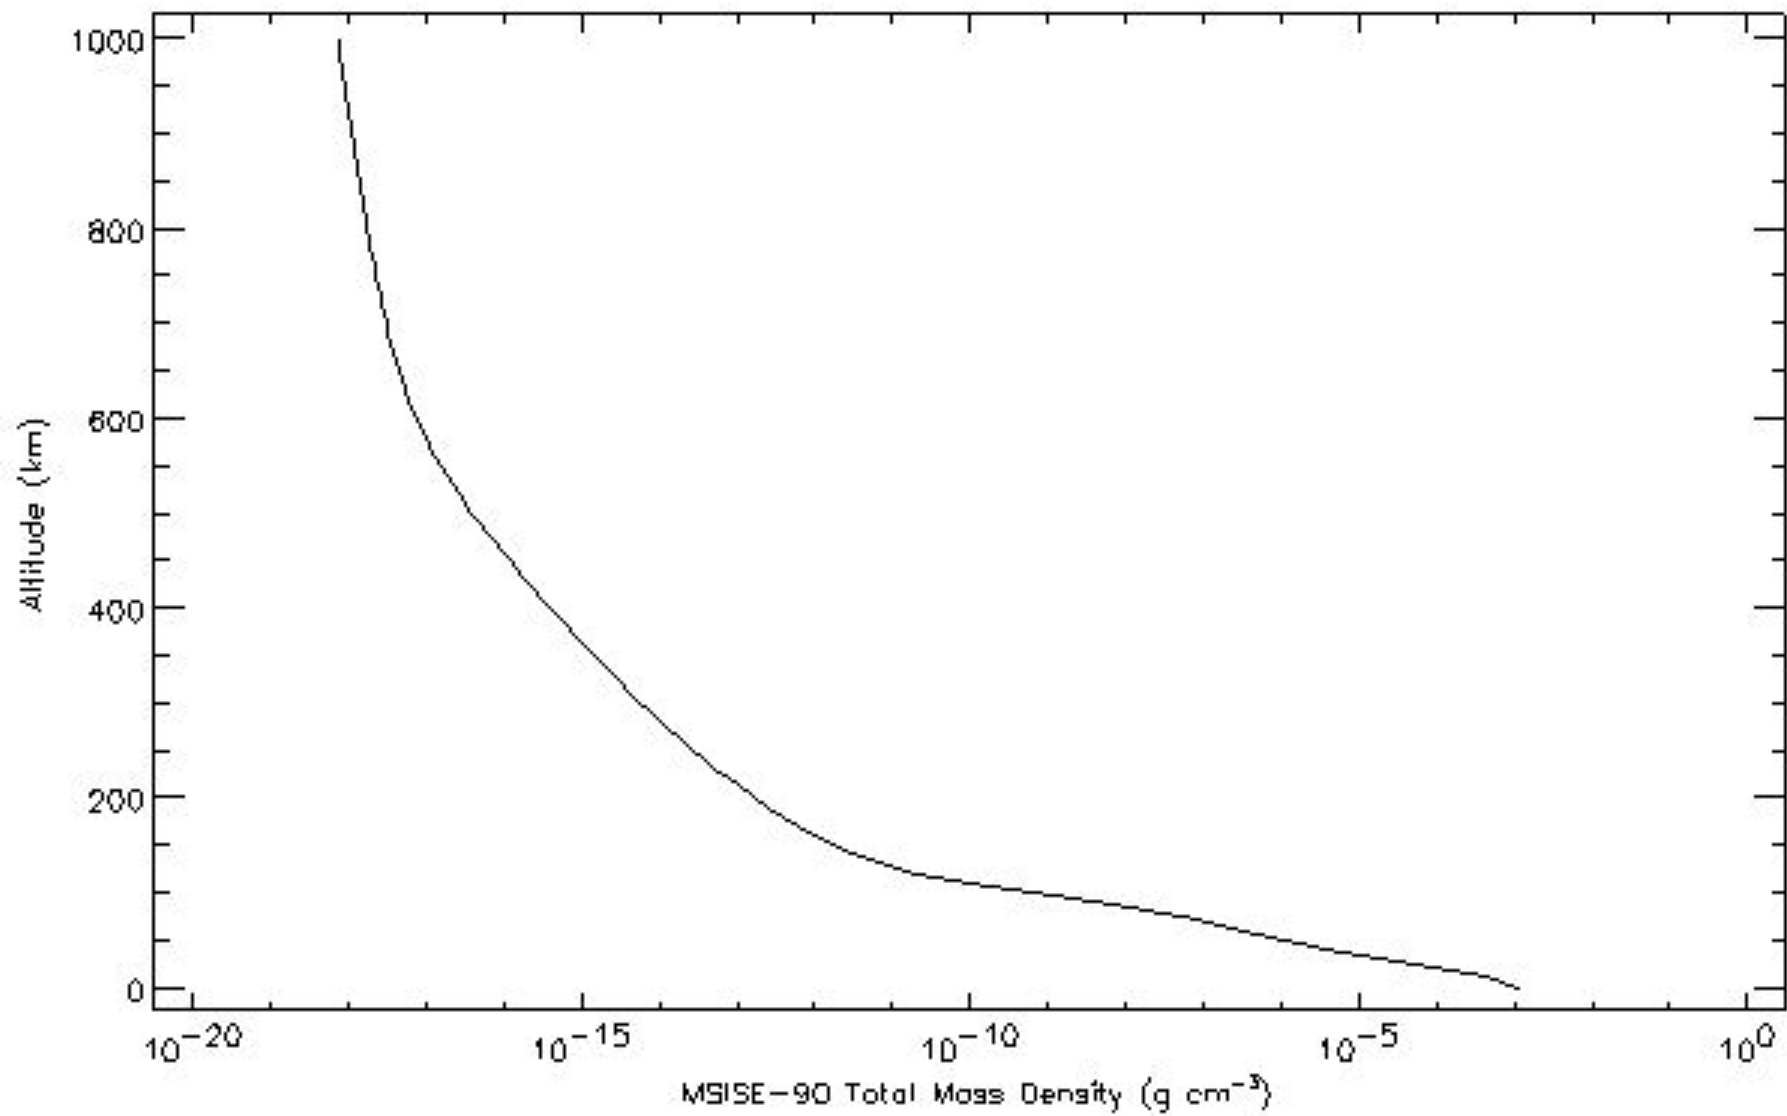

The Upper Atmosphere


- The Upper atmosphere is affected by the intensity of solar and geomagnetic activity
 - Density variations at heights of 500 to 800 km can be of a factor of 2 due to changes in solar activity
 - Geomagnetic activity is too short to be of much impact on satellites orbital lifetimes
- The region between 120 km and 600 km belongs to the thermosphere (with T in the range 600 K to 1200 K)
 - Heated by XUV


Effects of the Upper Atmosphere

- Aerodynamic drag which can lead to orbit decay
 - Depends of ballistic coefficient

$$BC = \frac{m}{C_D A}$$

- Aerodynamic lift, that can interact with attitude control
- Aerodynamic heating, with impact on thermal control and damages to the spacecraft at very low orbits
- Chemical interactions with exposed surfaces (particularly true for the reaction of atomic oxygen with organic polymers)

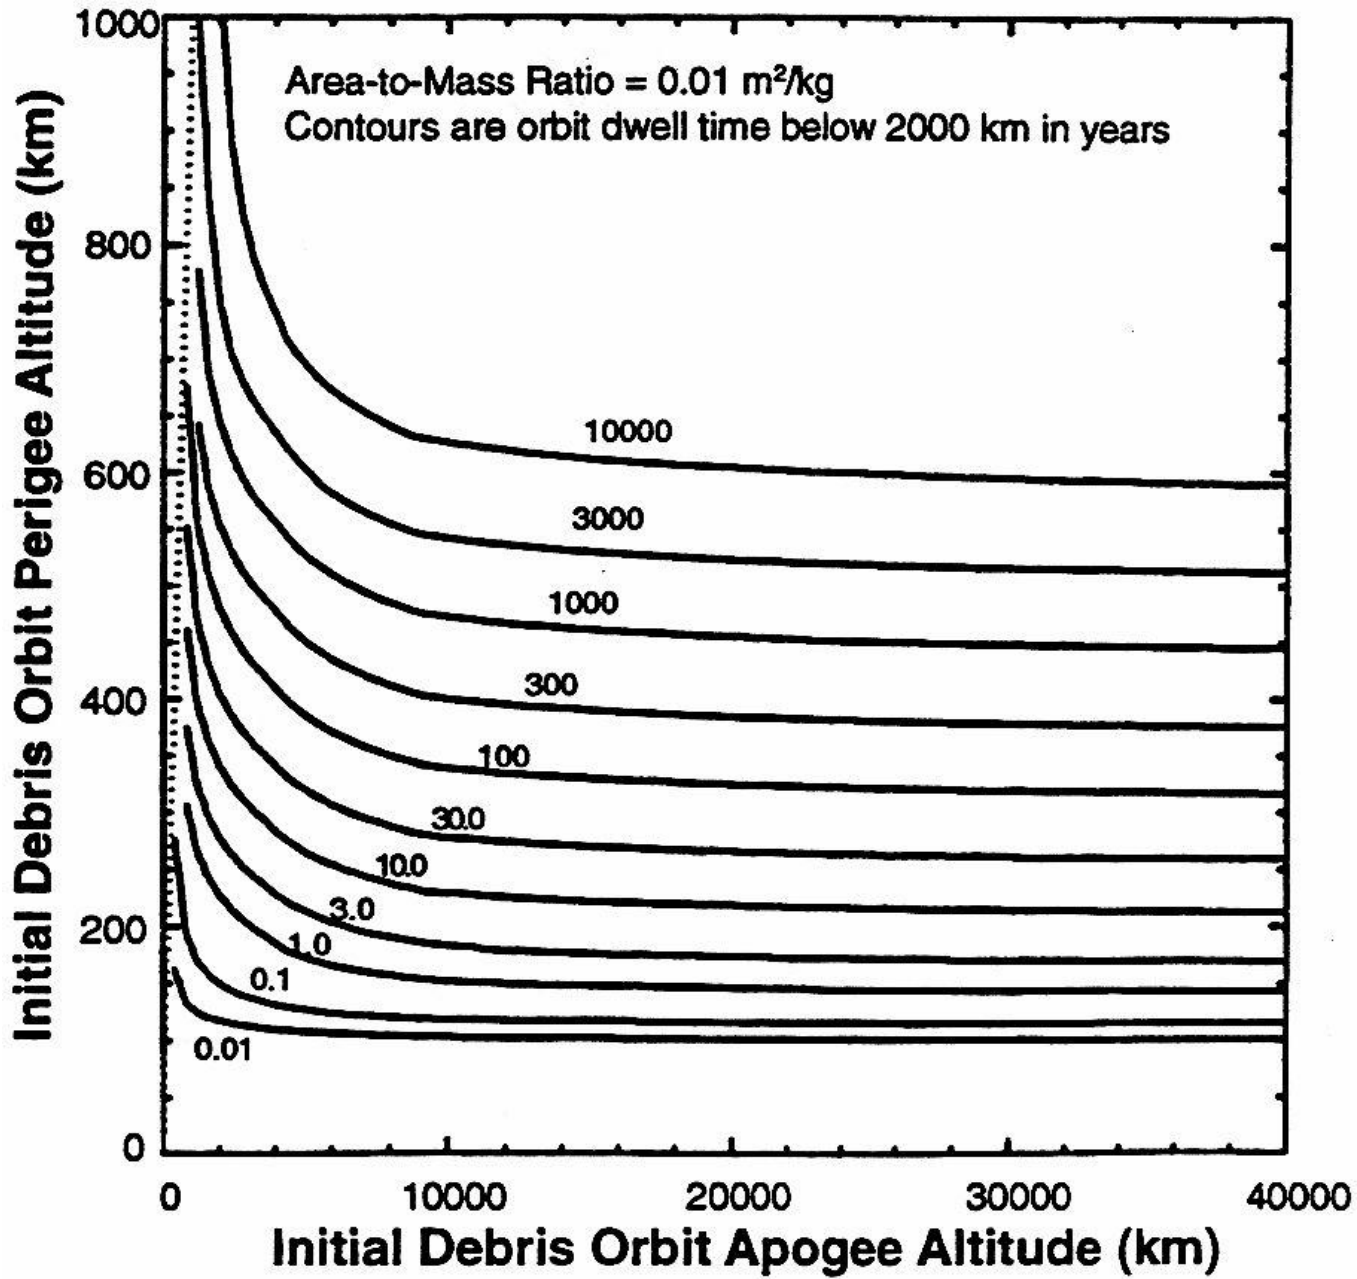

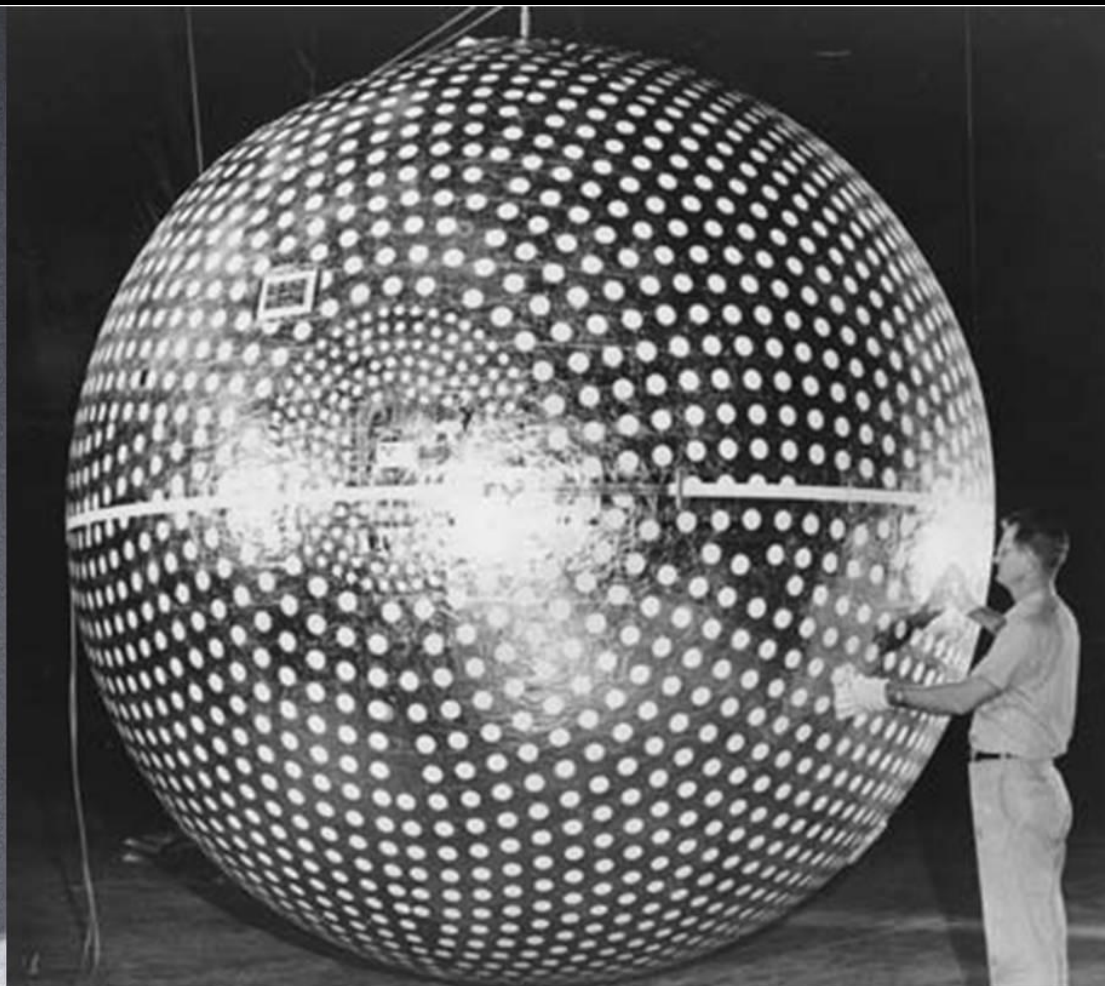

Mass = 7 kg Apogee = 2581 km
Diameter = 3.7 m Perigee = 635 km
BC = 0.326 kg/m² (C_D=2.0) inclination = 38.8°

Effects of the Upper Atmosphere

- Aerodynamic drag which can lead to orbit decay
 - Depends of ballistic coefficient

$$BC = \frac{m}{C_D A}$$

- When solar panels have large surface, lateral drag represents a significant contribution to C_D
- Aerodynamic lift, that can interact with attitude control
- Aerodynamic heating, with impact on thermal control and damages to the spacecraft at very low orbits
- Chemical interactions with exposed surfaces (particularly true for the reaction of atomic oxygen with organic polymers)
- Sputtering reactions degrade optical properties of exposed surfaces



UNIVERSITAT POLITÈCNICA DE CATALUNYA
BARCELONATECH

Escola d'Enginyeria de Telecomunicació
i Aeroespacial de Castelldefels

A Swarm of Femtosatellites to Determine the Density of the Lower Thermosphere

Carlos Lledó
Jordi L. Gutiérrez
Pilar Gil-Pons
Department of Physics
Universitat Politècnica de Catalunya


Pina 10, Sept 13–14, 2017
Universität Würzburg
Würzburg (Germany)

Why study the thermosphere?

- The thermosphere extends from 90 to approximately 600 km
- The region of interest for this mission is the lower thermosphere, between 100 and 250 km
 - It is badly known, as there are (almost) no satellites there
- The thermospheric density shows some trends difficult to understand
 - Secular decrease of average density (Emmert, Lean, & Picone, 2010)
 - The chemical composition may be changing
- In the thermosphere there are fast winds (up to several hundreds of meters per second)
- This region controls to a high degree the uncertainties of satellite re-entry predictions

Similar missions

- POPACS (Polar Orbiting Passive Atmospheric Calibration Spheres)
 - Three 0.1 m spheres of 1.0, 1.5, and 2.0 kg
 - Observed from the ground (TLE). Orbital elements changes give the density
 - Initial orbit: perigee at 355 km, apogee at 1455 km
- QB50: in-situ measurements of the lower thermosphere by means of 50 2U and 3U CubeSats (36 launched so far)
 - Ion neutral mass spectrometer - Flux- ϕ -probe experiment
 - Multi-needle Langmuir probe

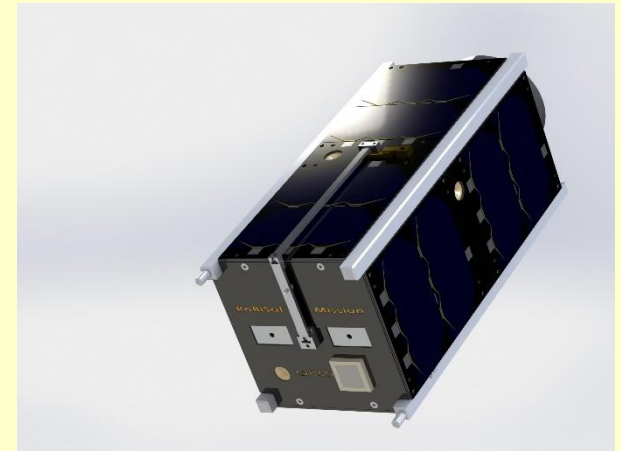

Direct density determination


- Our plan is to measure the deceleration of a spherical femtosatellite due to drag

$$\vec{a} = \frac{1}{2} \rho v_{\text{rel}}^2 \frac{SC_D}{m} \hat{v}_{\text{rel}}$$

where v_{rel} is the velocity of the satellite relative to the air;
the rest of symbols have their usual meaning

- The acceleration will be measured by a MEMS accelerometer
- Position and time tags will be provided by a MEMS GPS

$m=0.1$ kg, $C_D=2.2$ $d=5$
cm

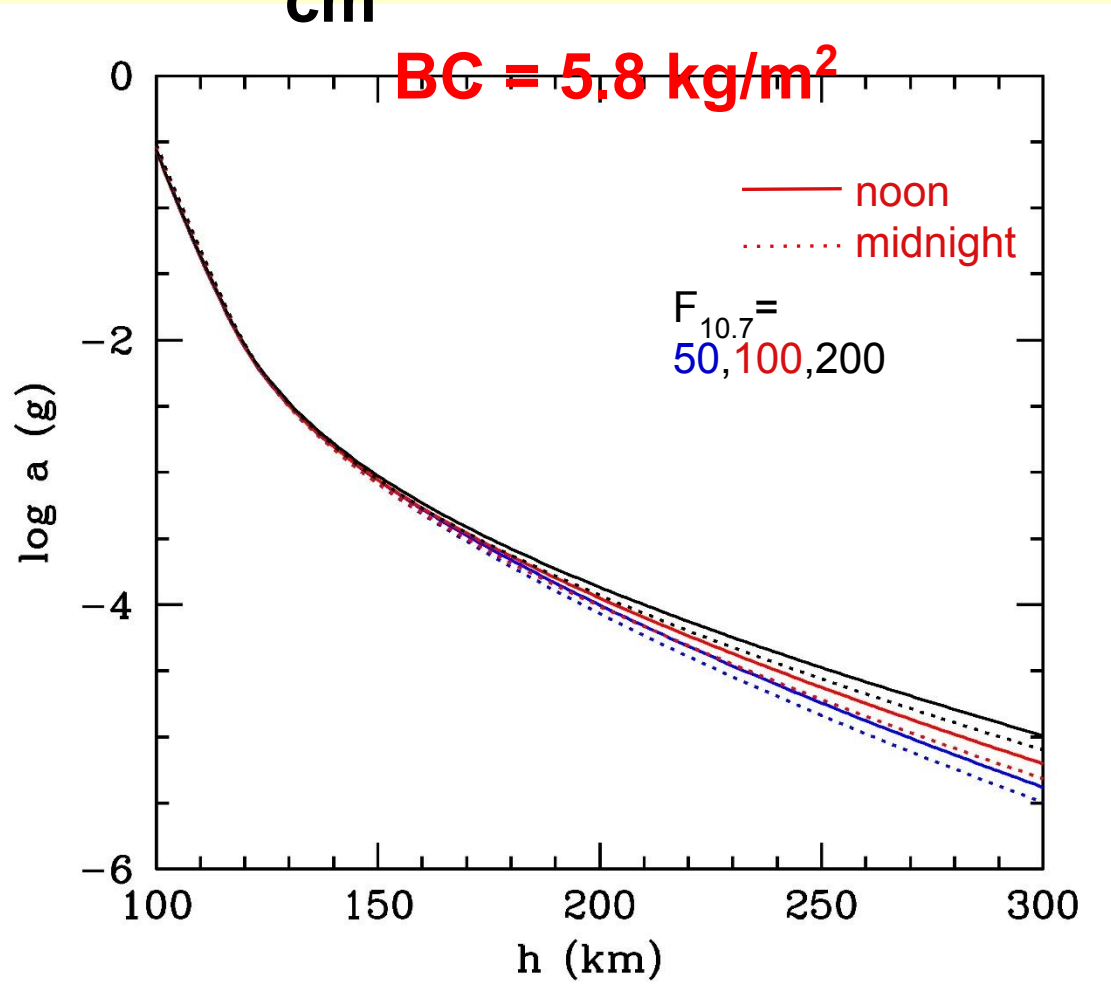

**NRL-MSISE00
model**

Our project

- Our plan is to set up a swarm of tens to hundreds of spherical femtosatellites to **simultaneously** determine the **density** of the lower thermosphere in **multiple locations**
- The swarm should be spread along many different orbital planes, and evenly distributed over each orbital plane (pearl necklace)
- Given the high density of the lower thermosphere, the swarm would survive approximately for one week

The femtosatellite (1)

- Spherical shape

- mass of 100 grams (maximum)
- Centre of mass in the geometric centre
- Diagonal inertia tensor with equal principal moments


$$I = \begin{pmatrix} K & 0 & 0 \\ 0 & K & 0 \\ 0 & 0 & K \end{pmatrix} = K \mathbb{I} \quad I = \begin{pmatrix} 37971.2 & -17.4 & -15.7 \\ -17.4 & 37596.6 & 238.8 \\ -15.7 & 238.8 & 37727.4 \end{pmatrix} \text{ g mm}^2$$

- Electronics embedded in a spherical aerogel
- Sub- μg noise density MEMS accelerometer (1D)
- MEMS GPS
- Primary battery (one week endurance)

The femtosatellite (2)

- Omnidirectional antenna
- Only Tx mode
- No ADCS subsystem
- Passive thermal control + aerogel
- Very low ballistic coefficient: about 6 kg/m^2

Electronics layout of the femtosatellite

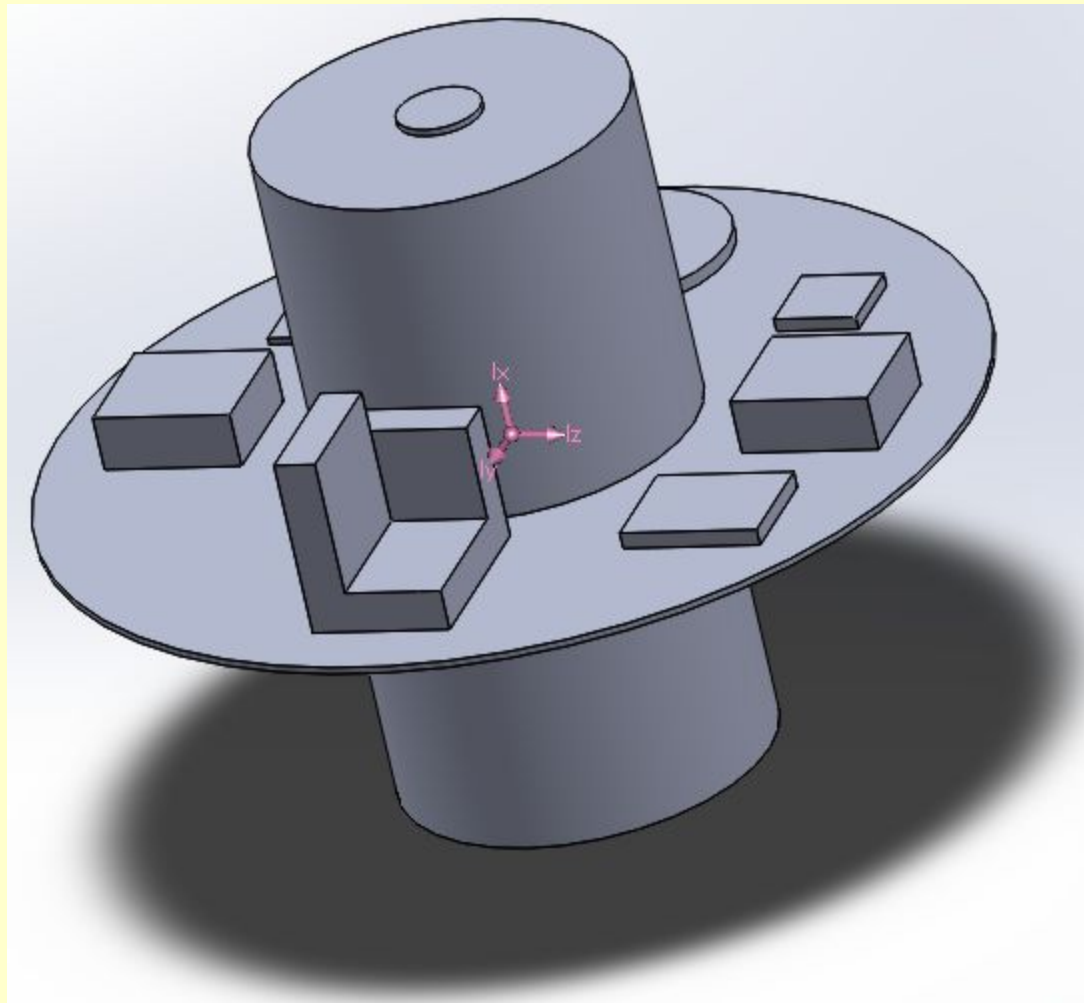

The accelerometers

- The accelerometers are the heart of the mission.
- We have identified two very sensitive MEMS accelerometers

Property	Units	ServoK-Beam (Kistler)	SF1500S.A (Colybris)
Accel. range	g	±2.5	±3.0
Sensitivity	V/g	1.5	1.2±0.1
T coefficient	μg/K	100	-200
Noise density	μg/√Hz	0.8	0.3
Op. Temperature	K	233 – 358	233 – 358

Accelerometer's noise

- The noise (N) is given by the noise density (N_0) and the bandwidth (BW):


$$N = N_0 \sqrt{1.6 \times BW}$$

Then, the accelerometers proposed for this mission have noise floors of 3.2 and 1.2 μg ($BW=10$ Hz), which allow their use up to heights over 300 km (we assume significant measures down to a level equal to twice the noise floor), which is above our maximum desired altitude

$m=0.1$ kg, $C_D=2.2$ $d=5$
cm

BC = 5.8

— Kistle
— r
— Colybri
— s

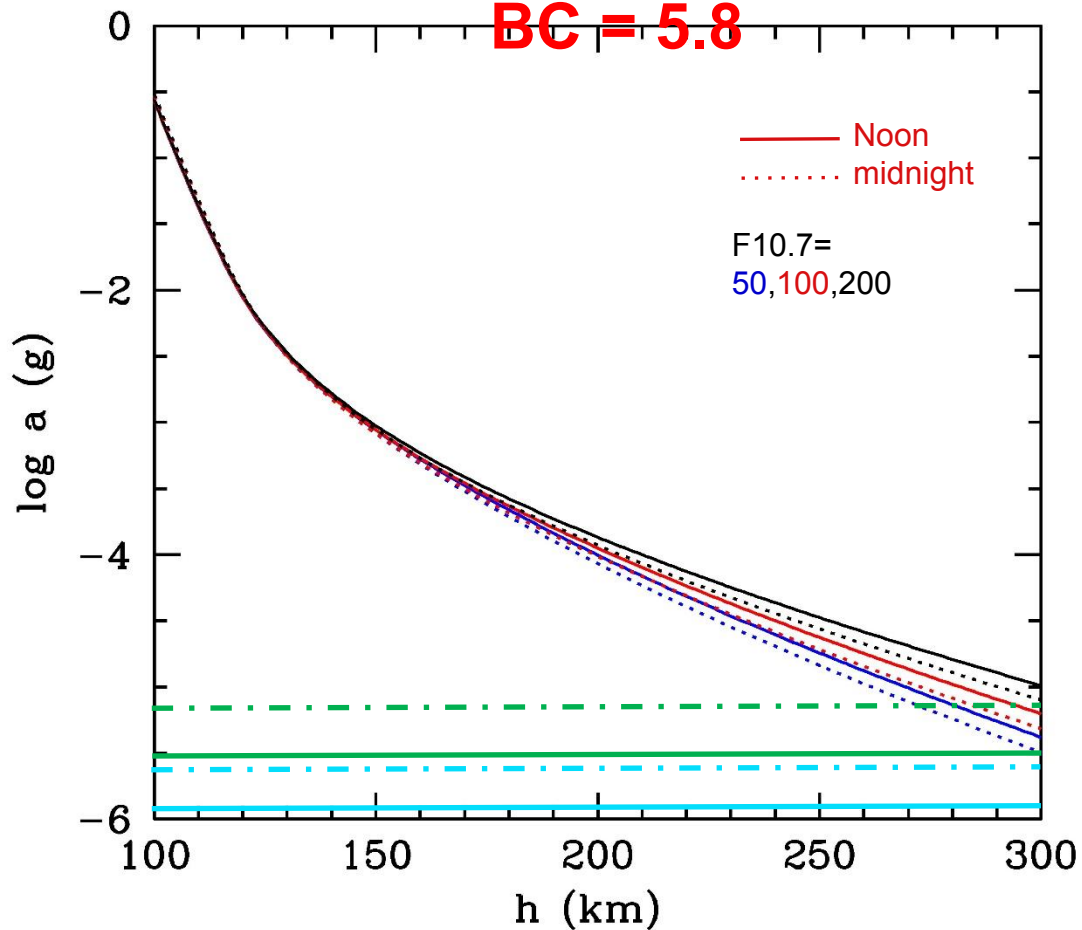

Continuous line: noise floor
dot-dashed line: twice noise floor


Data gathering

- Each femtosatellite would determine its deceleration once per second (locations 8 km apart)
- The data would also include position and time (both obtained through the GPS)
- GPS positions allow a cross-checking of accelerometer-derived density data
- Approximately 400 kbit per orbit and satellite
- Data downlinked to high latitude ground stations
- Orbits would be polar (to cover the whole Earth)

Thermal control

- Passive system
- Electronics embedded in a spherical aerogel
 - Very low mass
 - Exceedingly low thermal conductivity
- Aerothermal heating does not allow orbits below around 130 km (hard limit, as the following expression is valid for stagnation points)

$$q_{\text{aero}} \leq 3.05 \times 10^{11} \sigma \left(\frac{\rho}{\rho_{sl}} \right) \left(\frac{v}{v_{\text{circ}}} \right)^3 \frac{\text{W}}{\text{m}^2}$$

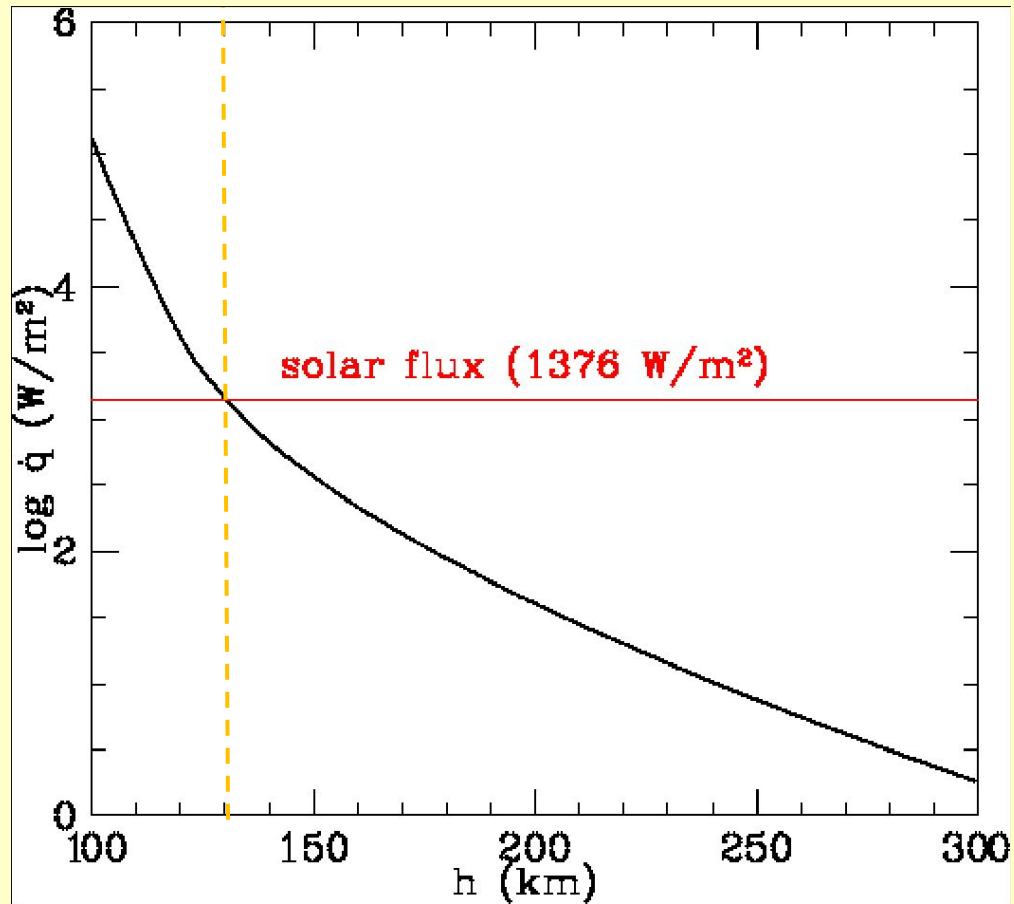

Noise sources and uncertainties

- Rotational state of the satellites
- Non-orthogonality of the 1D accelerometers (cross-linking)
- Drag coefficient: we have taken $C_D = 2.2$ as a first guess, but it should be determined as a function of the thermospheric properties
- Non-circularity of the orbit: this will induce a small but detectable acceleration. It can be corrected with GPS data
- Wind velocity: the velocity and direction of thermospheric winds would affect the drag (by changing the relative velocity to the remaining atmosphere)
- Gravitational field: small noise due to non-spherically symmetric gravitational field (corrected with high-precision *Grace* data)

Open problems

- Launch and dispersion of a truly Earth-covering swarm
- Accelerometer testing
- Battery's limited endurance (“Remove before flight” system)
- Aerogel and its protective cover

Conclusions and future work


- The mission seems feasible
- Launch and dispersion still an issue

- Accelerometer testing
- Flatsat testing
- Deployer design

Mass and power budgets

System	Mass (g)	Voltage (V)	I (mA)	P (W)	Oper. T (C)
Accelerometer (3)	6	6	8.5	0.051	-40 to +85
GPS	1	2.85	10	0.029	-40 to +85
Flash memory	1	1.7	23	0.039	-30 to +85
Transmitter (on)	1	3.3	500	1.65	-40 to +85
Microcontroller	3	3	0.6	0.02	-40 to +125
Volt. Reg. (2)	4	3.6	3.5	0.026	-55 to +150
Battery	53	3.6	-	-	-55 to +85
Total (peak)	69	-	-	1.802	-30 to +85
Total (low)				0.168	

$M=0.1 \text{ kg}, C_D=2.2 D=5 \text{ cm}$

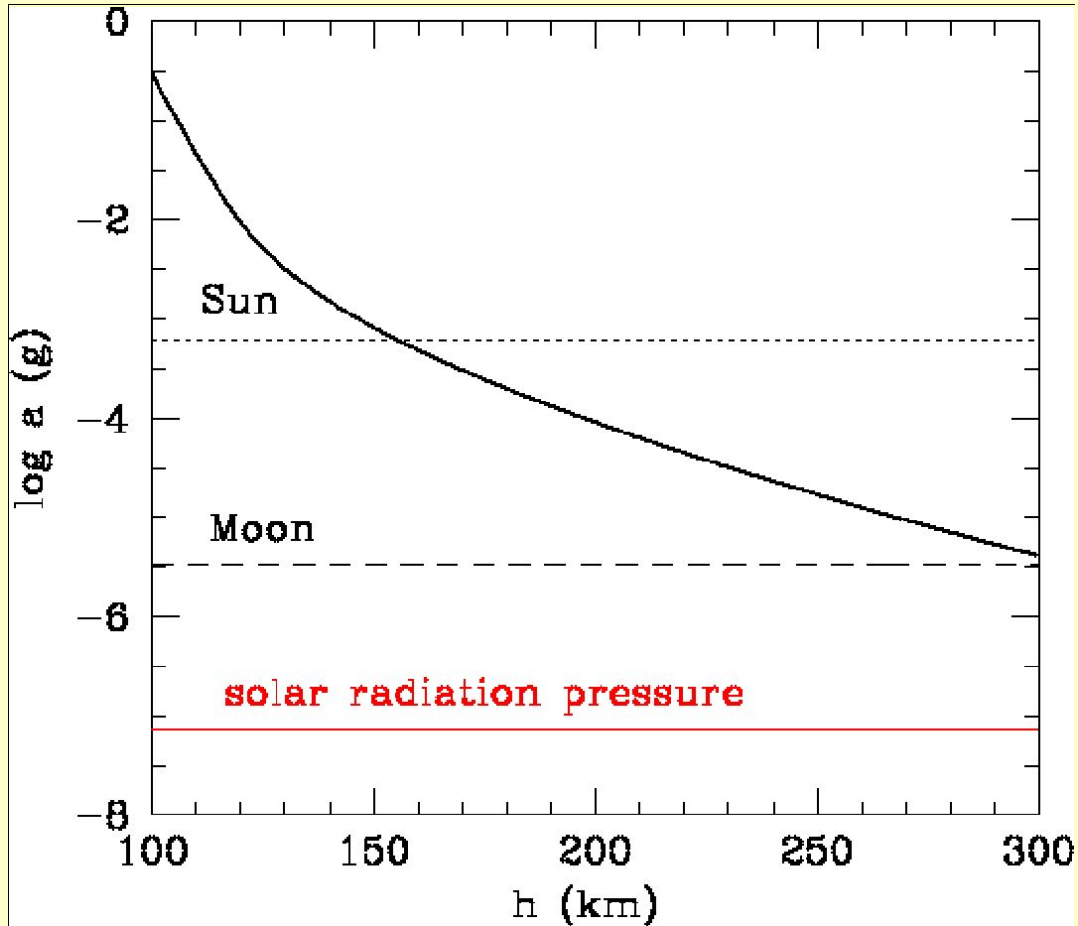

The swarm as a space debris hazard


- A large swarm could be seen as a potential risk for other space agents
- The low BC and altitude warrants a lifetime of one week (perhaps 10 days) before re-entry
- At these low altitudes there are no satellites (except some intelligence ones on their perigee?)

Atomic oxygen erosion (1)


- In the height range 120–800 km, the main atmospheric constituent is atomic oxygen (AO)
- It is a highly reactive species, that can degrade in a matter of weeks several kind of surfaces (especially organic materials, like Kapton or Kevlar)
- The mass lost by AO impacts is

$$dm = \rho_t RE \phi_{AO} dA dt$$

being ρ_t the density of the target, ϕ_{AO} the flux ($\text{cm}^{-2} \text{s}^{-1}$) of atomic oxygen, and RE the efficiency of the reaction (in cm^3 per impacting AO).

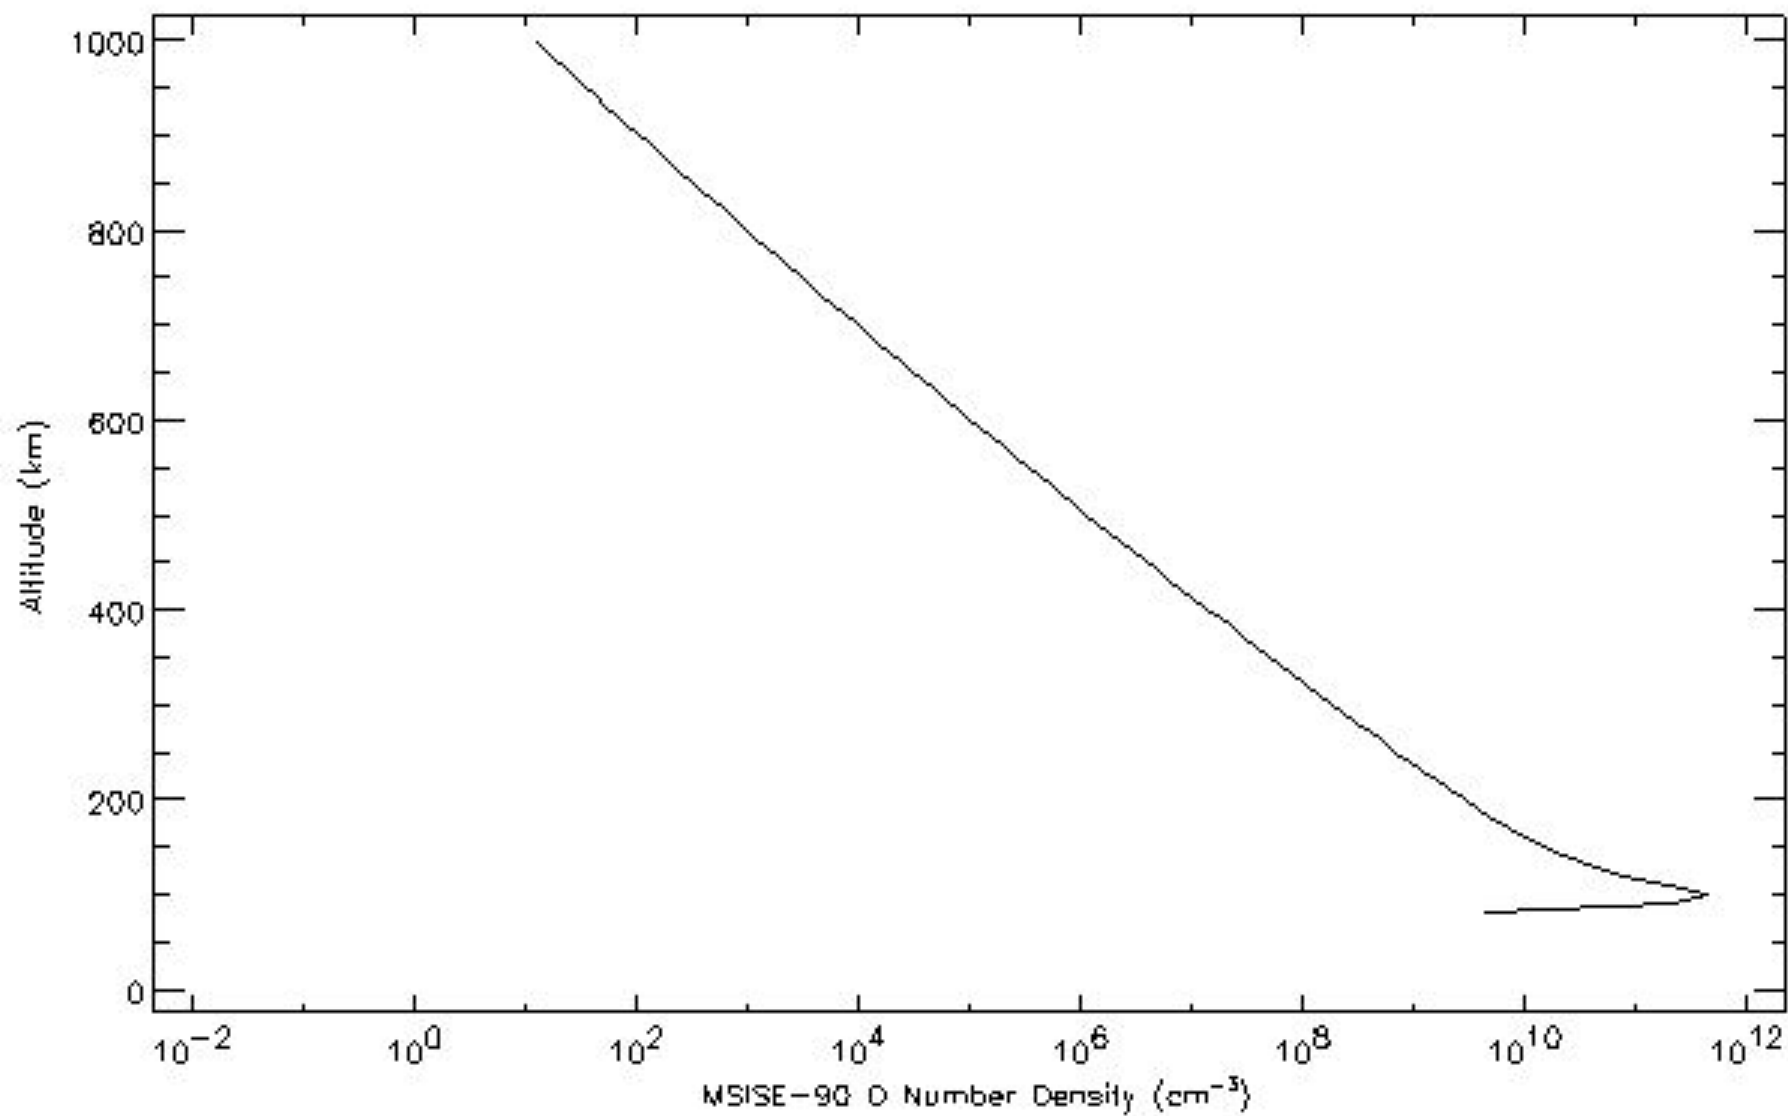

Atomic oxygen erosion (2)

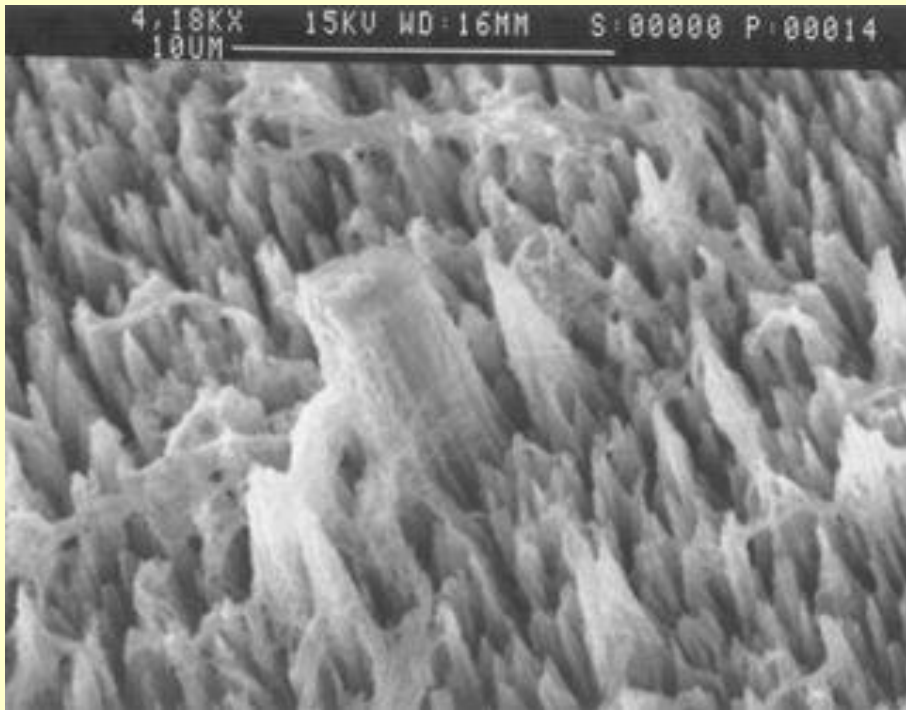

The surfaces exposed to AO erosion change substantially its surface roughness, and with it its thermal and optical properties

Atomic oxygen erosion (3)

- The RE, which can be a function of T, impacting energy and AO flux, must be experimentally determined


Target material	RE (10^{-24} cm ³ /AO particle)
C	0.9 – 1.7
Teflon	0.03 – 0.50
Mylar	1.5 – 3.9
S13GLD (paint)	0.0
Kapton	1.4 – 2.5

Sputtering (1)


- The kinetic energy of atmospheric molecules is high enough to attack the exposed surfaces

Height (km)	Velocity (km/s)	Atomic/molecular energy (eV/particle)					
		H	He	O	N ₂	O ₂	Ar
200	7.8	0.3	1.3	5.0	8.8	10.1	12.6
400	7.7	0.3	1.2	4.9	8.6	9.8	12.2
600	7.6	0.3	1.1	4.7	8.3	9.5	11.8
800	7.4	0.3	1.1	4.5	7.9	9.0	11.2

Sputtering (2)

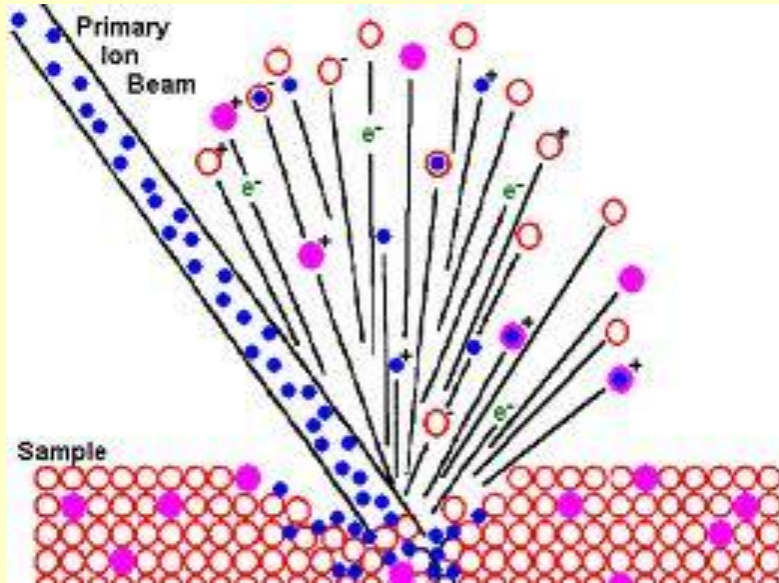

Sputtering (in the case of an intense ion beam)

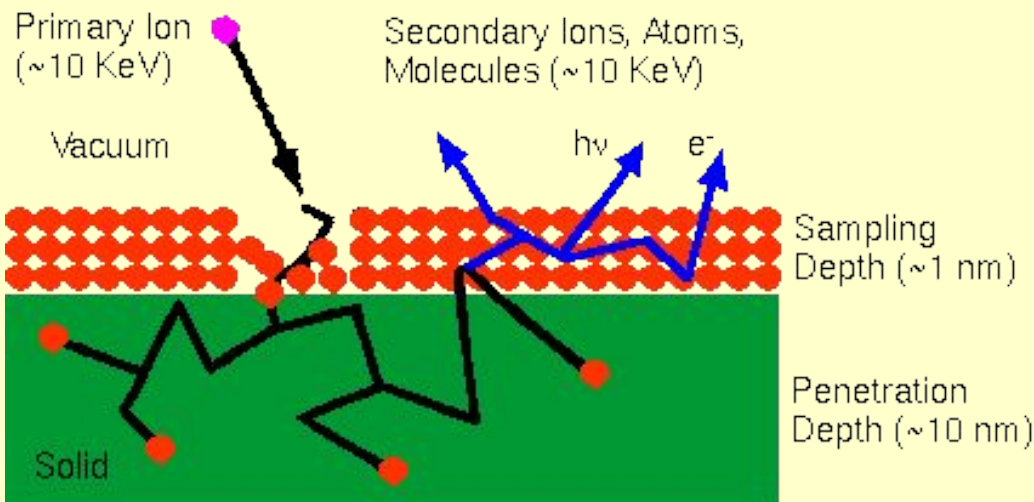

Effects of sputtering on the surface of the exposed material

Sputtering (3)

- Sputtering is produced when the impacting particles has an energy over the thresholds given by

$$E_{th} = \begin{cases} 8U \left(\frac{m_t}{m_i} \right)^{-1/3} & m_t / m_i < 3 \\ U [\gamma (1 - \gamma)] & m_t / m_i > 3 \end{cases}$$

$$\gamma = \frac{4 m_t m_i}{(m_t + m_i)^2}$$

where U is the binding energy of the target, m_t the mass of one of its particles, and m_i the mass of the impacting molecule.

Sputtering (4)

- The total flux of sputtered material is given by

$$\phi_{sp} = \sum_i \int_{E_{th,i}}^{\infty} Y_i(E) \phi_i(E) dE$$

$$Y_i(E) = Q_i \left(\frac{E}{E_{th,i}} \right)^{1/4} \left(1 - \frac{E_{th,i}}{E} \right)^{7/2}$$

where ϕ_i is the flux of impacting particles with energies in the bin E and $E+dE$. The sum is performed upon all the i impacting species.

Sputtering (5)

Target	Threshold energy for the impacting species (eV)					
	O	O ₂	N ₂	Ar	He	H
Ag	12	14	13	17	25	83
Al	23	29	27	31	14	28
Au	19	15	25	15	53	192
C	65	82	79	88	40	36
Cu	15	22	21	24	20	60
Fe	20	28	27	31	23	66
Ni	20	29	27	31	24	72
Si	31	39	37	42	18	40

Sputtering (6)

Target	Sputtering yield at 100 eV per impact (atoms/particle)					
	O	O ₂	N ₂	Ar	He	H
Ag	0.265	0.498	0.438	0.610	0.030	-
Al	0.026	0.076	0.060	0.110	0.020	0.010
Au	0.154	0.266	0.244	0.310	-	-
C	-	-	-	-	0.008	0.008
Cu	0.385	0.130	0.499	0.600	0.053	-
Fe	0.069	0.153	0.129	0.200	0.028	-
Ni	0.120	0.247	0.239	0.270	0.029	-
Si	0.029	0.054	0.046	0.070	0.023	0.002

High vacuum

- The exposure to the hard vacuum of space has deleterious effects for some materials
- The extremely low ambient pressure leads to outgas of certain materials (with a temperature dependence)

$$P \approx P_{\text{vapour}}$$

- Organic materials are more deeply affected than metals or alloys

Element	0.1 $\mu\text{m}/\text{yr}$	10 $\mu\text{m}/\text{yr}$	1 mm/yr
Cd	38	77	122
Zn	71	127	177
Mg	110	171	233
Au	660	890	950
Ti	920	1070	1250
Mo	1380	1630	1900
W	1780	2150	2480

Temperature needed (in Celsius) for a given evaporation rate

Contamination

- The outgassed matter from hot surfaces can be deposited onto cold surfaces, thus leading to their contamination:
 - Changes in the α/ε ratio. Thermal control problems
 - Degradation of optical surfaces. Mostly star trackers and telescopes
 - In extremely charged plasma environments, contaminants can be released in a flash discharge, thus enabling plasma effects
 - Contaminants can become polymerized, increasing its stickiness

The effects of vacuum exposure

- At 100 km in height the pressure is ~ 0.1 Pa, and at 350 km is $\sim 10^{-4}$ Pa.
- Solar UV flux: it is not filtered by the atmosphere and, due to its high energy, can degrade exposed surfaces

Molecular contamination

- All materials have a volatile component (on the surface, or dispersed on the structure).
- These molecules are emitted and travel along ballistic trajectories ($Kn \gg 1$).
- Substantial problems for optical devices, thermal control aggravated by possible polymerization by UV light

Mechanism	Activation energy	Temporal dependence
Desorption	1 – 10 kcal/mol	t^{-1} or t^{-2}
Diffusion	5 – 15 kcal/mol	$t^{-1/2}$
Decomposition	20 – 80 kcal/mol	NA

Molecular contamination

- The mass lost by diffusion (the most relevant input) can be expressed as

$$\dot{m} = \frac{q_0 \exp(-E_a / RT)}{t^{1/2}}$$

where E_a is the activation energy, R is the universal perfect gas constant, and q_0 is a reaction constant (experimentally determined)

- The total mass lost is (assuming that q_0 is time-independent)

$$\Delta m = 2q_0 \exp(E_a / RT) (t_2^{1/2} - t_1^{1/2})$$

Molecular contamination transport

- The amount of mass transferred to a specific point of the satellite from other surfaces of it depends on
 - The total mass outgassed
 - The geometry of the problem, expressed in terms of the visibility factor

$$VF_{1-2} = \iint \frac{\cos \theta \cos \phi}{\pi r^2} dA_1 dA_2$$

being A_1 and A_2 the emitter and receiver surfaces, respectively, and θ and ϕ the angles between dA_1 and dA_2

- Once all the VF have been determined, the rate of deposition is

$$\Phi = \sum_s VF_s m_s \frac{1}{\rho_s}$$

Molecular contamination deposition

- A molecule impacting a surface can get stuck for a characteristic time given by

$$\tau(T) = \tau_0 \exp(E_a / RT)$$

where $\tau_0 \sim 10^{-13}$ s.

- The thickness of contaminant increases as

$$X(t, T) = \gamma(T) \phi(t, T)$$


where $\gamma(T)$ is the sticking coefficient (worst case: $\gamma = 1$, typical case, $\gamma \sim 0.1$ at 300 K), and $\phi(t, T)$ is the arrival rate in $\mu\text{m/s}$.

ASTM E595


- This is a test to determine the Total Mass Loss (TML), the Collected Volatile Condensable Material (CVCM), and the Water Vapor Recovery (WVR) mass.
- A specimen is kept at 125 °C during 24 hours, near a collector surface kept at 25 °C. The mass lost by the specimen (TML) and the mass collected by the collector (CVCM) must comply stringent requirements for space qualification
- It is required that $Kn > 1$ inside the test chamber

The plasma environment

- At heights over ~100 km the radiation of the Sun ionizes the main constituents of the atmosphere, forming a neutral plasma

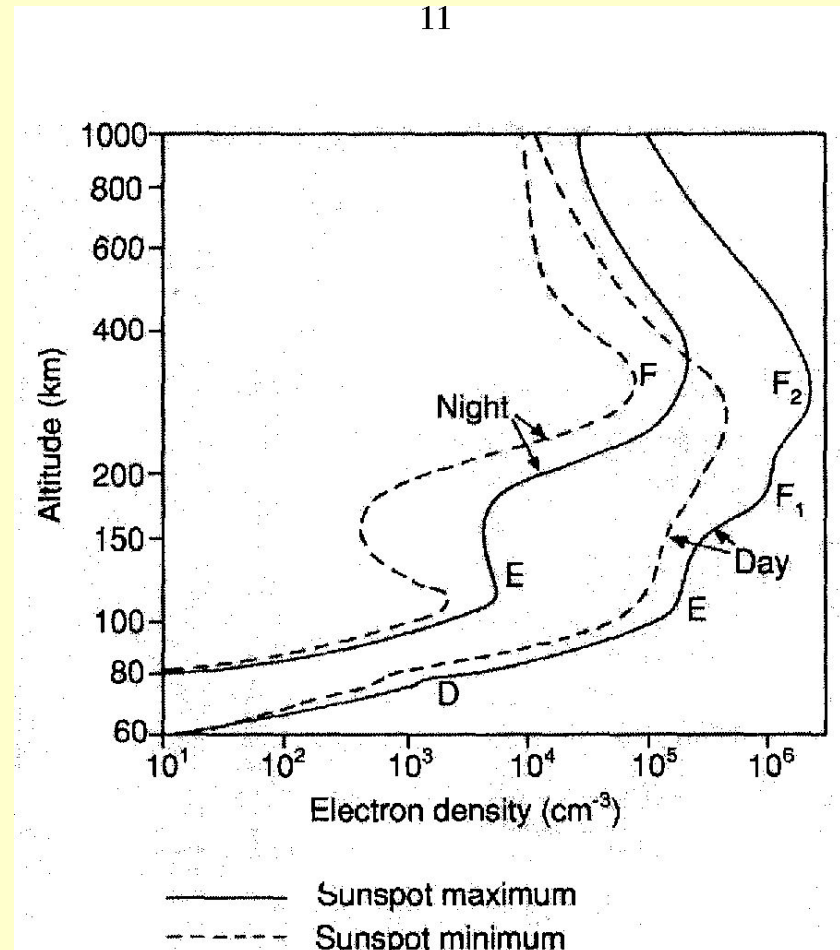

The plasma environment

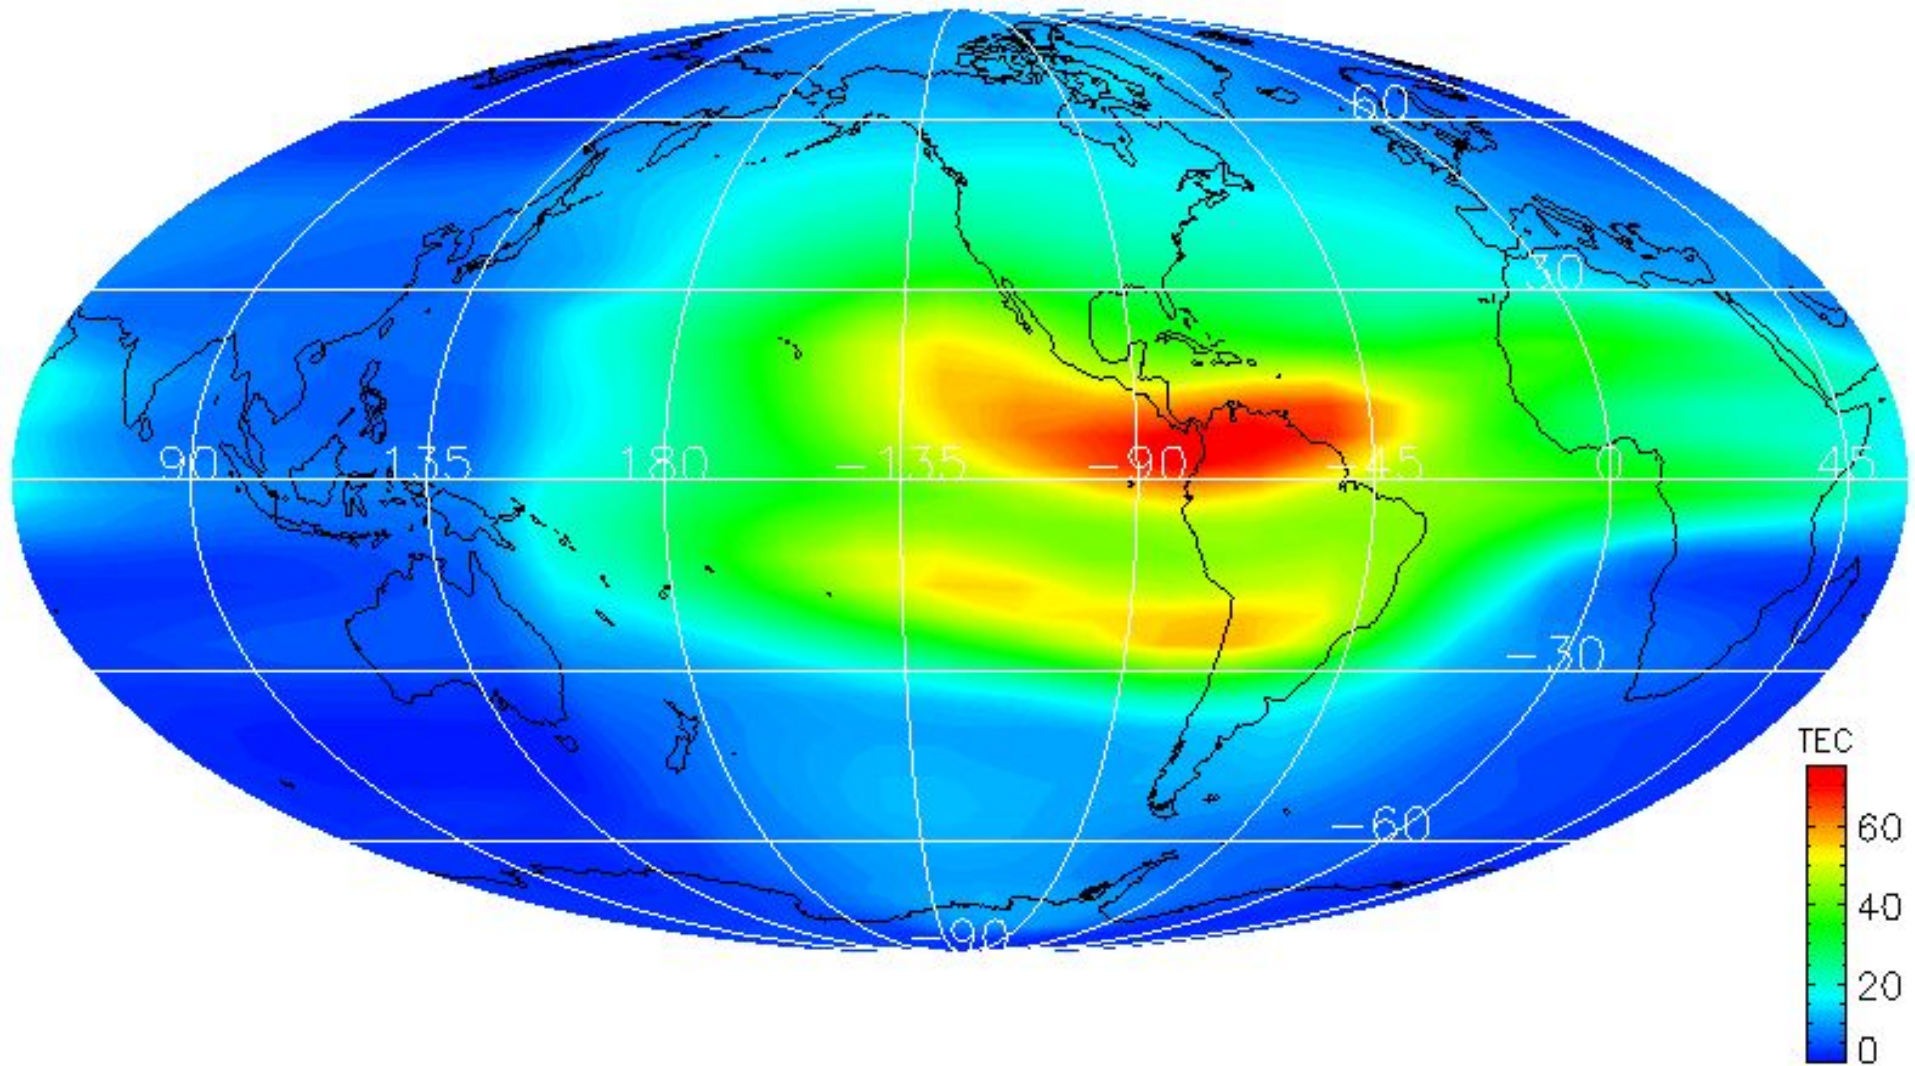

The plasma environment

- Plasma physics is based on the Maxwell equations plus Lorentz force:

$$\nabla \cdot \mathbf{E} = \frac{\rho}{\epsilon_0}$$

$$\nabla \cdot \mathbf{B} = 0$$

$$\nabla \times \mathbf{E} = -\frac{\partial \mathbf{B}}{\partial t}$$

$$\nabla \times \mathbf{B} = \mu_0 \mathbf{J} + \frac{1}{c^2} \frac{\partial \mathbf{E}}{\partial t}$$

$$\mathbf{F} = q(\mathbf{E} + \mathbf{v} \times \mathbf{B})$$

The plasma environment

- In the presence of a plasma, the electric potential becomes screened by the polarization of opposite charges. Then, it becomes

$$V(r) = \frac{1}{4\pi\epsilon_0} \frac{q}{r} \exp\left(-\frac{r}{\lambda_D}\right)$$

$$\frac{1}{\lambda_D^2} = \frac{1}{\lambda_e^2} + \frac{1}{\lambda_i^2}$$

$$\lambda_{e,i} = \left(\frac{\epsilon_0 k_B T_{e,i}}{n_0 e^2}\right)^{1/2} \approx 69 \left[\frac{T_{e,i}(\text{K})}{n_0(\text{m}^{-3})}\right]^{1/2}$$

where λ_D , λ_e , λ_i are the Debye longitude, and the Debye longitude for electrons and ions, respectively; n_0 is the plasma density.

Plasma oscillations

- This is a form of collective motion in which a small perturbation separates (at least in part) the opposite charges. There appears a restoring force, and the plasma oscillates with a frequency


$$\nu_{p,e} = \frac{1}{2\pi} \left(\frac{n_0 e^2}{\epsilon_0 m_e} \right)^{1/2} \approx 9 n_0^{1/2} (m^{-3})$$

This effect can cause electromagnetic perturbations to a satellite.

Spacecraft charging (1)

- Usually, a S/C subjected to an anisotropic flux of ions and electrons will acquire a net charge. In LEO we have

$$V_{th,i} < V_{orb} < V_{th,e}$$

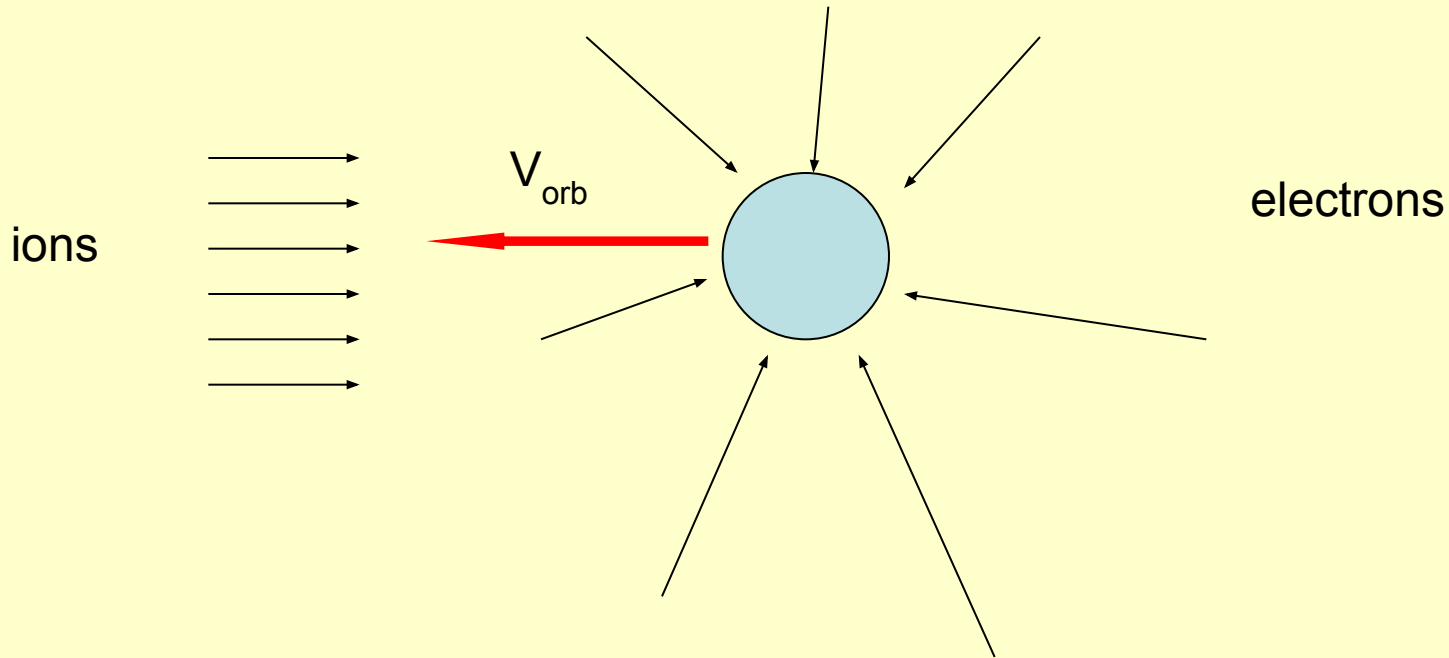

Spacecraft charging (2)

- Assuming that, both electrons and ions follow a Maxwellian velocity distribution, the currents of ions and electrons are given by

$$I_i = e n_0 v_{orb} A_i$$

$$I_e = \frac{1}{4} e n_0 \exp\left(\frac{eV}{k_B T}\right) v_{th,e} A_e$$

where $A_{e,i}$ are the cross sections of the satellite for electrons and ions, and the factor $\frac{1}{4}$ is due to the fact that half of the electrons escape from the Debye shell, and the rest have a $v \cos\theta$ towards the satellite.

- The charging process will continue until the satellite repels the incoming electrons. At this point, the satellite will be in the floating potential (in LEO, this is $\sim 1V$):

$$V_f = \frac{k_B T_e}{e} \ln\left(\frac{4 v_{orb} A_i}{v_{th,e} A_e}\right)$$


Radiation environment

- The radiation field has several components:
 - The standard solar wind plasma, formed by low energy protons, alpha particles, and electrons
 - The perturbed solar wind, with very high energy protons and electrons
 - Cosmic rays, composed of ultrahigh energy (up to 10^{15} eV) protons, alpha particles, electrons and very high energy, high Z elements (mostly iron)
 - Secondary particles resulting from the interaction of these components with the atmosphere: neutrons, muons, and pions



Galactic Cosmic Rays

- High energy particles coming from outside the Solar System
- Composition: 85% p, 14% α , 1% heavy ions
- Hard spectrum
- Fluxes and spectra are modulated by solar activity (GCR have maximum fluxes at minimum solar activity, and viceversa)

Galactic Cosmic Rays


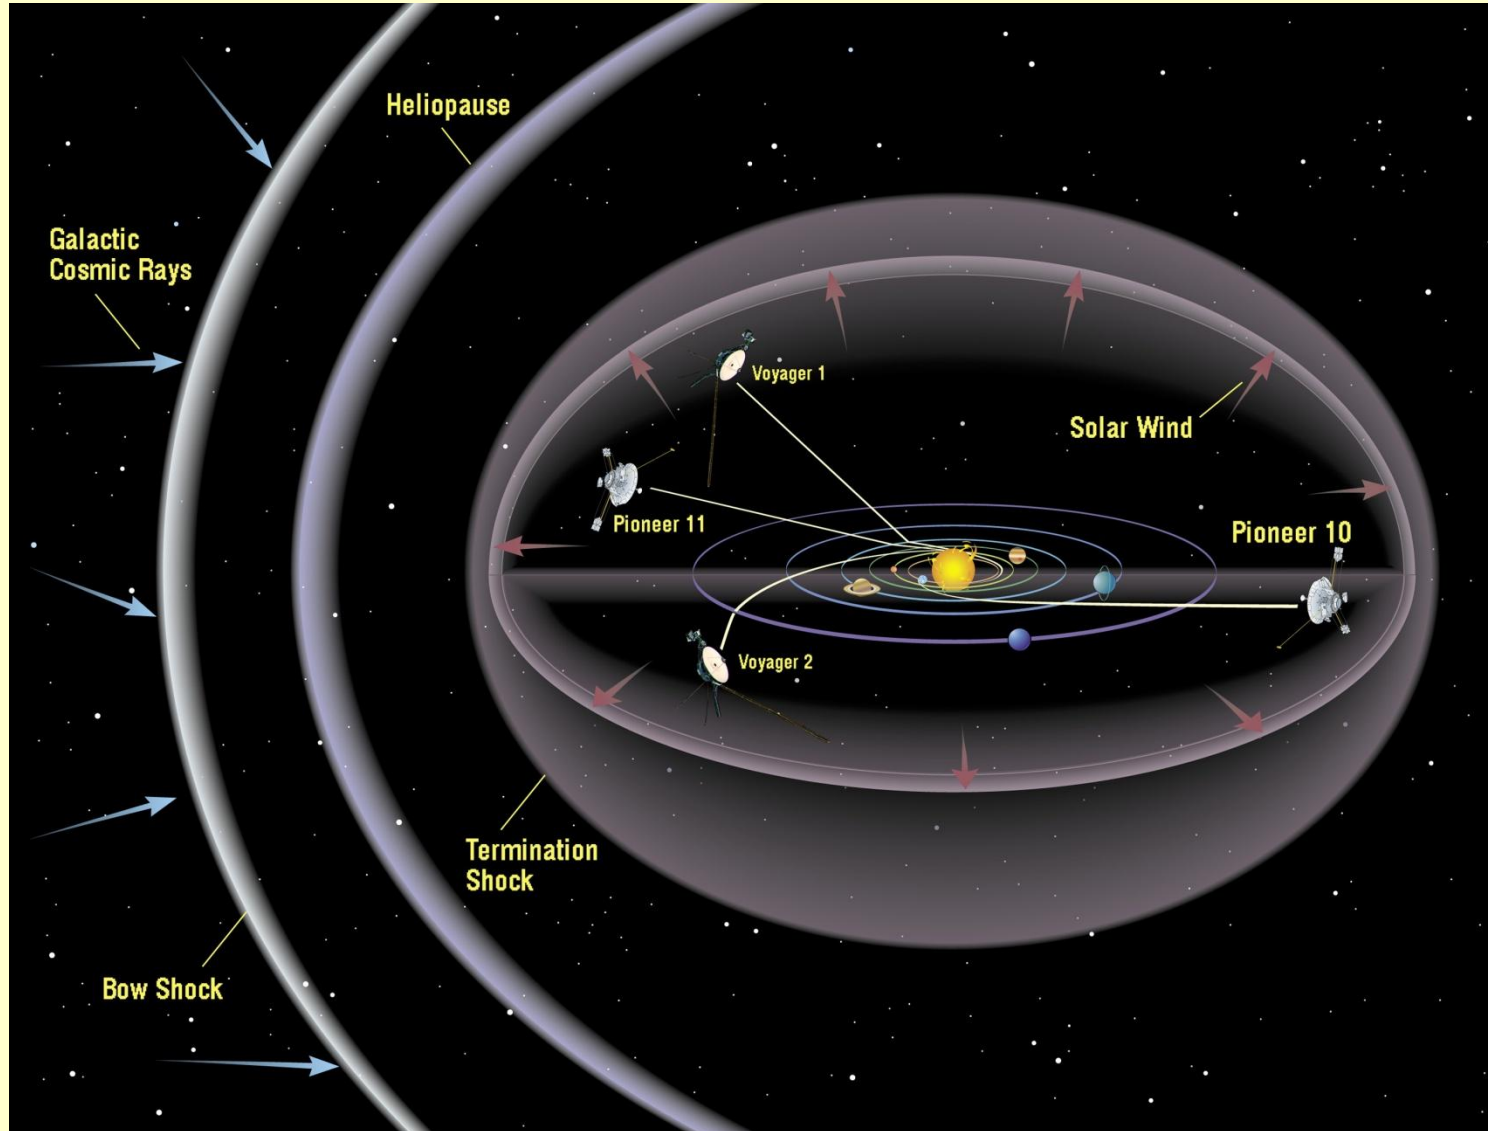


Galactic Cosmic Rays

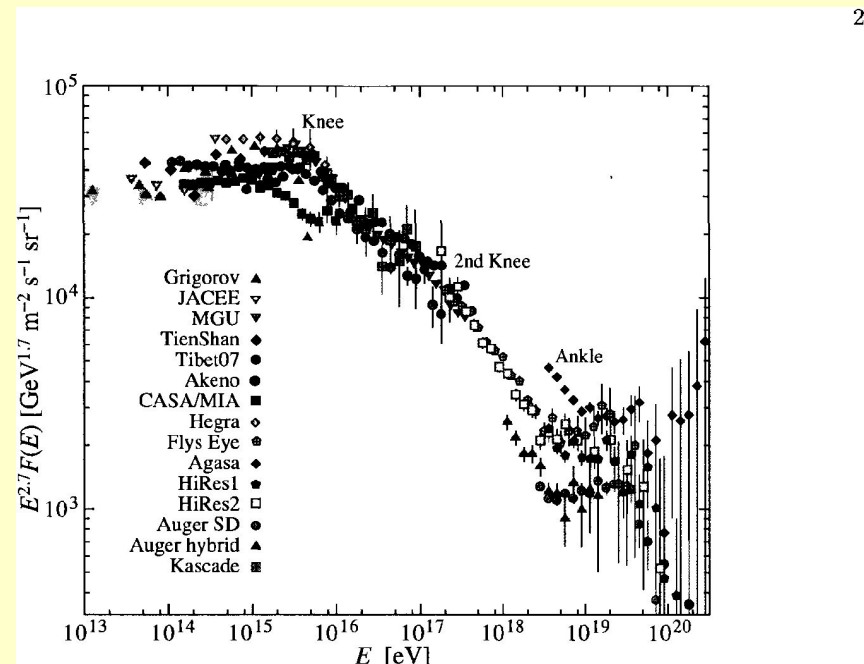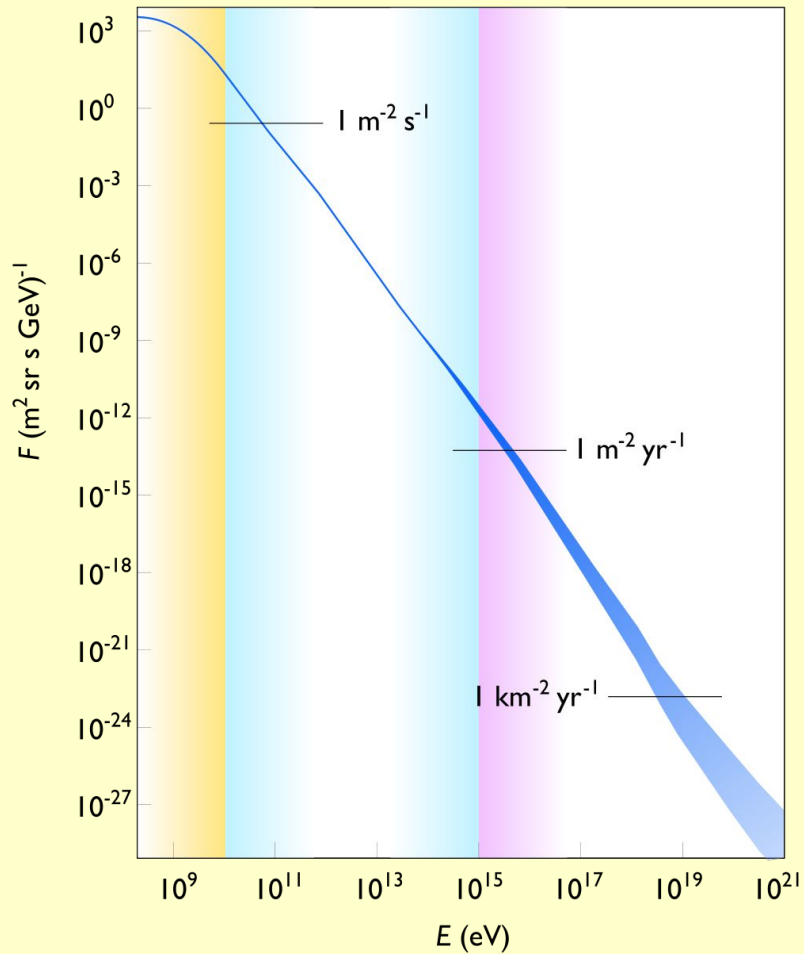


Hardness and survivability

- Single event effects: caused by the impact of a single high-energy particle.
- Single Event Upset (SEU): electron-hole pairs are formed in a sufficient number to change a logical state
 - No permanent damage to the device
 - Can generate false commands
 - Can be detected and corrected with software
- Single Event Latch-up (SEL): a conducting path establishes and anomalous current in the device
- Burn-out (SEB): reduced impedance in PNP devices can result in burn-out (a conducting path survives long enough to irreversibly damage the device)
- SEL and SEB typical of cosmic rays

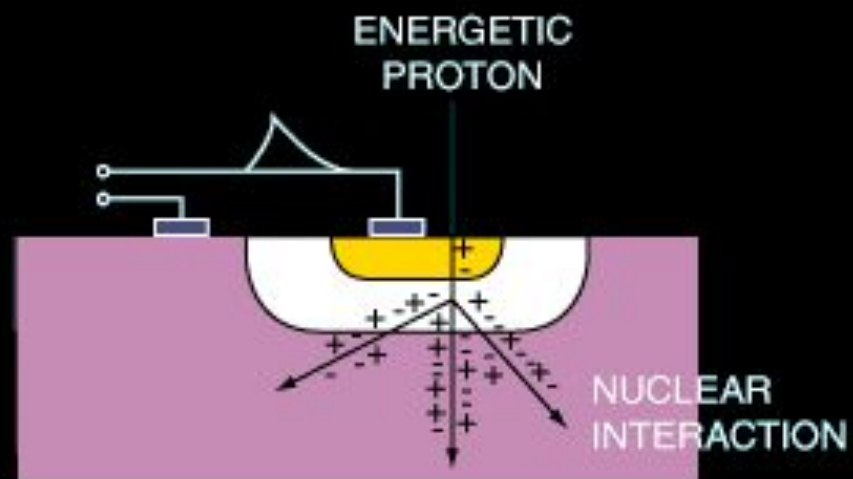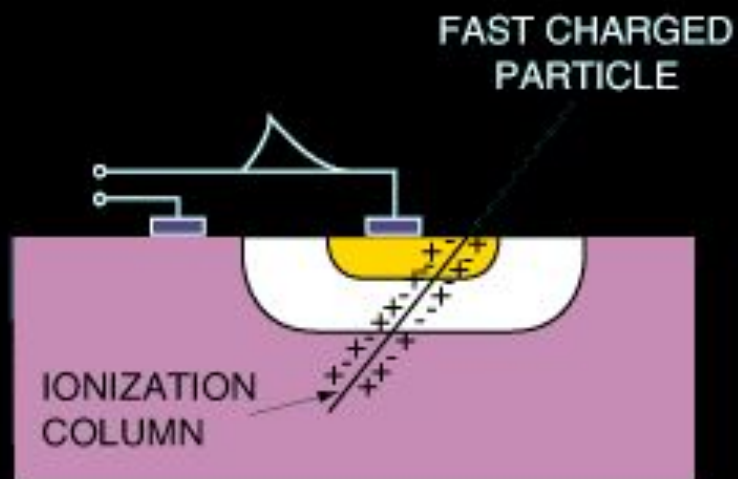


DEPLETION REGION 

1e-012s

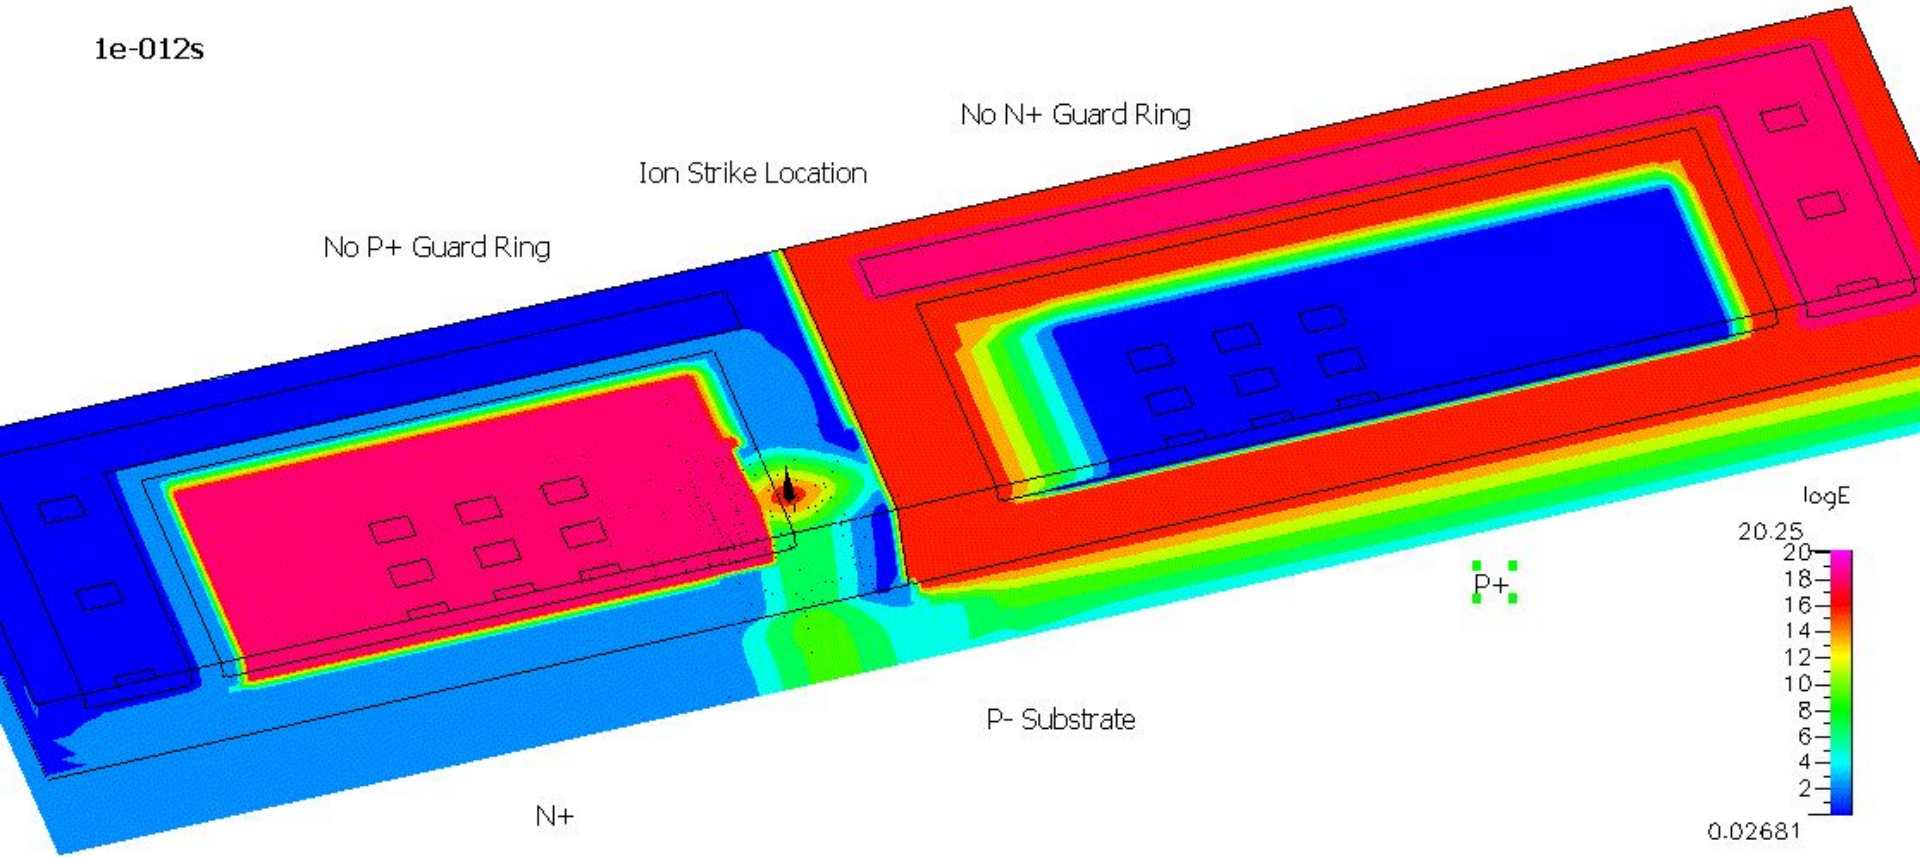

1e-012s

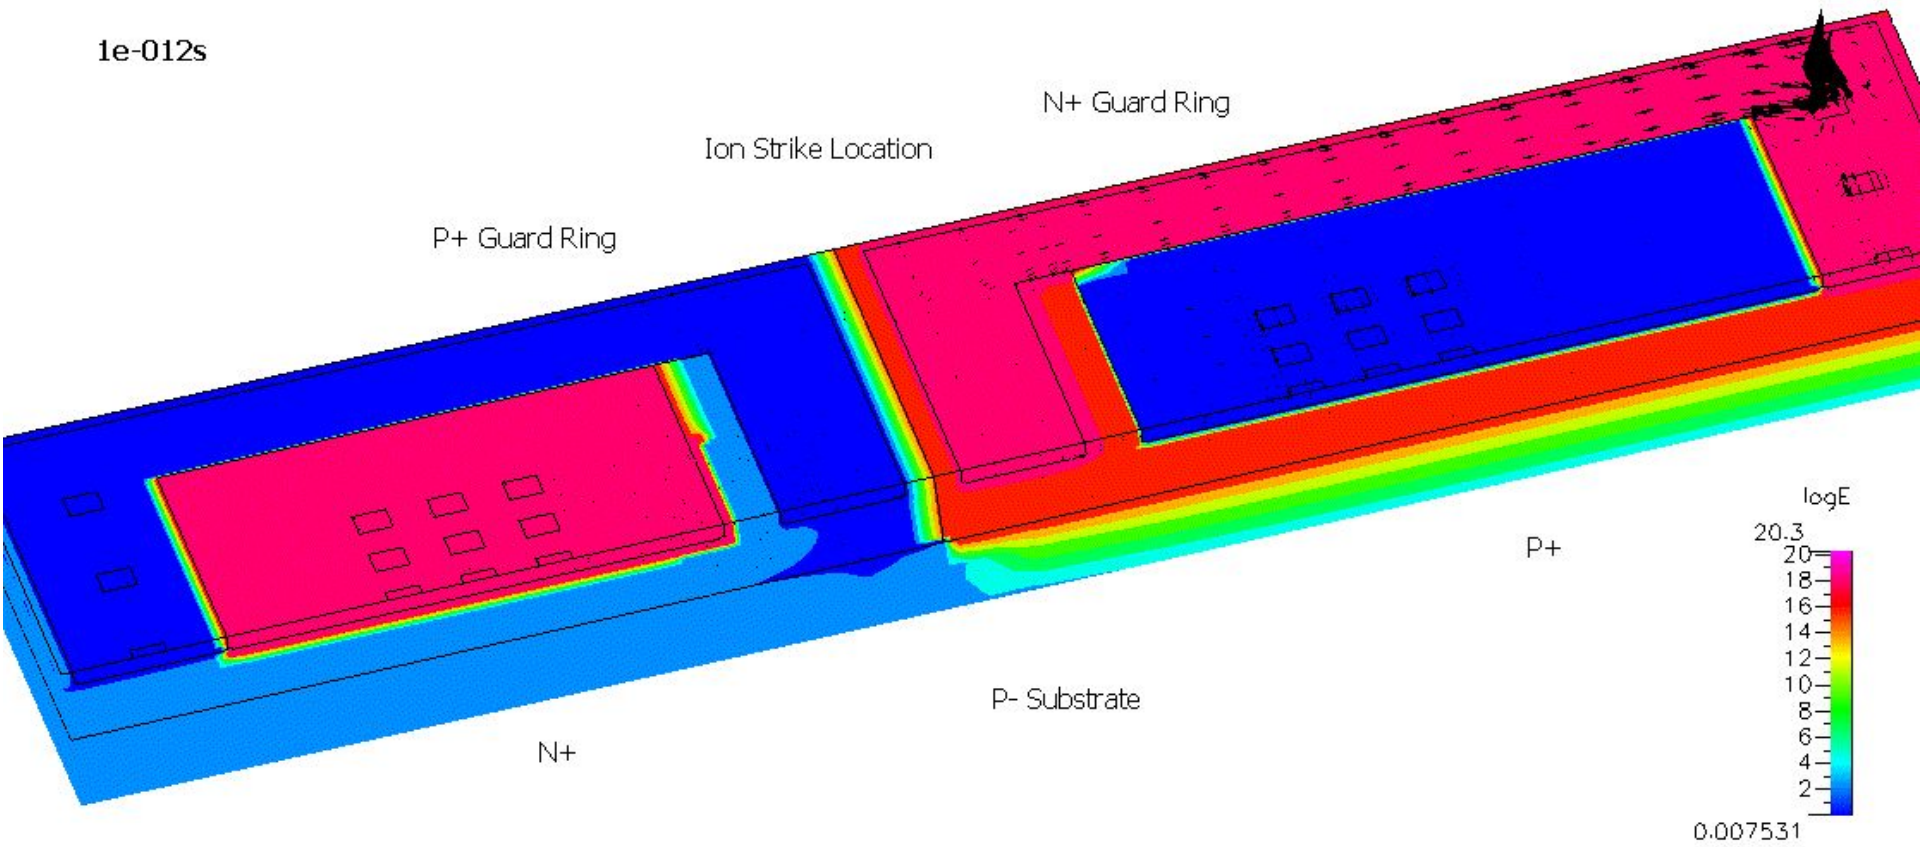

Radiation protection

- Charged particles can be readily stopped by almost any material, but they will emit most of its energy as a rain of secondary particles, including neutrons
- Neutrons and gamma rays, being neutral, are difficult to stop. They need low Z elements (Be and H are excellent choices)
- In order to avoid the high mass of the sandwiches Al/Be/Al (for example) NASA is experimenting with plastic substrates including a high amount of H. But the resistance of these organic materials to the space environment must be fully tested. This is the only possibility for small satellites

Physical Countermeasures

- Shielding with high-density material
 - Effective against primary radiation
 - Produces secondary radiation
 - Increases mass
- Chips on insulating substrates (instead of semiconductor wafers): Silicon Oxide (SOI) and Sapphire (SOI).
Increase the radiation hardness by orders of magnitude
- Chips on substrates with a high band gap: SiC and GaN
- Use of Magnetoresistive RAM (MRAM) or Static RAM (SRAM), which are more resistant to radiation

Software Countermeasures

- Error-Correcting Code (ECC):
 - Uses parity bits to identify alterations
 - Continuous reading of memory to identify altered bit chains
 - Increases processor overhead
- Redundant systems with majority voting
- Watchdog timer: it induces a hard reset if the processor does not produce a specific operation (as a write operation) at specific time intervals; if the operation is verified, the watchdog resets a time counter. It is a last resort solution.

Micrometeoroids (1)

- Micrometeoroids (and space debris) do not usually destroy a satellite, but in the long term can affect to the optical properties of their surfaces or to the efficiency of the solar cells
- Their effects can be classified as
 - Erosion
 - Penetration
 - Catastrophic effects

Micrometeoroids (2)

- The flux of micrometeoroids is given by

$$F(m^{-2} yr^{-1}) = 3.156 \times 10^7 (A^{-4.38} + B + C)$$

$$A = 15.0 + 2.2 \times 10^3 m^{0.306}$$

$$B = 1.3 \times 10^{-9} (m + 10^{11} m^2 + 10^{27} m^4)^{-0.306}$$

$$C = 1.3 \times 10^{-16} (m + 10^6 m^2)^{-0.85}$$

where m is the mass of the meteoroid in grams

- The Earth gravitationally focuses micrometeoroids

$$F_{grav} = 1 + \frac{R_{\oplus} + 100 \text{ km}}{R_{\oplus} + h}$$


Micrometeoroids (3)

- And also acts as a shield

$$F_{shield} = \frac{1 + \cos \eta}{2}$$


$$\eta = \sin^{-1} \left(\frac{R_{\oplus} + 100 \text{ km}}{R_{\oplus} + h} \right)$$

- Most impacts are produced on the space-facing surfaces

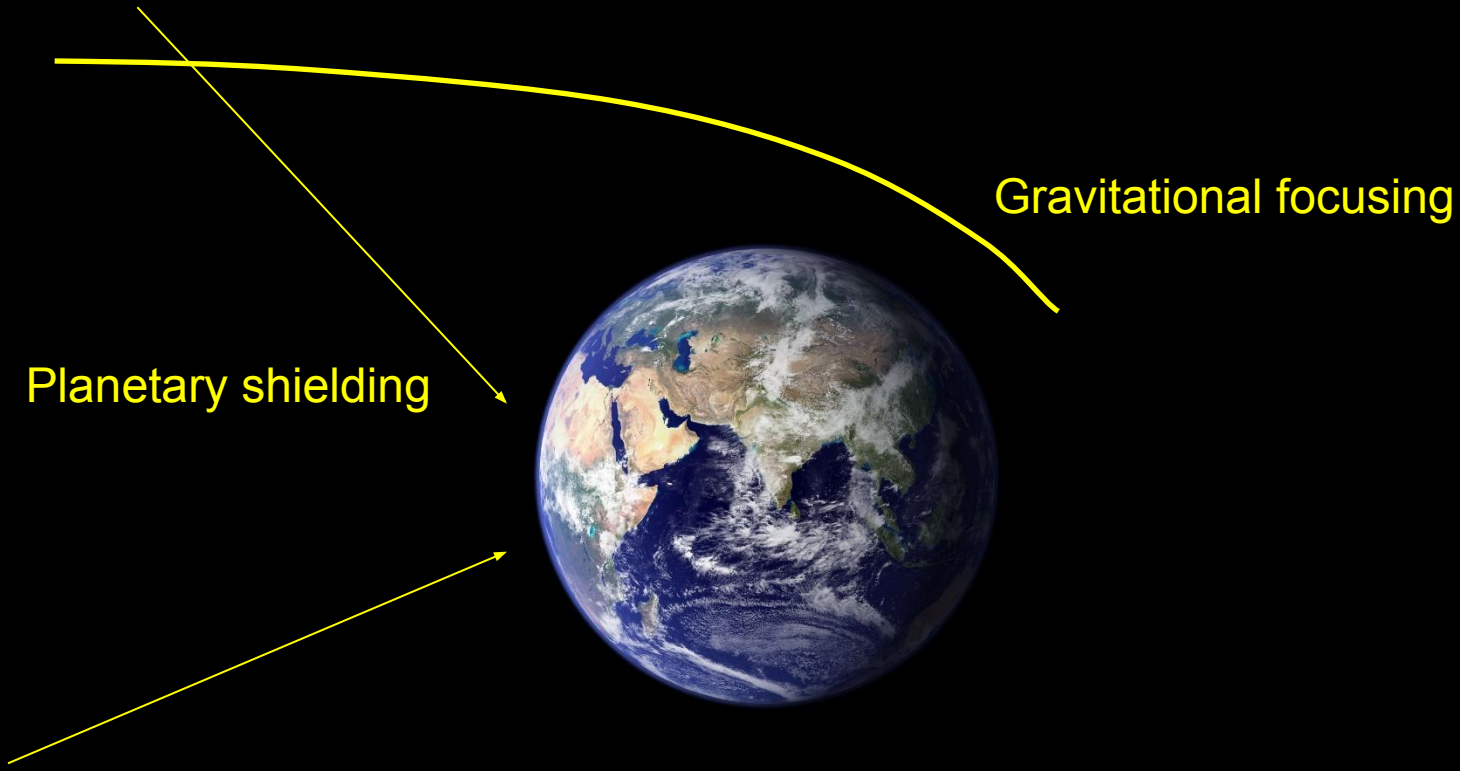

Planetary shielding

Gravitational focusing

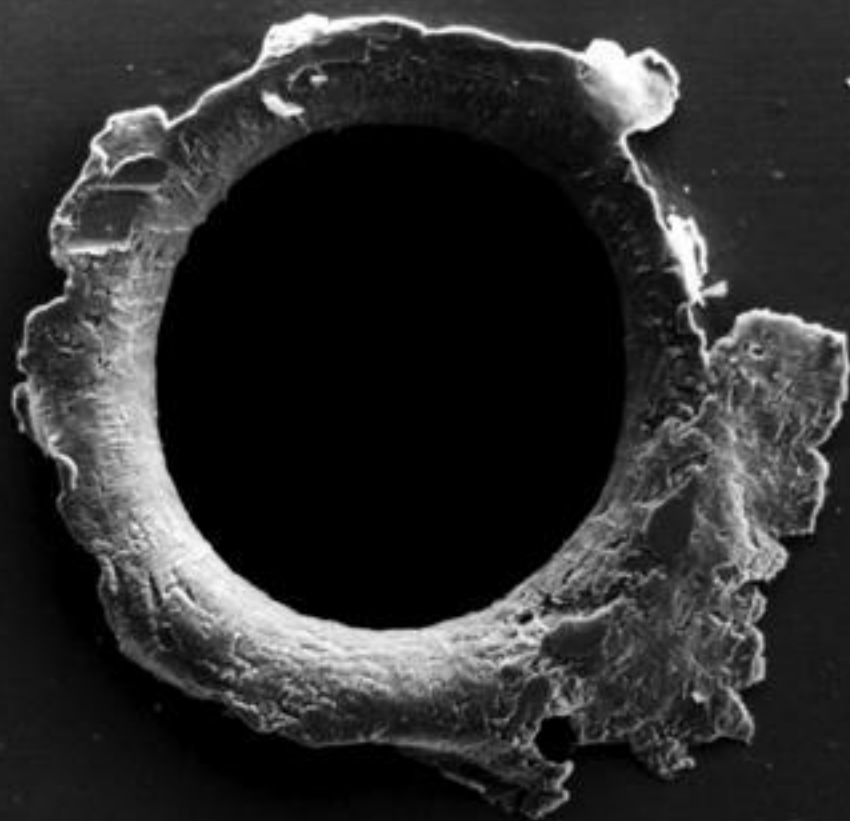

25KV X72

0028

100.0U NASA




Space debris (1)


- Space debris are produced by human activities in space
- They can be (among many other possibilities)
 - Inactive satellites
 - Rocket upper stages (sometimes with some fuels)
 - Pieces resulting from explosions –accidental or intentional– and collisions
 - Paint flakes
 - Chunks of nuclear reactor coolant
 - Small parts and/or tools
- The current limit for detection and follow-up is around 5 cm




Monthly Number of Cataloged Objects in Earth Orbit by Object Type

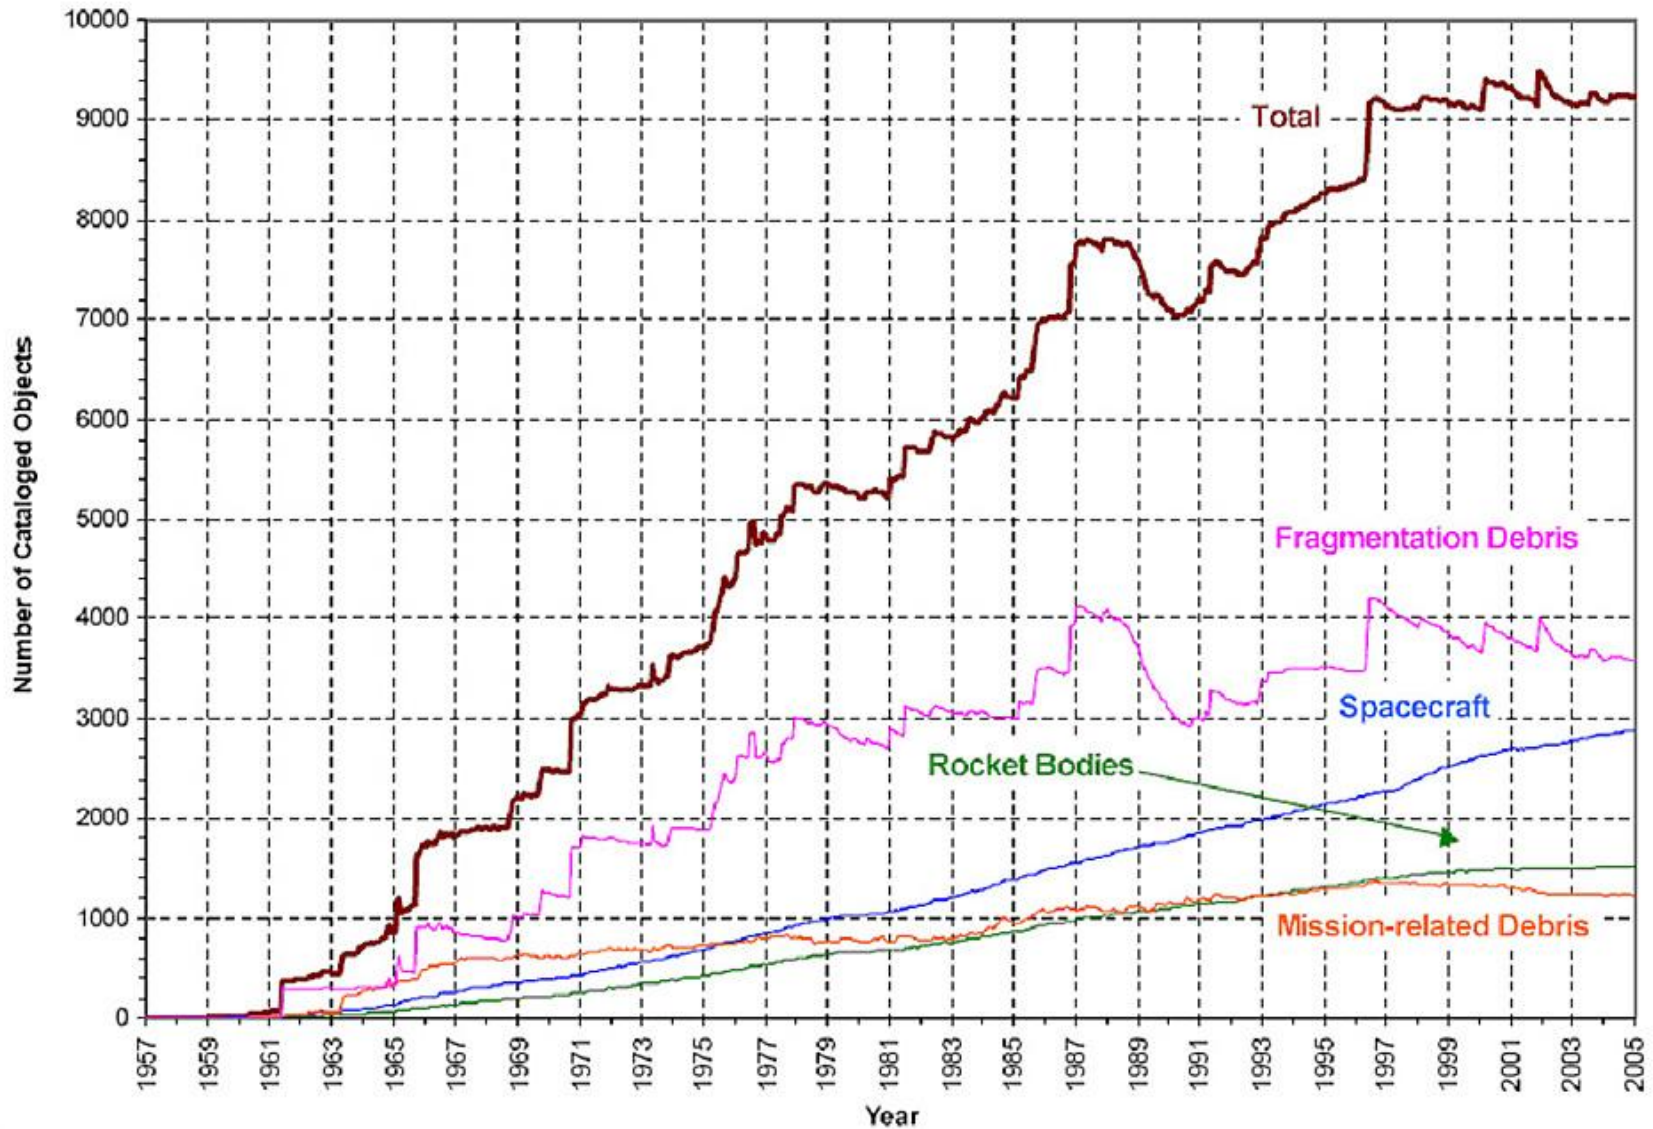

Monthly Number of Cataloged Objects in Earth Orbit by Object Type: This chart displays a summary of all objects in Earth orbit officially cataloged by the US Space Surveillance Network. "Fragmentation debris" includes satellite breakup debris and anomalous event debris, while "mission-related debris" includes all objects dispensed, separated, or released as part of the planned mission.

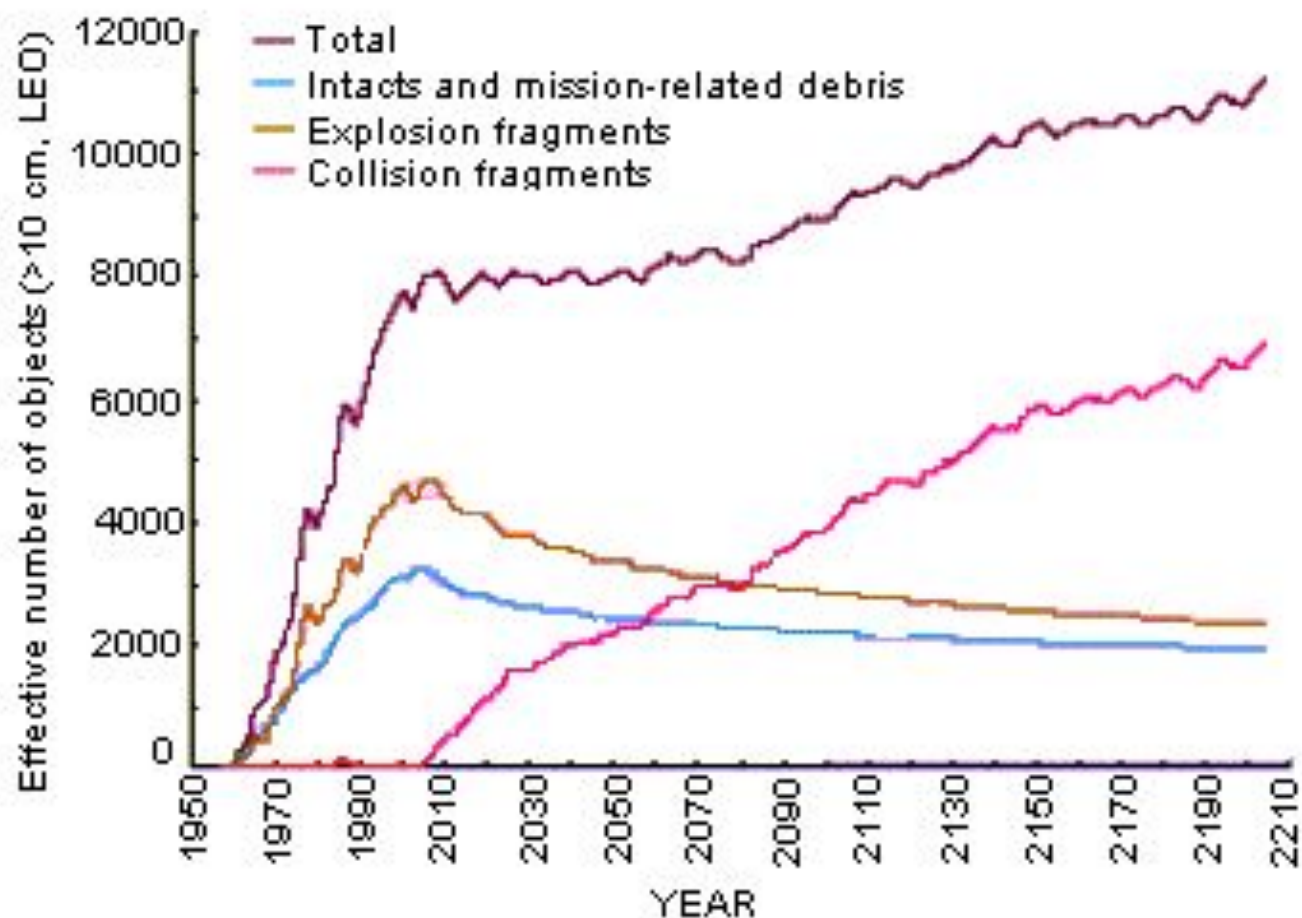

Growth of future populations. Effective number of LEO objects, 10cm and larger, from the LEGEND simulation. The effective number is defined as the fractional time, per orbital period, an object spends between 200 and 2000 km altitudes. Intacts are rocket bodies and spacecraft that have not experienced breakups.

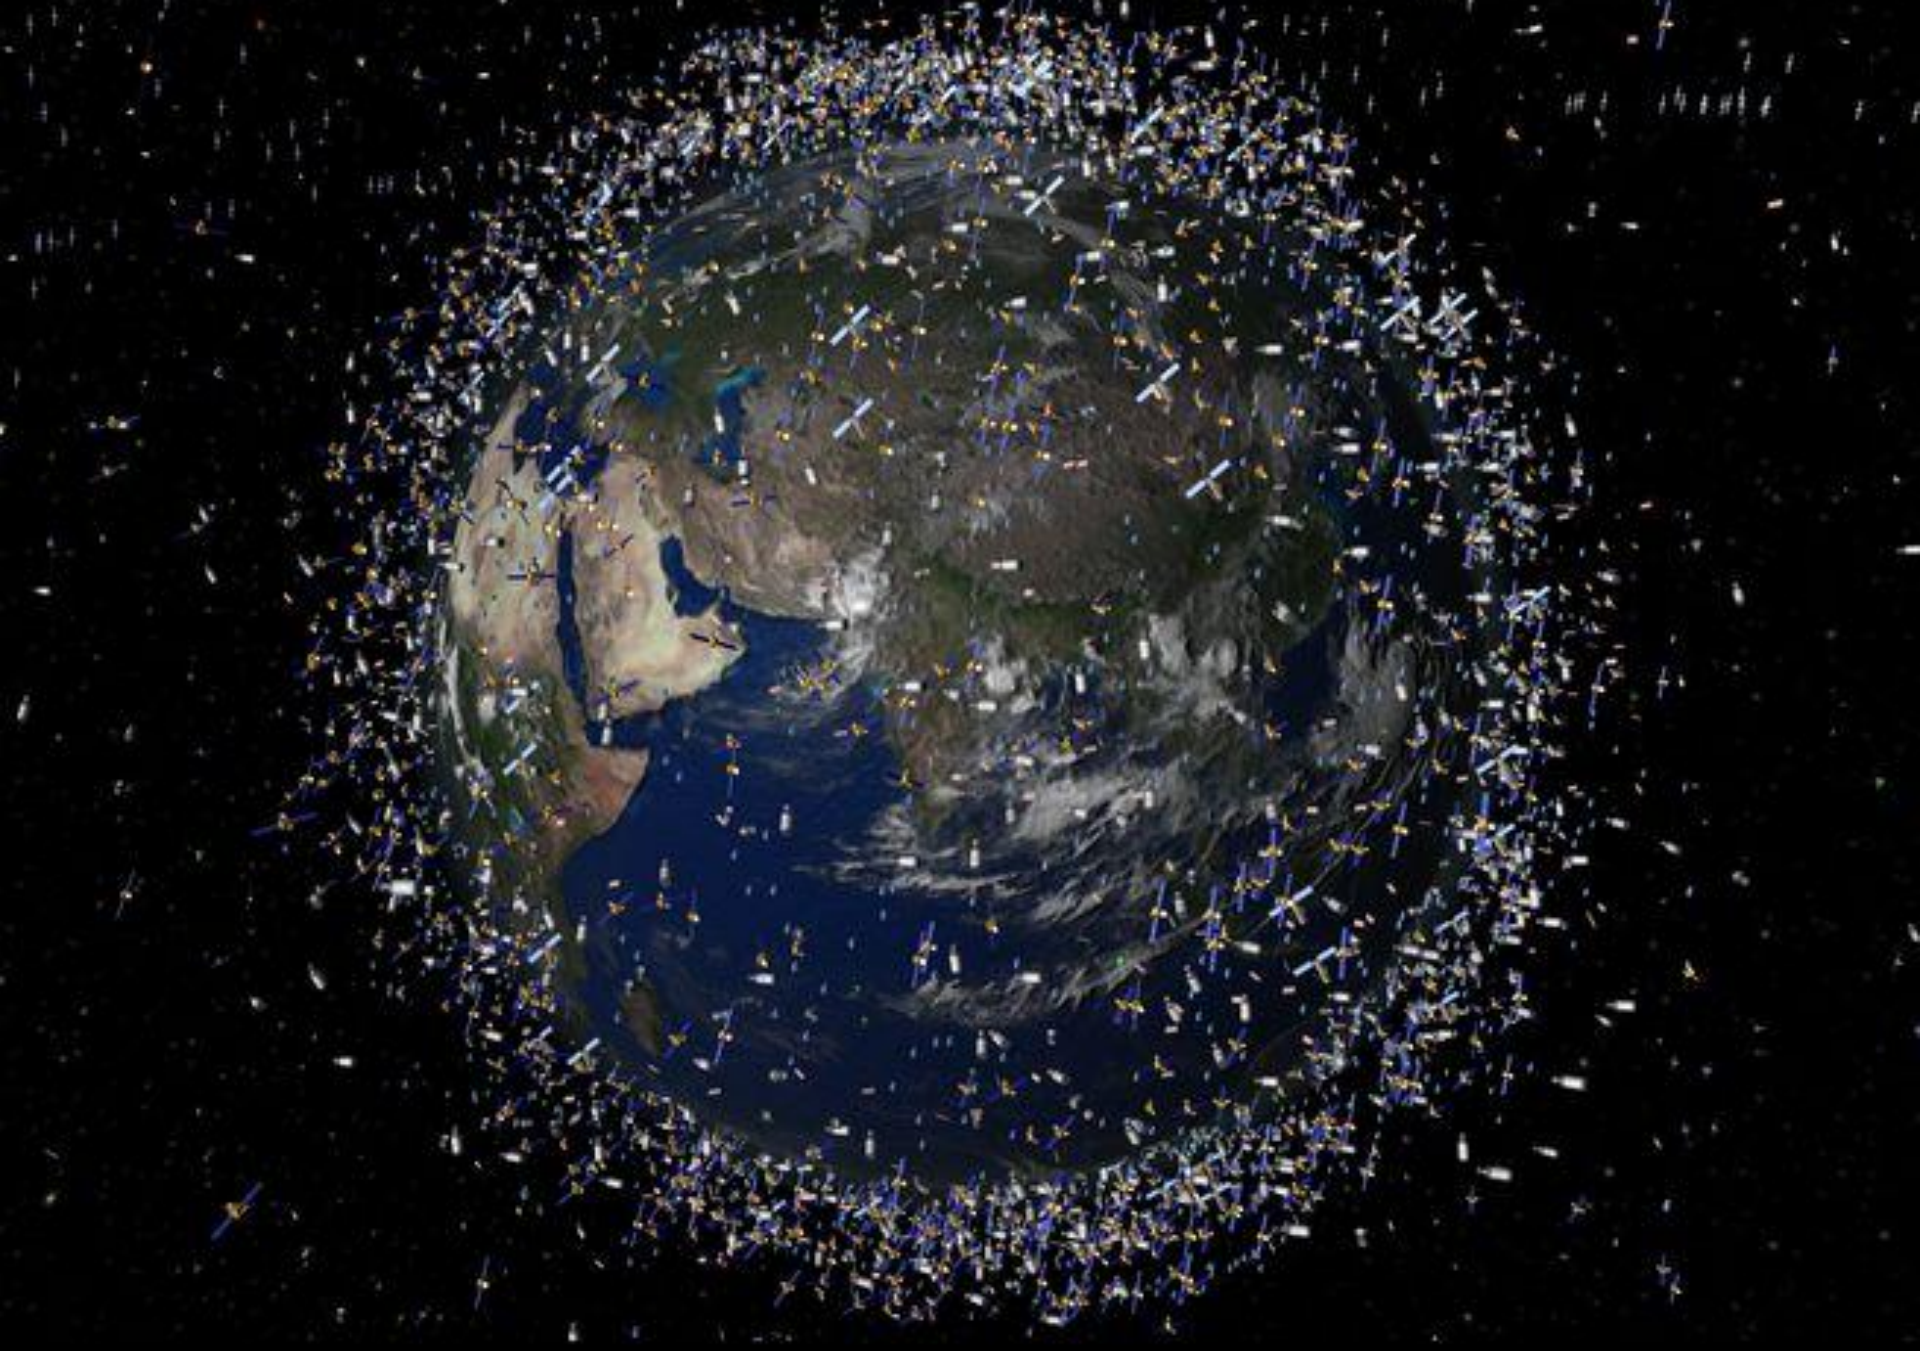

Note: Artist's impression; size of debris exaggerated as compared to the Earth

COSMOS_2251

Time (UTCG): 10 Feb 2009 16:55:38


Radial (km): -4.138

In-Track (km): 193.932

Cross-Track (km): -154.963


Range (km): 248.275

• Cosmos_2251

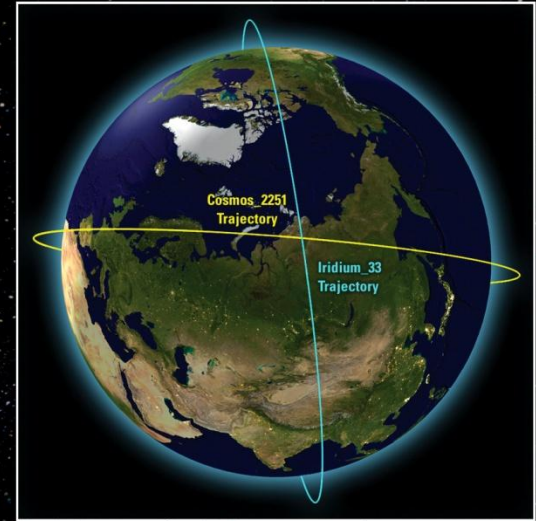

Growth of orbital space objects including debris

Number of objects

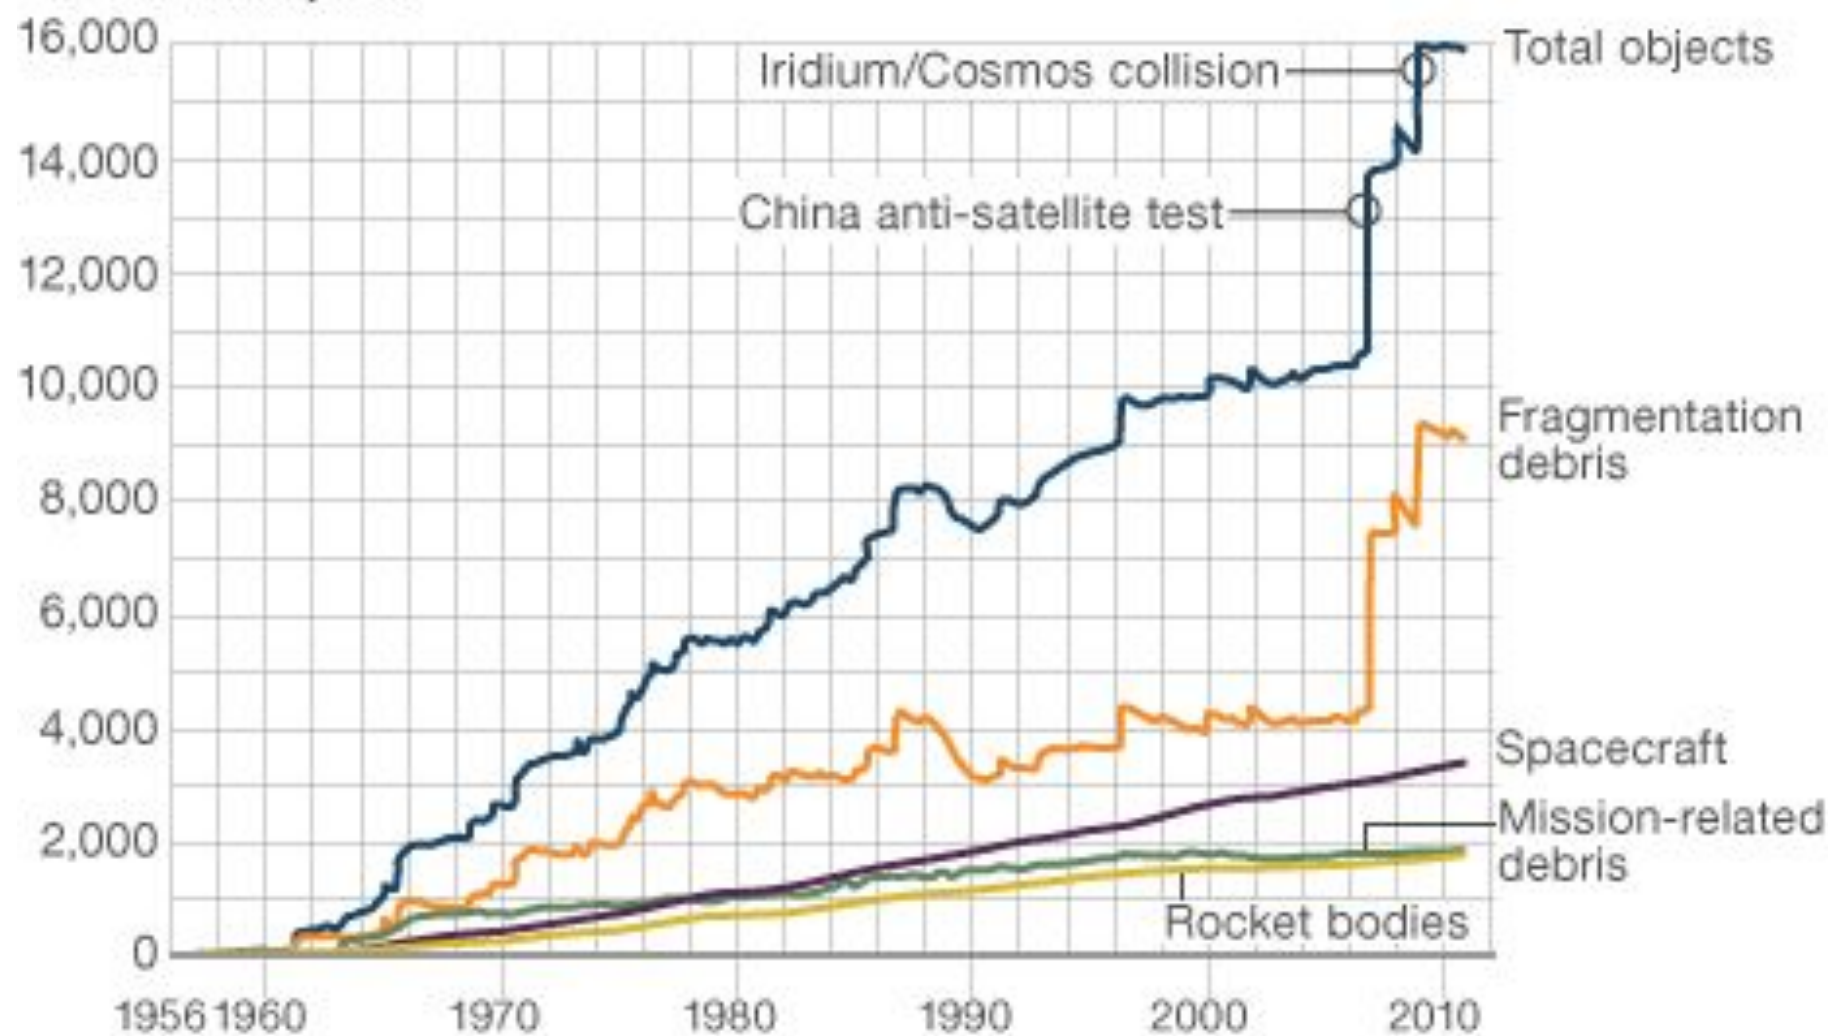

Source: Nasa

Space debris (2)

- Space debris at heights of less than 600 km reenter in the atmosphere in relatively short times (less than 3 or 4 years, depending on its BC)
- This problem is specially serious in LEO and GEO
- There are no effective countermeasures against the effects of micrometeoroids or space debris other than choosing low population orbits

Kessler syndrome

- It is possible that a series of collisions between space debris produces a cascade of smaller debris that would eventually cause a runaway effect on the number of debris
- This situation would be encountered if the debris density overcomes a (badly determined) threshold
- In a Kessler syndrome scenario, some orbital regions in LEO could become unusable
- Currently, the most affected orbits (and then the ones where a Kessler syndrome is more likely) include geostationary and Sun-synchronous (700 km in altitude) orbits

Our swarm as a space debris hazard

- A large swarm could be seen as a potential risk for other space agents
- The low BC and altitude warrants a lifetime of one week (perhaps 10 days) before re-entry
- At these low altitudes there are no satellites (except some intelligence ones on their perigee?)

SANDRA
BULLOCK

GEORGE
CLOONEY



DON'T LET GO

FROM DIRECTOR ALFONSO CUARÓN

GRAVITY

WARNER BROS. PICTURES PRESENTS

AN ESPERANTO FILMOJ/HEYDAY FILMS PRODUCTION AN ALFONSO CUARÓN FILM SANDRA BULLOCK GEORGE CLOONEY "GRAVITY" MUSIC BY STEVEN PRICE COSTUME DESIGNER JANY TEMIME VISUAL EFFECTS SUPERVISOR TIM WEBBER EDITORS ALFONSO CUARÓN MARK SANGER
PRODUCTION DESIGNER ANDY NICHOLSON DIRECTOR OF PHOTOGRAPHY EMMANUEL LUBEZKI, A.S.C., A.M.C. EXECUTIVE PRODUCERS CHRIS DE FARIA NIKKI PENNY STEPHEN JONES WRITTEN BY ALFONSO CUARÓN & JONÁS CUARÓN PRODUCED BY ALFONSO CUARÓN DAVID HEYMAN DIRECTED BY ALFONSO CUARÓN



gravity-movie.com

SEE IT IN REAL D 3D AND IMAX 3D

10.4.13



Debris Mitigation

The United Nations, through its Office for Outer Space Affairs, has set up a number of mitigation guidelines

1. Limit debris released during normal operations
2. Minimize the potential for break-ups during operational phases
3. Limit the probability of accidental collision in orbit
4. Avoid intentional destruction and other harmful activities
5. Minimize potential for post-mission break-ups resulting from stored energy
6. Limit the long-term presence of spacecraft and launch vehicle orbital stages in the low-Earth orbit (LEO) region after the end of their mission
7. Limit the long-term interference of spacecraft and launch vehicle orbital stages with the geosynchronous Earth orbit (GEO) region after the end of their mission

References

General references

- Alan C. Tribble, *The Space Environment*, Princeton University Press (2003)
- Vincent L. Pisacane, *The Space Environment and its Effects on Space Systems*, AIAA Education Series (2008)

Space Physics Standards

- SPENVIS (www.spervis.oma.be)
- ECSS (www.ecss.nl)

Geomagnetic field

- Thébault, E., et al., International Geomagnetic Reference Field: the 12th generation, *Earth, Planets, and Space*, **67**, 79 (2015)

Materials data

- Outgassing data: outgassing.nasa.gov
- Campbell, W. A. Jr., & Scialdone, J. J., *Outgassing Data for Selecting Spacecraft Materials*, NASA Reference Publication 1124, Revision 3, (1990)

References

Atomic Oxygen Erosion

- Zhan, Y., & Zhang, G., Low Earth orbit environmental effects on materials, *Aerospace Materials & Technology*, issue 1, 1–5 (2003)

Radiation and its Effects

- Durante, M., & Cucinota, F., Physical basis of radiation protection in space travel, *Reviews of Modern Physics* **83**, 1245 – 1281 (2011)

Atmospheric Drag

- King-Hele, D. G., *Satellite Orbits in an Atmosphere. Theory and Application*, Blackie and Son, 1987
- Gaposchkin E. M., & Coster, A. J., Analysis of Satellite Drag, *The Lincoln Laboratory Journal* **1**, 203–224 (1988)
- N.X. Vinh, J.M. Longuski, A. Busemann, R.D. Culp, Analytic theory of orbit contraction due to atmospheric drag, *Acta Astronautica* **6**, 697–723 (1979)

References

Micrometeoroids

- Zhan, Y., & Zhang, G., Low Earth orbit environmental effects on materials, *Aerospace Materials & Technology*, issue 1, 1–5 (2003)

Space Debris

- UN, *Space Debris Mitigation Guidelines of the Committee on the Peaceful Uses of Outer Space*, United Nations Office for Outer Space Affairs (2010)
- Levin, G., First International Workshop on Space Debris, *Space Forum* **1** (1995)