

CiGe

Update firmware Using the tutorial

Step 2

- Open “BeTools.exe”

Drivers	2016/11/5 1:19	文件夹	
Language	2016/11/5 1:20	文件夹	
res	2016/11/5 1:20	文件夹	
ScaHardward	2016/11/5 1:20	文件夹	
7z.dll	2013/8/21 10:48	应用程序扩展	597 KB
7z.exe	2013/8/21 10:48	应用程序	144 KB
aapt.exe	2013/8/21 10:48	应用程序	835 KB
adb.exe	2013/8/21 10:48	应用程序	796 KB
AdbWinApi.dll	2013/8/21 10:48	应用程序扩展	94 KB
AdbWinUsbApi.dll	2013/8/21 10:48	应用程序扩展	60 KB
Authentication.dll	2015/3/26 19:18	应用程序扩展	156 KB
AutoGen.dll	2014/7/17 11:48	应用程序扩展	48 KB
BeTool.pdf	2015/10/19 14:27	WPS PDF 文档	5,010 KB
BeTools.chm	2015/10/19 14:34	编译的 HTML 帮...	1,555 KB
BeTools.doc	2016/1/18 15:50	Microsoft Word ...	7,343 KB
BeTools.exe	2016/1/26 10:31	应用程序	5,669 KB
BeTools.ini	2016/10/5 16:37	配置设置	1 KB
BeTools_en.ini	2015/5/16 11:36	配置设置	1 KB
BeTool测试用例.xlsx	2014/11/6 10:15	Microsoft Excel ...	24 KB

Step 3

- Choose 离线注册

登录 BeTools

在线登录

用户名:

密码:

记住密码 自动登录

离线注册

Step 4

- Open

The image shows a dialog box titled "登录 BeToolsS" (Login BeToolsS). It has two main sections: "在线登录" (Online Login) and "离线注册" (Offline Registration). The "Offline Registration" section is selected with a radio button. In this section, there are two buttons: "保存机器码" (Save Machine Code) and "打开注册文件" (Open Registration File). The "保存机器码" button is next to a text field containing the alphanumeric string "TNRGQGQQAATAAQIFAAAZBRZR". The "打开注册文件" button is next to an empty text field. A red arrow points to the "打开注册文件" button. At the bottom of the dialog, there are two buttons: "登录" (Login) and "退出" (Exit). Above the dialog, a separate button labeled "打开注册文件" (Open Registration File) is shown, which is the button being referred to in the "Open" instruction.


Step 6

- Choose




Step 7

- Open

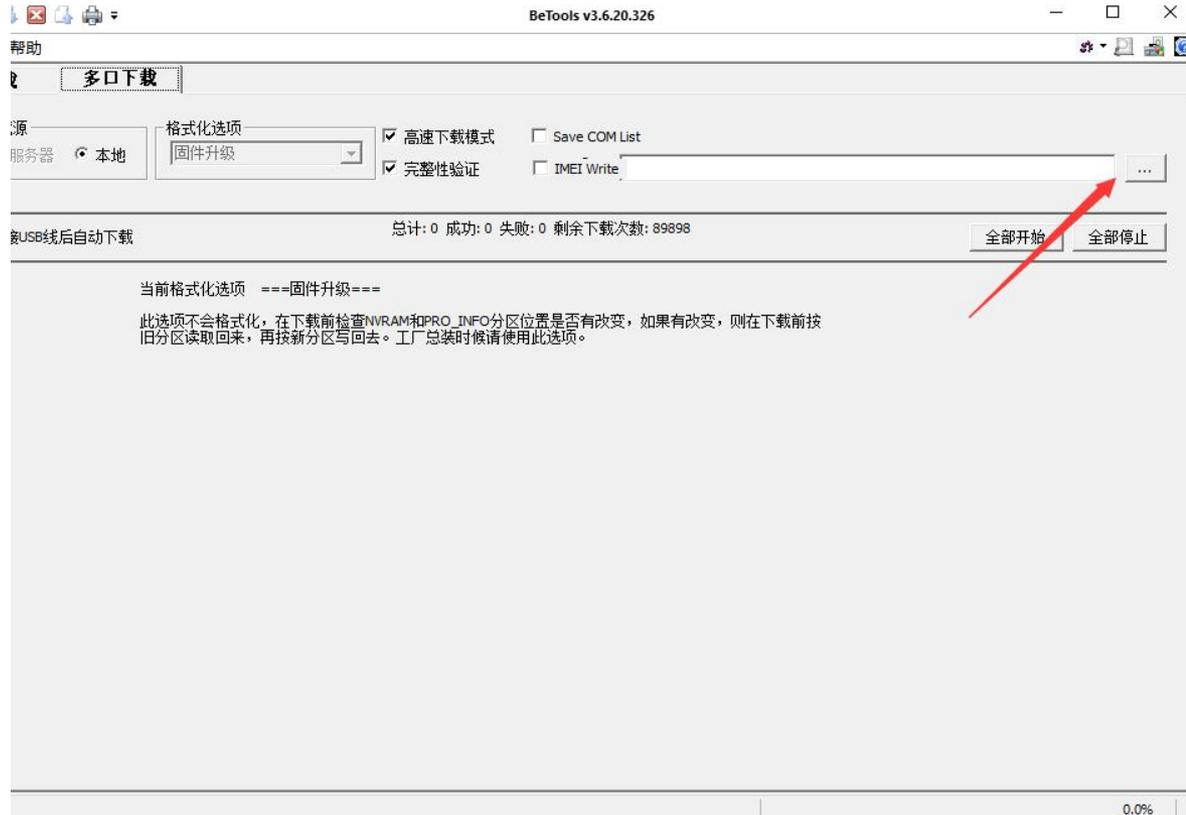

Step 8


- Open firmware file folder , Choose “.....sca” file

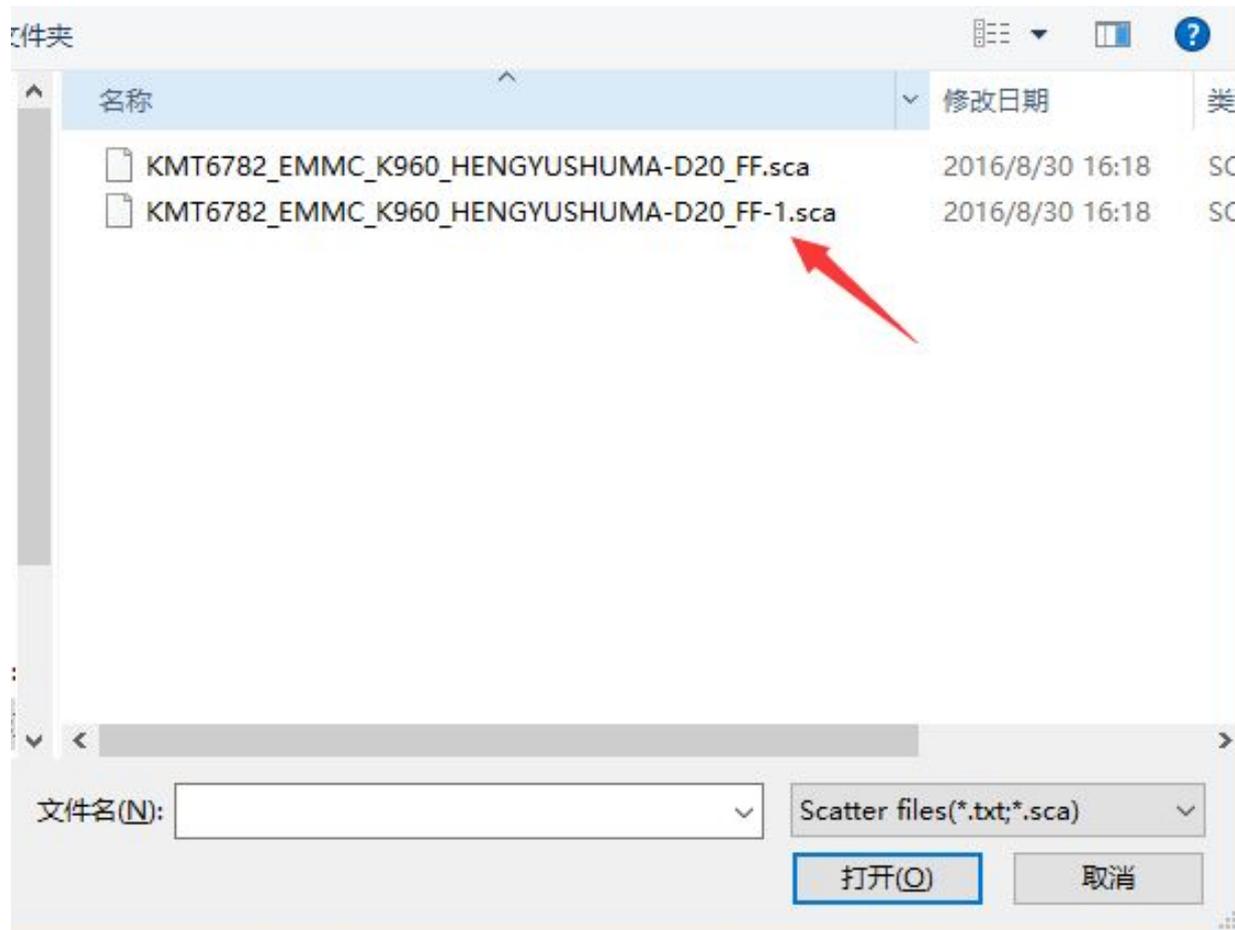

Step 9

- 1. Turn off your tablet
- 2. Use USB connected to the compute
- 3. The system automatically upgrades

Upgrading...

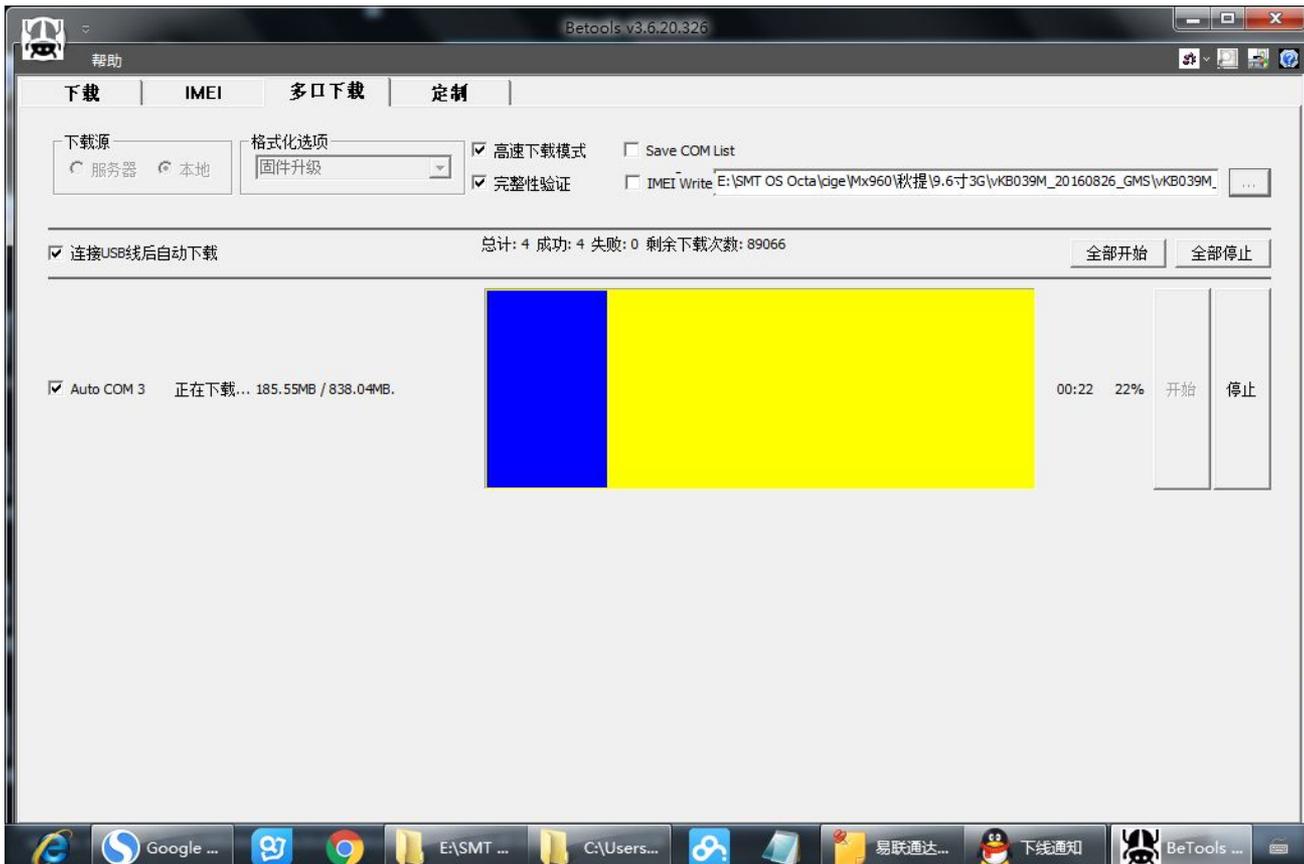

Step 10

- Unplug the USB, according to open the key switch on.
- After firmware are chosen for the tablet was turned off, use USB connected to the computer, the computer will automatically install the tablet driver (shown in the lower right corner, if prompted to install successfully, the computer can support to upgrade the tablet, if prompted to install is not successful, the computer does not support to upgrade the tablet computer, need to change a computer to operate or computer reinstall Windows 7 or Windows XP operating system), driver installation, system will automatically jump to upgrade section, start is to display the blue, wait for good upgrade, will become white or green (i.e., upgrade to 100% of the time), you can unplug the USB, according to open the key switch on.

Instructions 1

- if tablet PC boot is not normal display
 , please at “step 8” Re-select other the
 “.....sca ”file

Instructions 2

- Press the reset button to confirm the device is turned off

