

P770 Disassembly guide

Contents

- 1. Disassembly tool
 - 2. Phone structure
- 3. Follow chart
 - 4. Explosive view





1. Disassembly tools

- ①crossing screwdriver
- With the second second

2tweezer



3crowbar



4chip



Santi_static wrist




- 1. Take proper anti-static measures: put on anti-static wrist/gloves and wear proper anti-static clothes.
- 2. Prepare disassembling tools: metal forceps, cross screwdriver, crowbar, electric iron.

2. Phone structure

Front view




Rear view

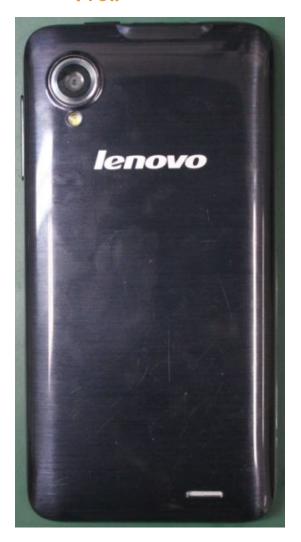

3. Follow chart of Disassembling

Follow chart

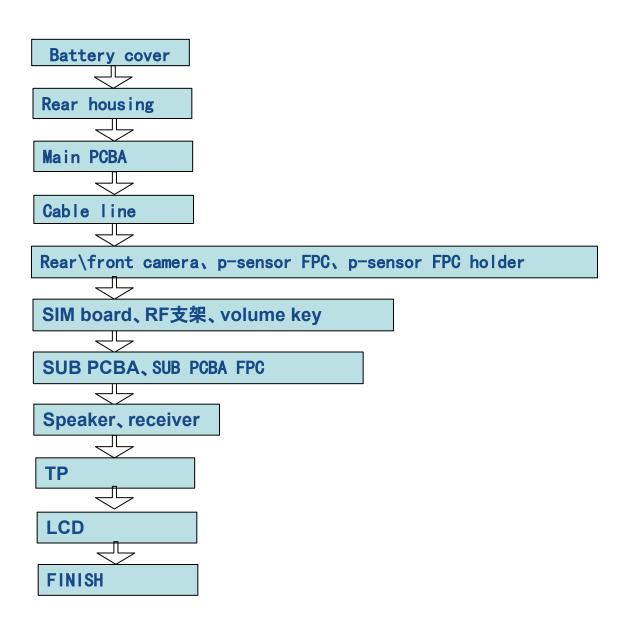

lenovo 联想移动 客服技术支持处

联想机密 联想机密 联想机密

- 4. Disassembly steps
 - Attention

Before the disassembly of P770:

- 1. Be sure that it's powered off
 - Take out SIM and TF card

Assembly

Reinstate to the condition before disassembly.

Step1: battery cover





联想机密 联想机密

Step2: Rear housing

1. Loosen and take down the screws





联想机密

联想机密 联想机密

Step2: Rear housing



lenovo 联想移动 客服技术支持处

联想机密


联想机密 联想机密

USB and

earphone connector

• Step3: Main PCBA


1 Loosen screws

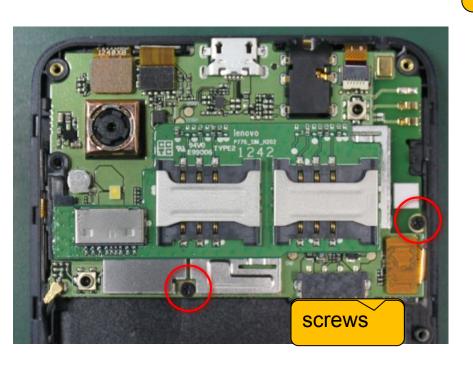

Front camera

P-SENSOR FPC

TP FPC

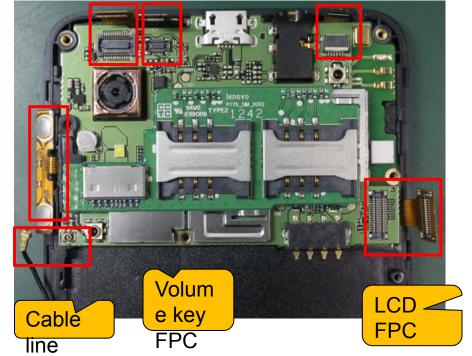


lenovo 联想移动 客服技术支持处


联想机密 联想机密

Step3: Main PCBA


Loosen buckle

Loosen SUB PCBA FPC

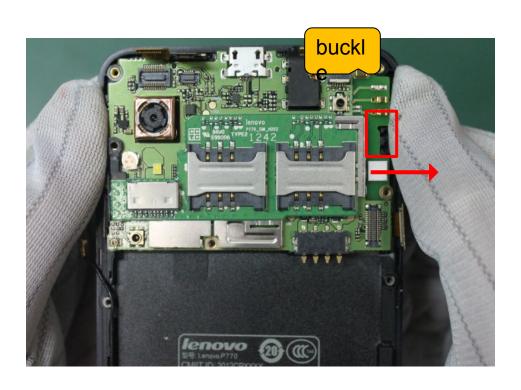

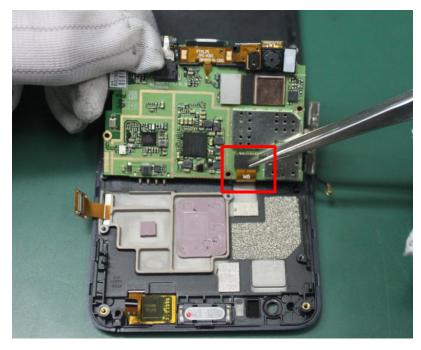


Step4: sim board

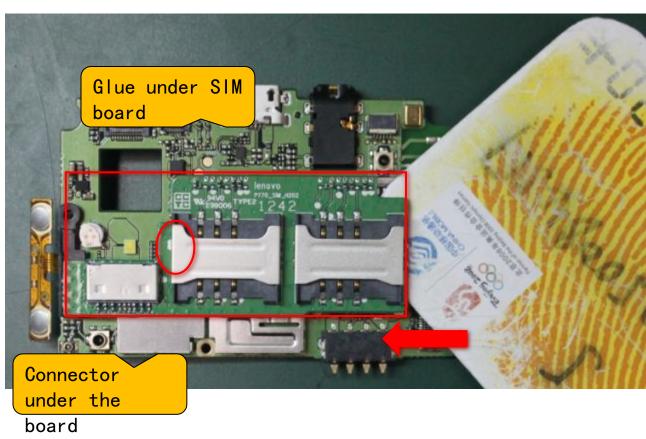


lenovo 联想移动 客服技术支持处

联想机密 联想机密 联想机密

Step5: SUB PCBA

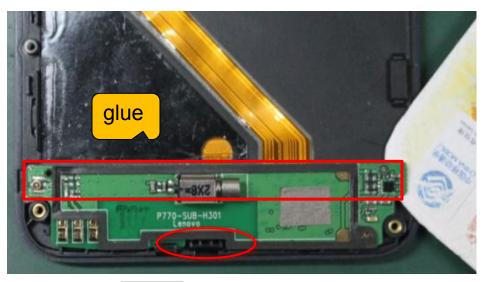

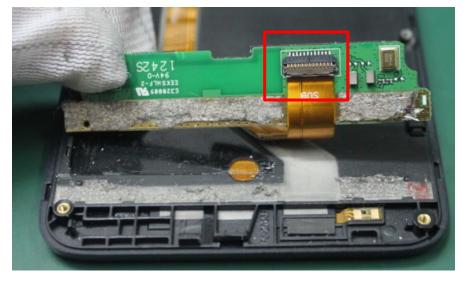



lenovo 联想移动 客服技术支持处

联想机密 联想机密 联想机密

Step6: TP

①use blow drier to heat up the TP around uniformity. To soft the glue and separate the TP from front housing.





Attention: 1, heating time not too long and the temperature not too high; 2, be careful of the FPC




联想机密

- Step7: TP
 - 2 After glue is soft, use the sucker 3 to take down TP
 - 3 Take attention to the TP FPC

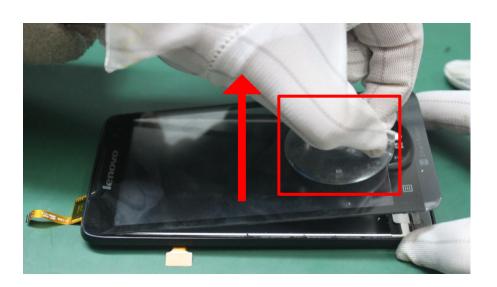

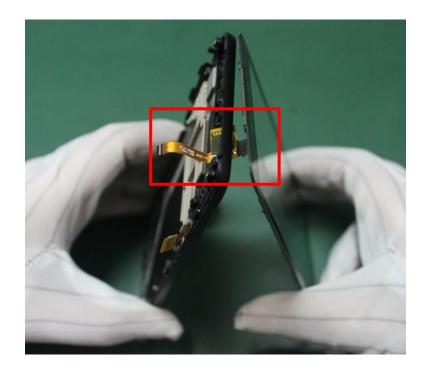

• Step8: LCD

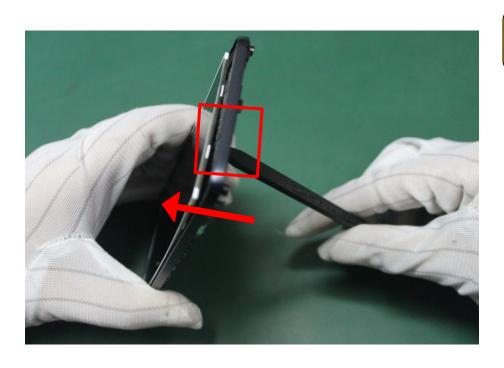






联想机密 联想机密

5. Explosive view

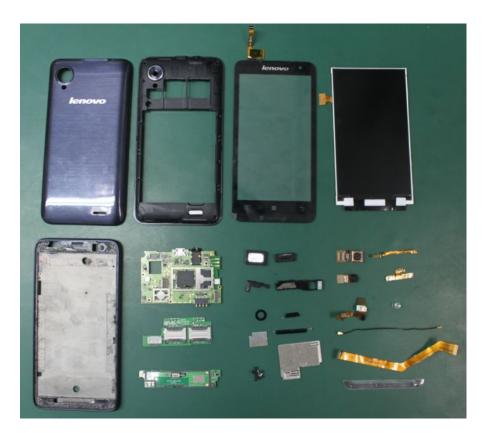



FINISH

lenovo 联想移动 客服技术支持处

> 联想机密 联想机密

thank you grazie merci danke grazias 谢谢 спасибо gracias obrigado ありがとう dank takk bedankt dakujem

