


1.Step1: install two leg frames onto the cement floor(we always prepare a board for the sample chair) with 4 screws, then cover the holes by the black plastic cap. Distance from the center of hole to another center of the hole is 560cm



2.Step 2. fix the connectors onto both leg frames with screws, see pictures

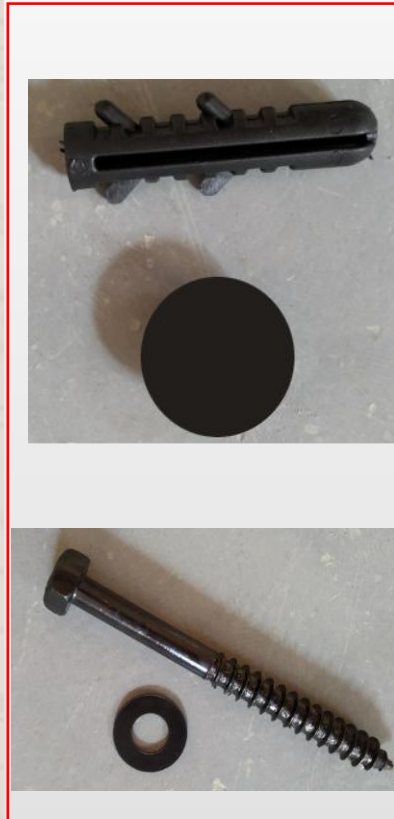

3. Step 3. fix the chair back onto the leg frame, fix to the connector by 2 screws



4. Step 4. Install the chair seat, Use a kind of wrench like this, to adjust the center metal at the seat. This step it is so important. If installed not well. It can not folding.



5. Step5. fix the plastic shell onto the chair back by screws.

