

Introduction of the Navigation and ILS, VOR/DME

Zhomart Mustafa

ΛΘ-4

Main ideas

- What is navigation?
- What is navigation used for?
- ILS ; VOR/DME

What is navigation?

The process or activity of accurately ascertaining one's position and planning and following a route.





What is navigation used for?

Navigation is the **art and science of determining the position of a ship, plane or other vehicle, and guiding it to a specific destination.**

Navigation requires a person to know the vehicle's relative location, or position compared to other known locations.

ILS Display at the Cockpit

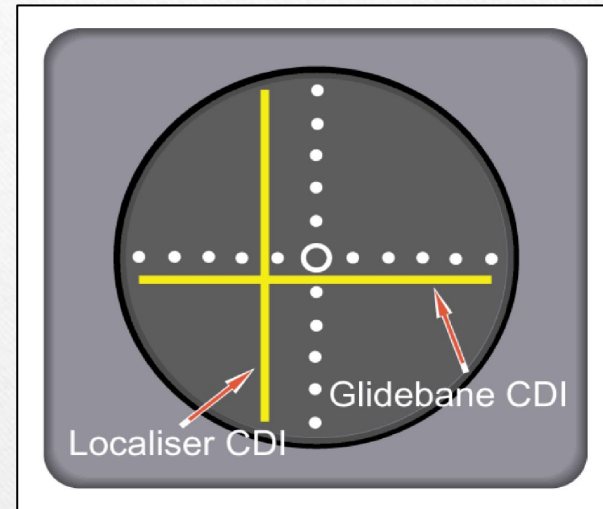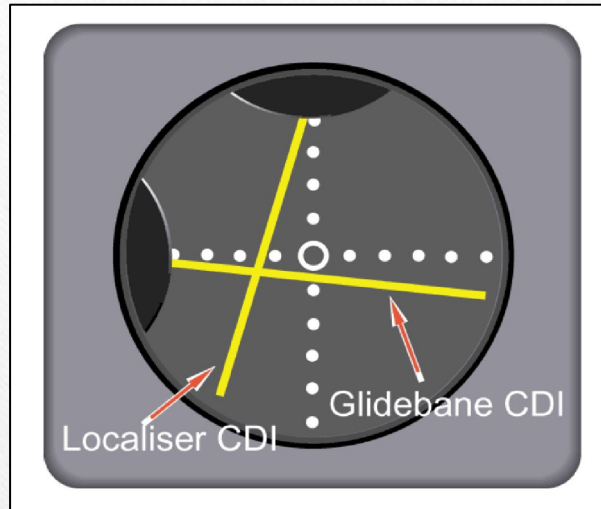


In aviation, the **instrument landing system (ILS)** is a radio navigation system


that provides short-range guidance to aircraft to allow the aircraft to approach a runway at night or in bad weather.

In its original form, it allows an aircraft to approach until it is 200 feet (61 m) over the ground,
Or (800 m) of the runway.

ILS Display at the Cockpit

ILS uses two directional Radio signals, the *localizer* (108 to 112 MHz frequency), which provides horizontal guidance, and the *glideslope* (329.15 to 335 MHz frequency) for vertical.

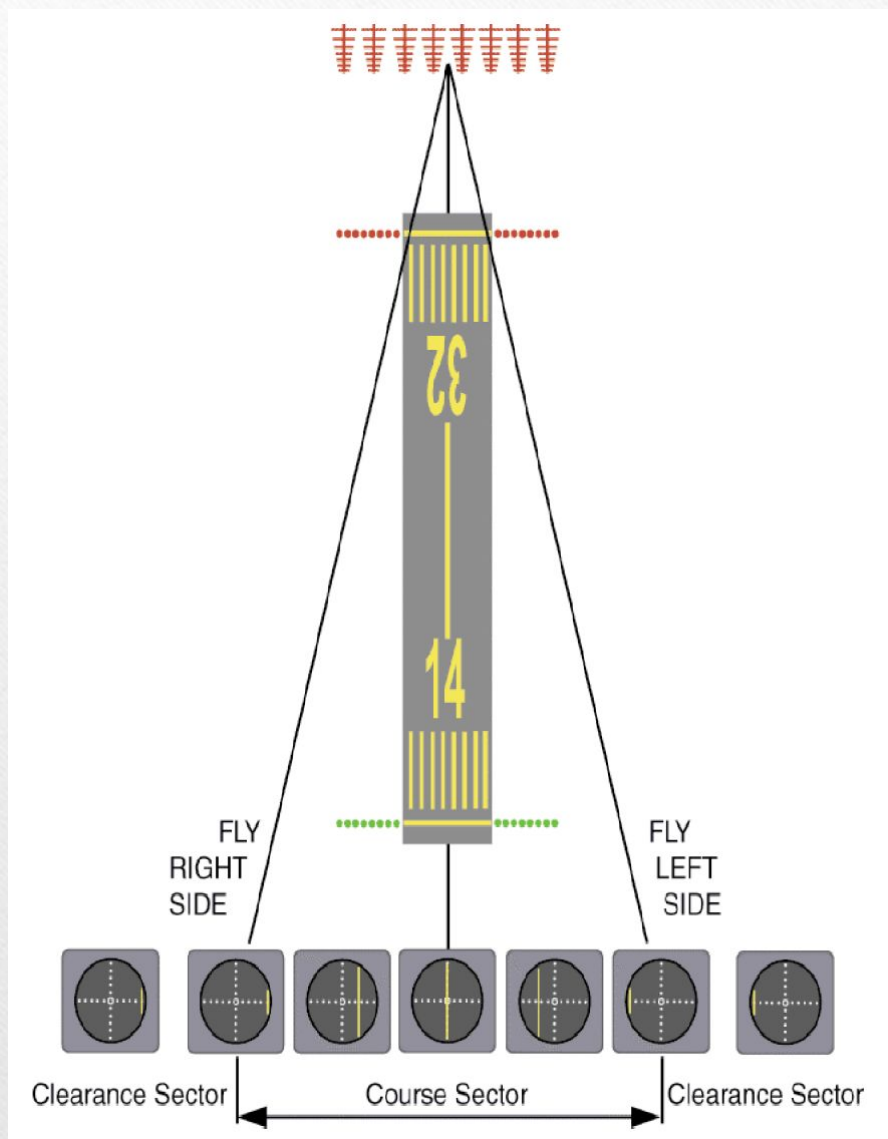


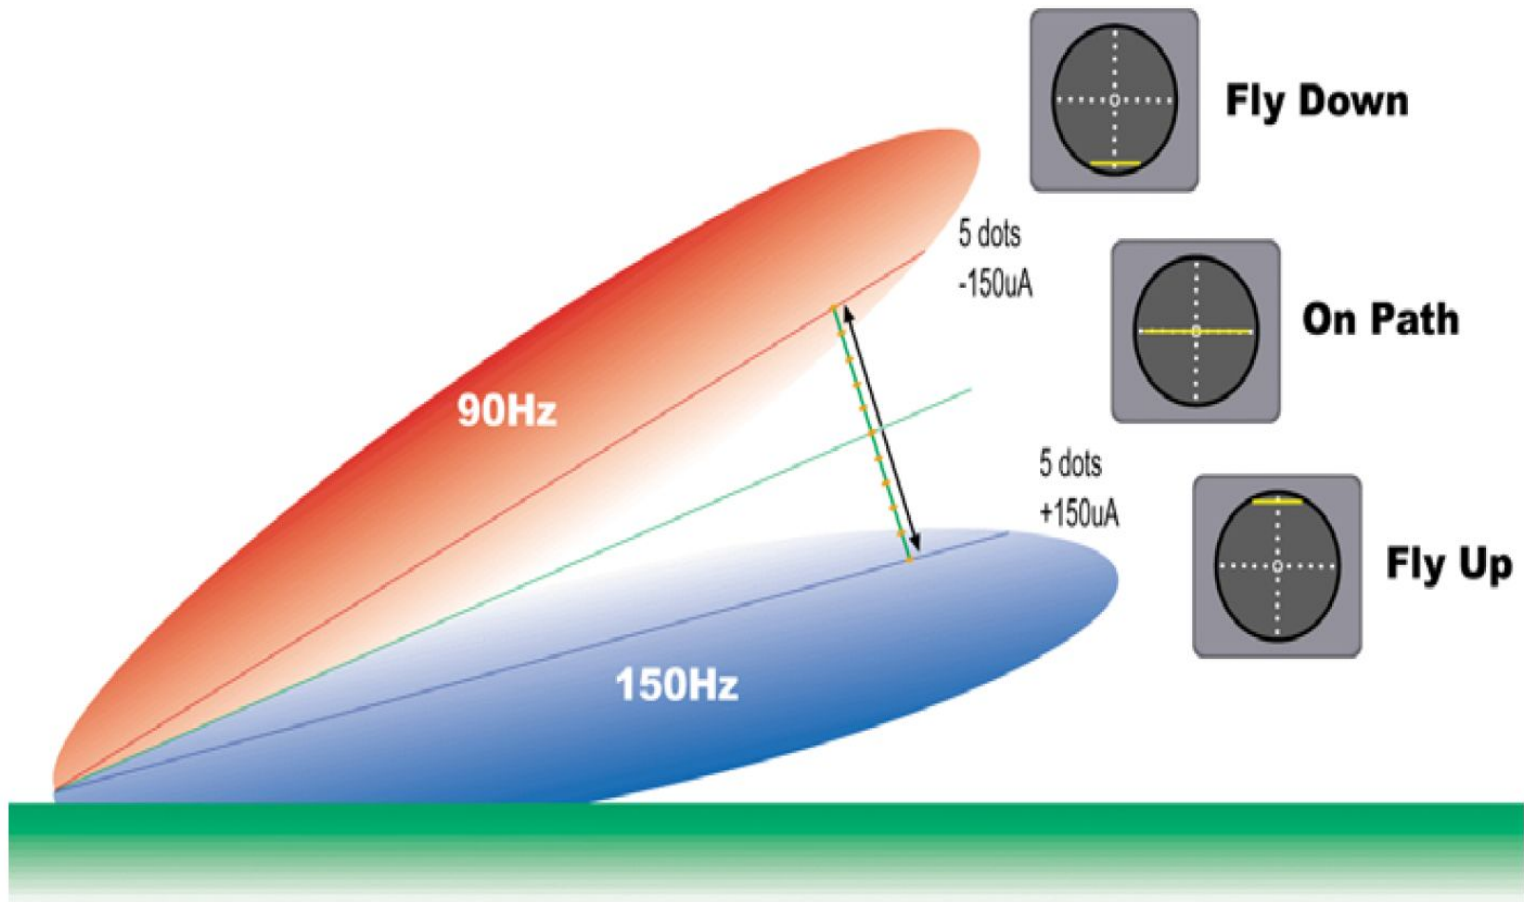




ILS Display at the Cockpit

ILS Display at the Cockpit




The relationship between the aircraft's position and these signals is displayed on an aircraft instrument, often additional pointers in the attitude indicator.

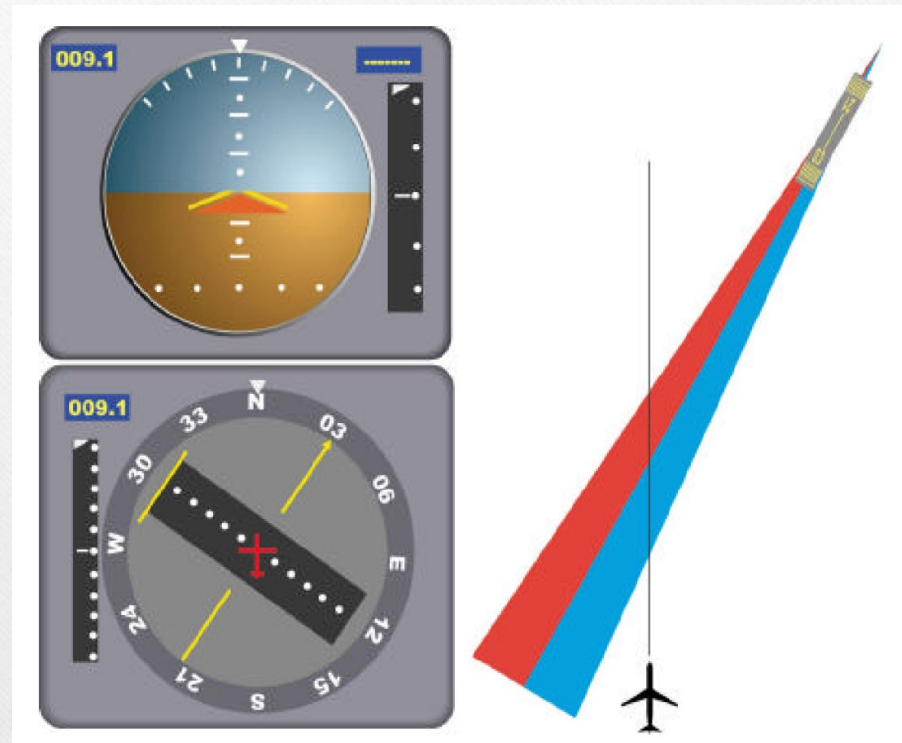


ILS Display at the Cockpit

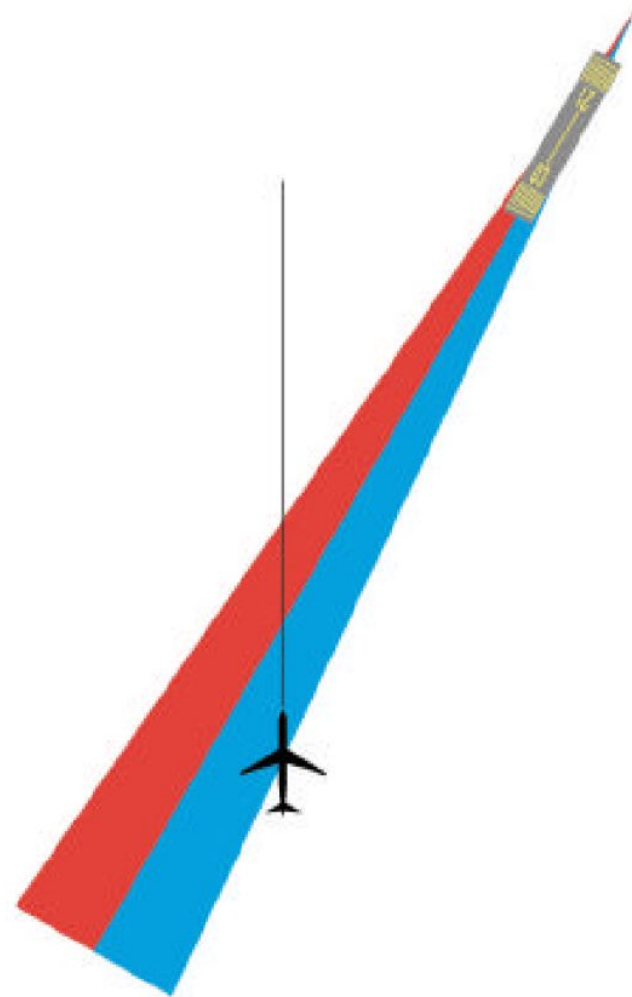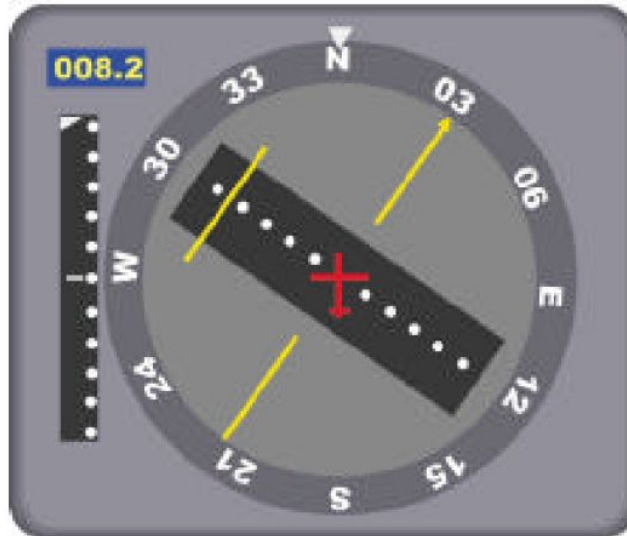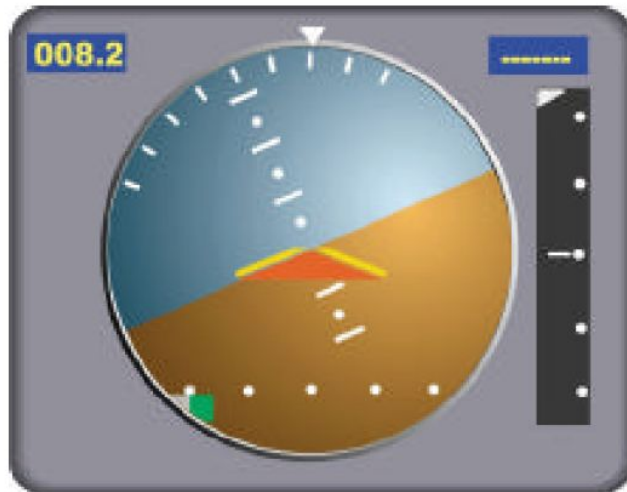


ILS Display at the Cockpit

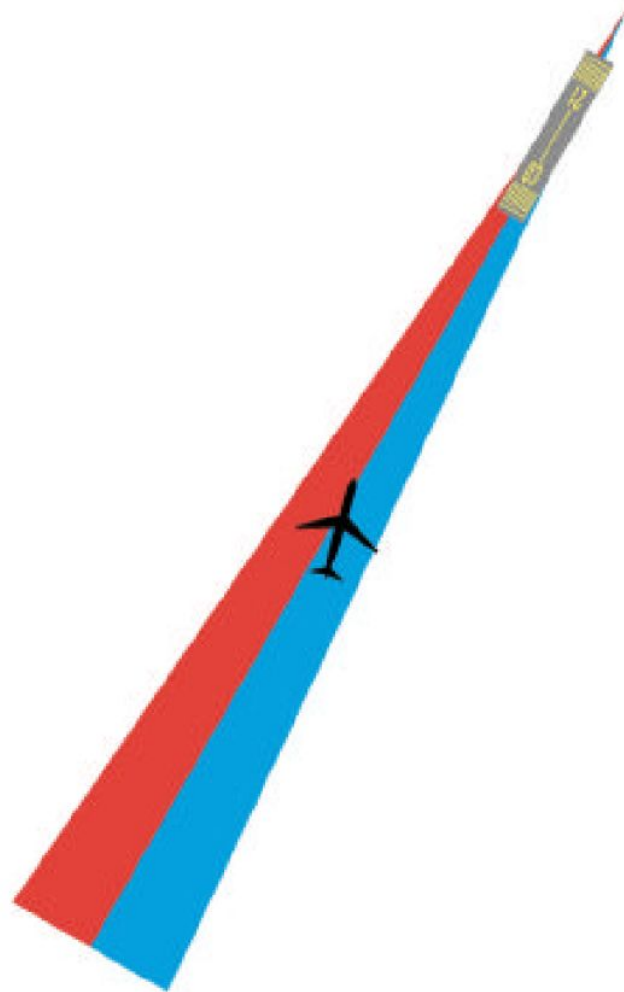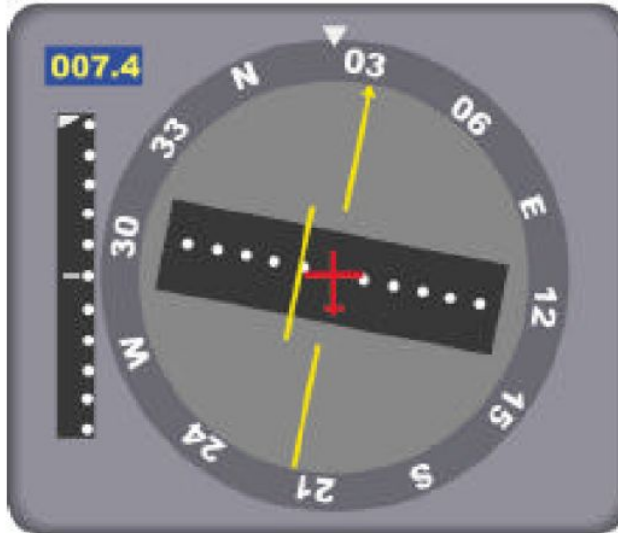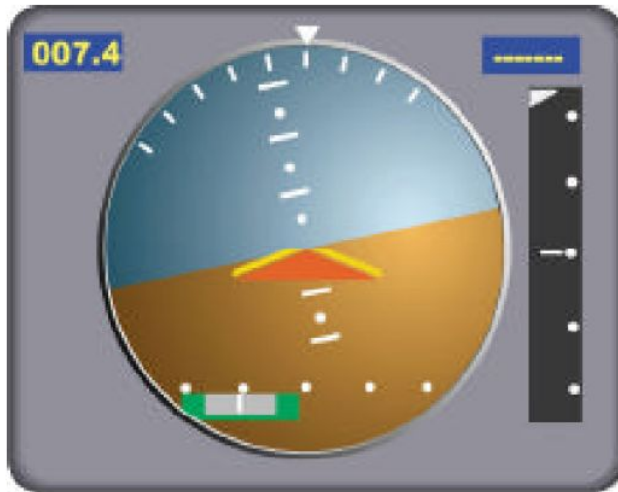

ILS Display at the Cockpit

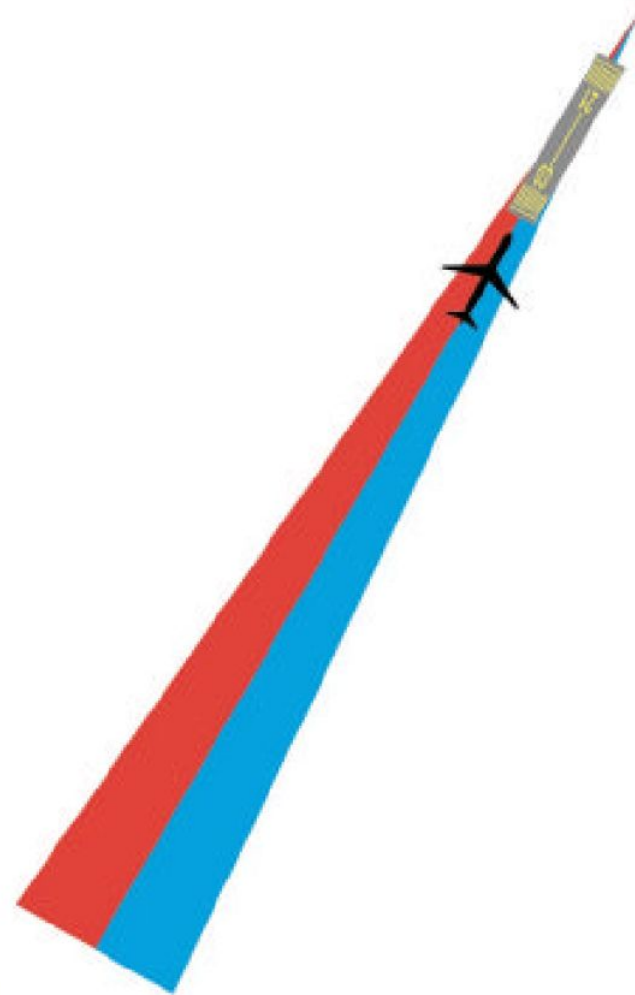

ILS (LLZ+GP+MB)

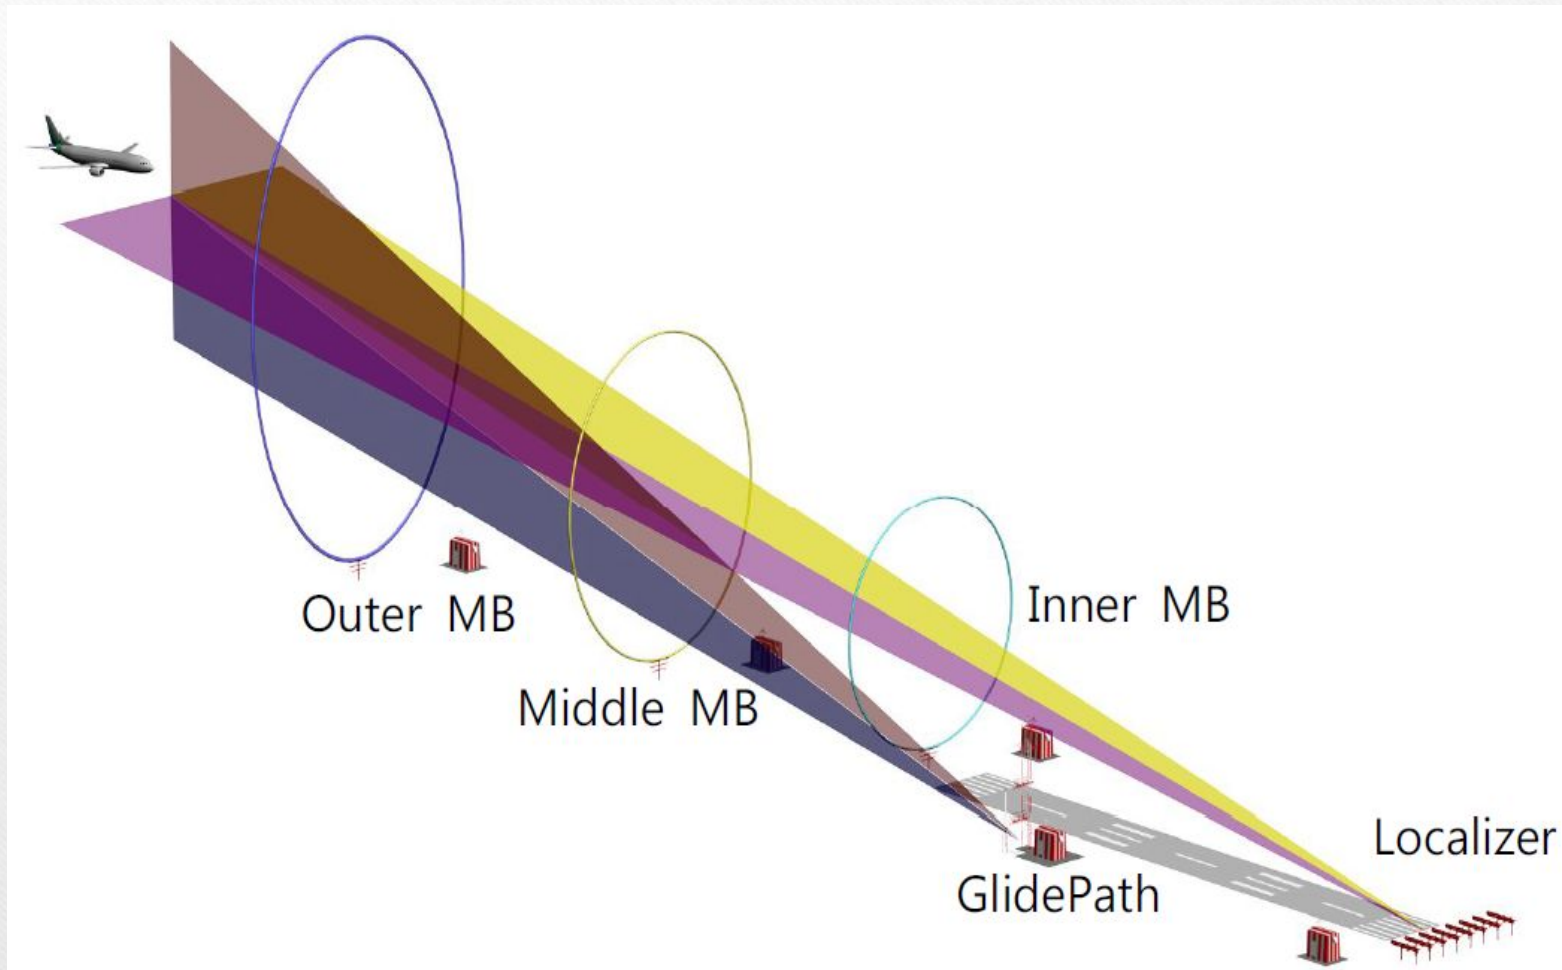


LLZ Antenna Array



An *instrument landing system* operates as a ground-based instrument approach system that provides precision lateral and vertical guidance to an aircraft approaching and landing on a runway, using a combination of radio signals and, in many cases, high-intensity lighting arrays to enable a safe landing during instrument meteorological conditions (IMC), such as low ceilings or reduced visibility due to fog, rain, or blowing snow.

LLZ Coverage

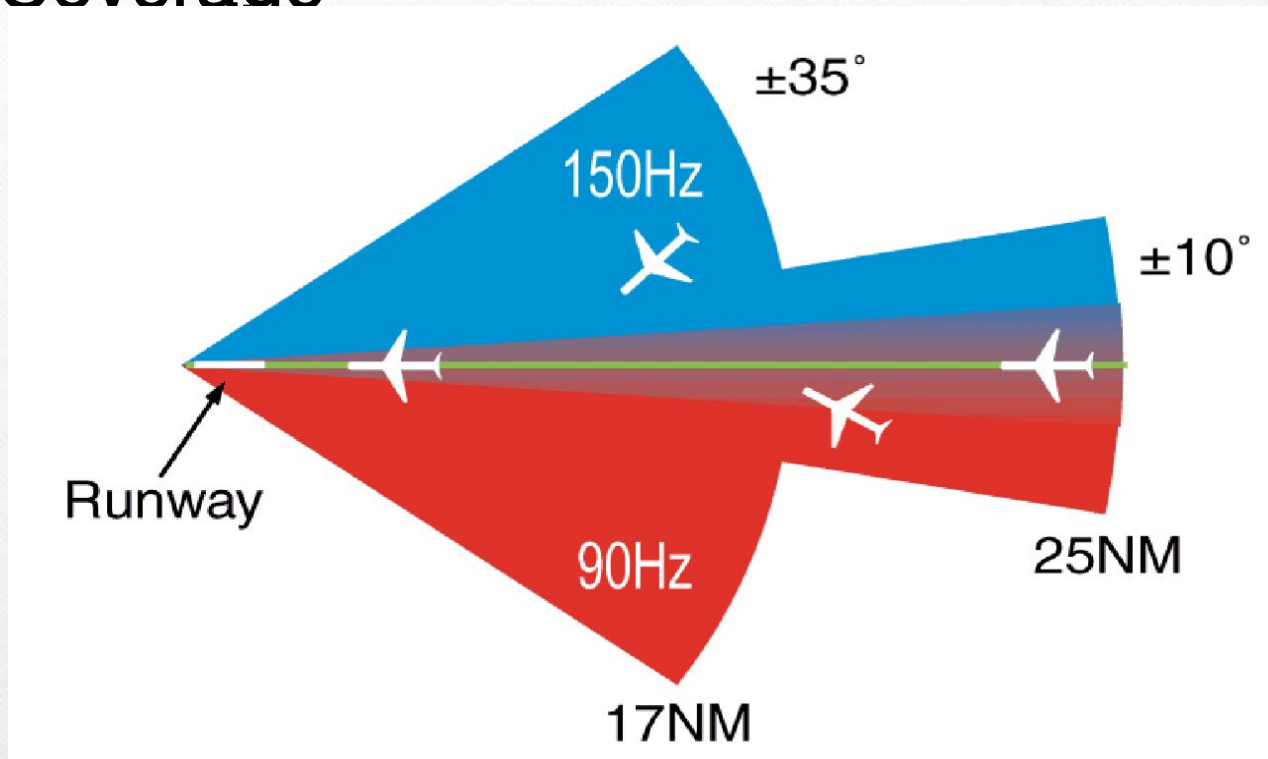


- Coverage
 - 25NM : 46.3 km within 10° from course line
 - 17NM : 31.5 km within 10° and 35° from course line
 - 10NM : 18.5 km outside 35° if coverage is required


DVOR/DME

In radio navigation, a **VOR/DME** is a radio beacon that combines a VHF omnidirectional range (VOR) with a distance measuring equipment (DME).

The VOR allows the receiver to measure its bearing to or from the beacon, while the DME provides the slant distance between the receiver and the station. Together, the two measurements allow the receiver to compute a position fix.

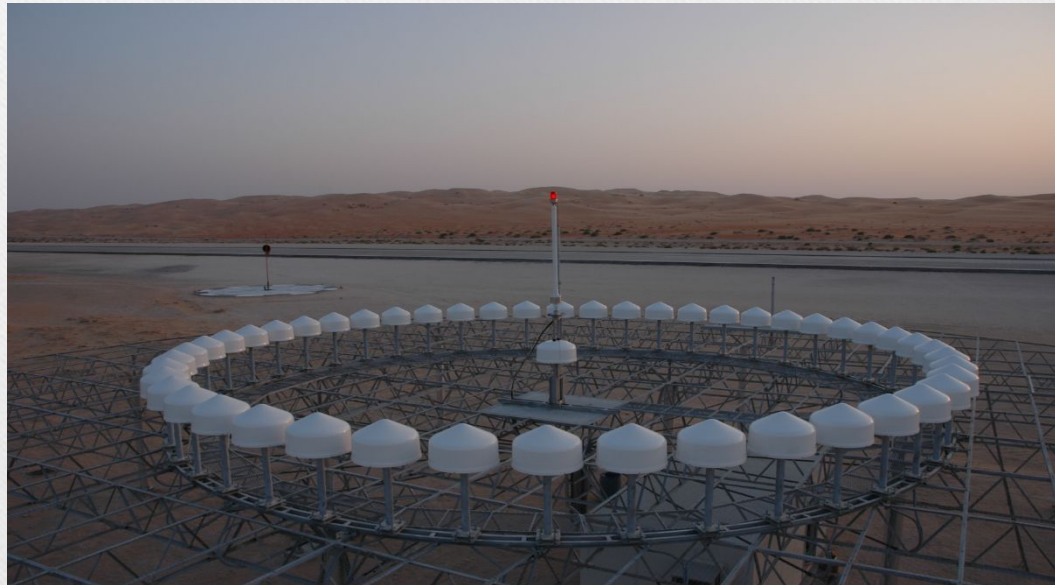

VOR Display at the Cockpit

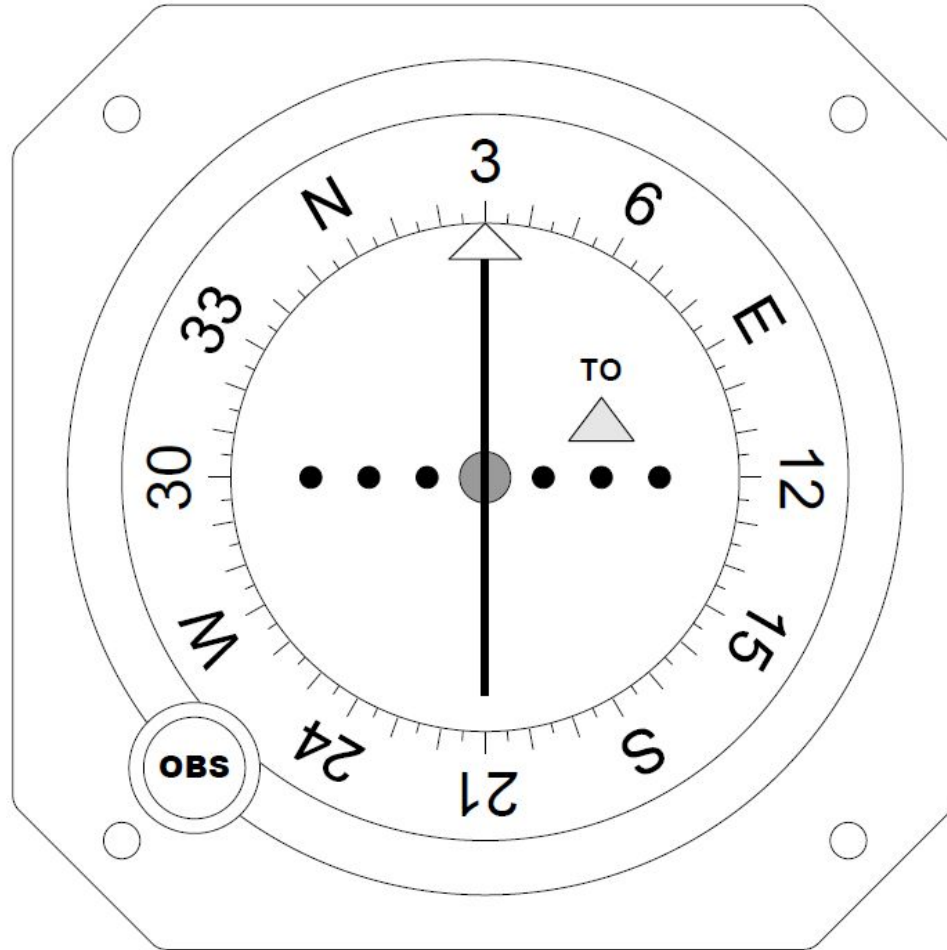







DVOR/DME

The **VOR** system was first introduced in the 1930s, but didn't enter significant commercial use until the early 1950s.

It became much more practical with the introduction of low-cost solid state receivers in the 1960s.

DME was a modification of World War II-era navigation systems, and began development in 1946. Like VOR, it only became practical with the introduction of solid state receivers during the 1960s.

Phase Difference of each position

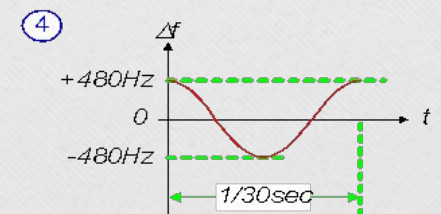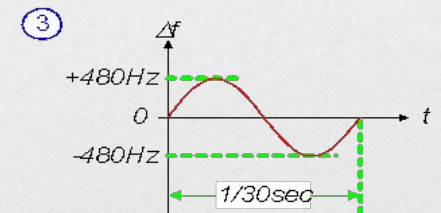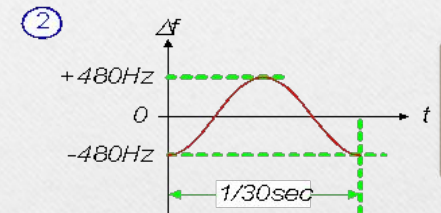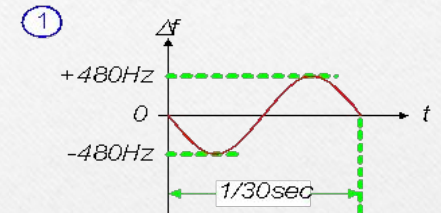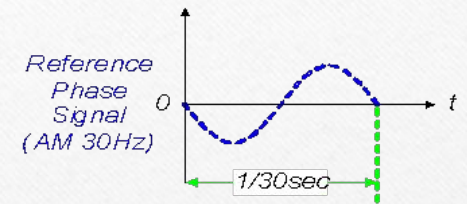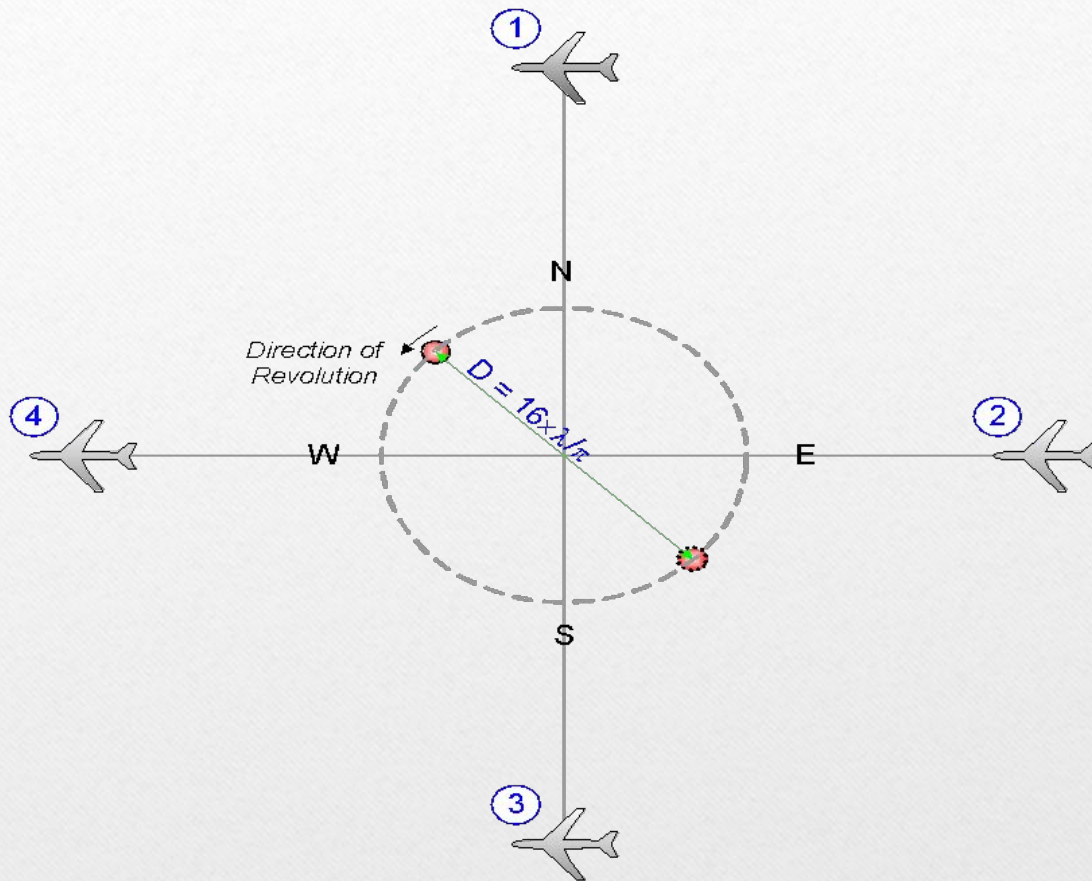


Distance Calculation

The Aircraft Interrogator transmits an omnidirectional interrogation.



The Interrogation travels
At the speed of light.

The Replay travels
At the speed of light.

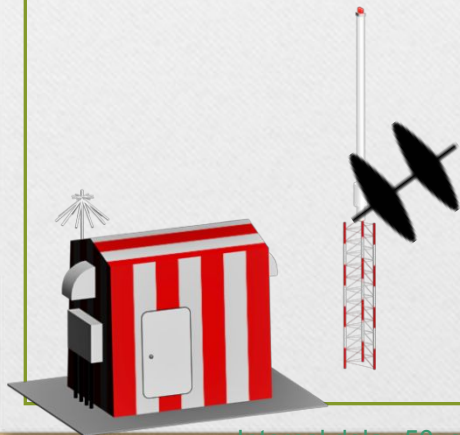

Internal delay $50\mu\text{s}(\times \text{CH})$

$$\text{Distance} = \frac{\text{Total travel time} - 50\mu\text{s}}{12.36\mu\text{s}/\text{NM}}$$

(Slant)



Thank You
FOR YOUR ATTENTION