


Samsung C3520

Инструкция denis95ekb

# Setup USB Driver!



1. Жми “Setup.exe”, Выбери “Sunstone\_V5\_00\_0\_1\_WHQLed” 文件夹中。

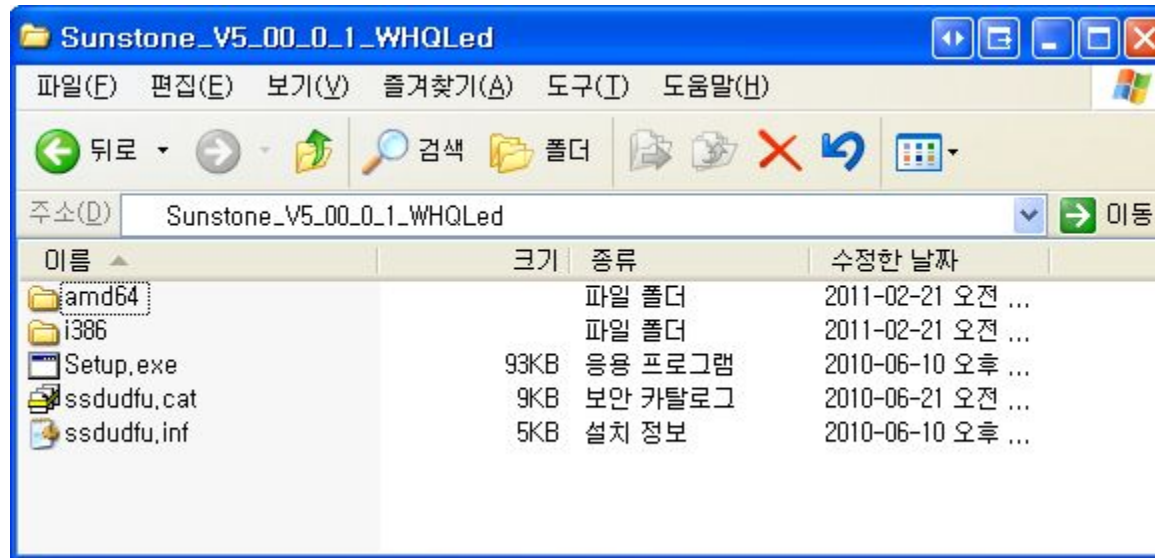


2. Click the “Install”.




# 1. 运行 bfloder.exe

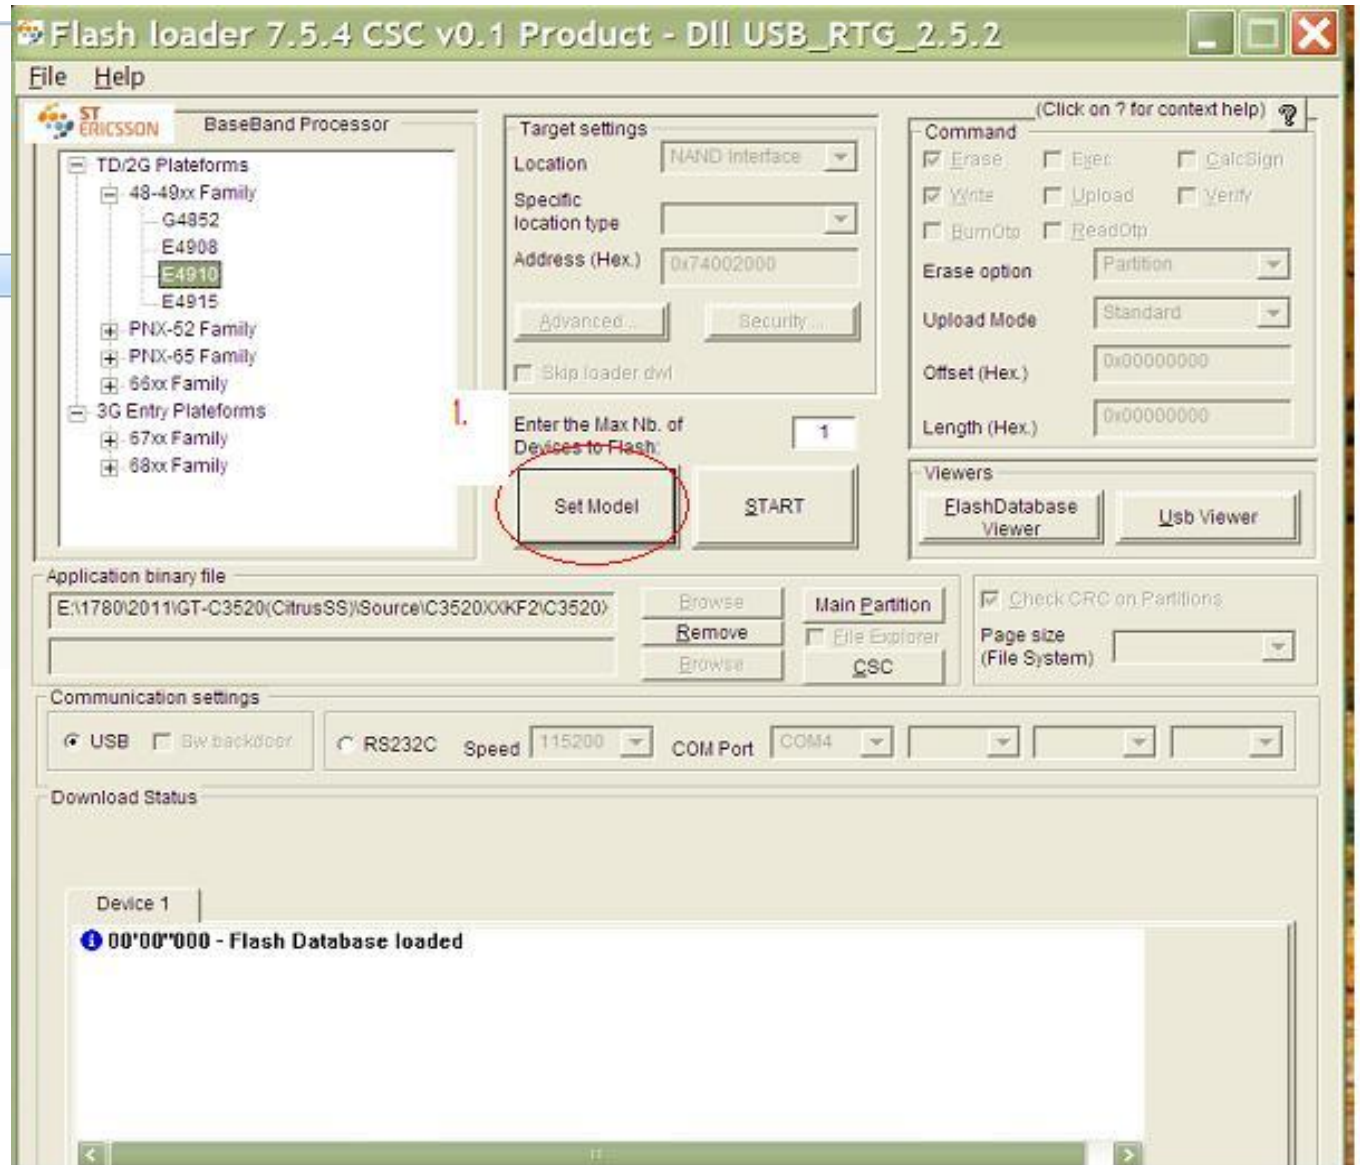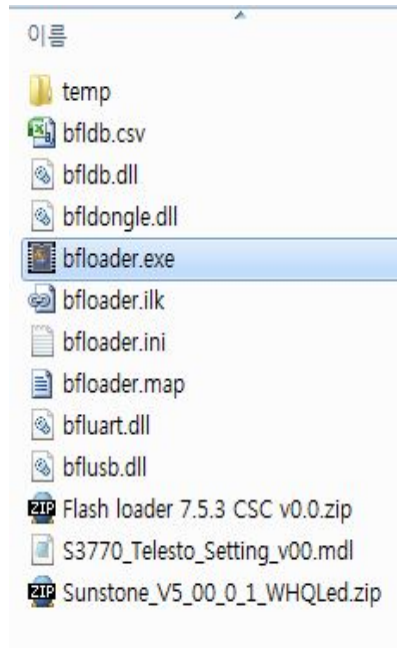


## 2. 选择 Set Model

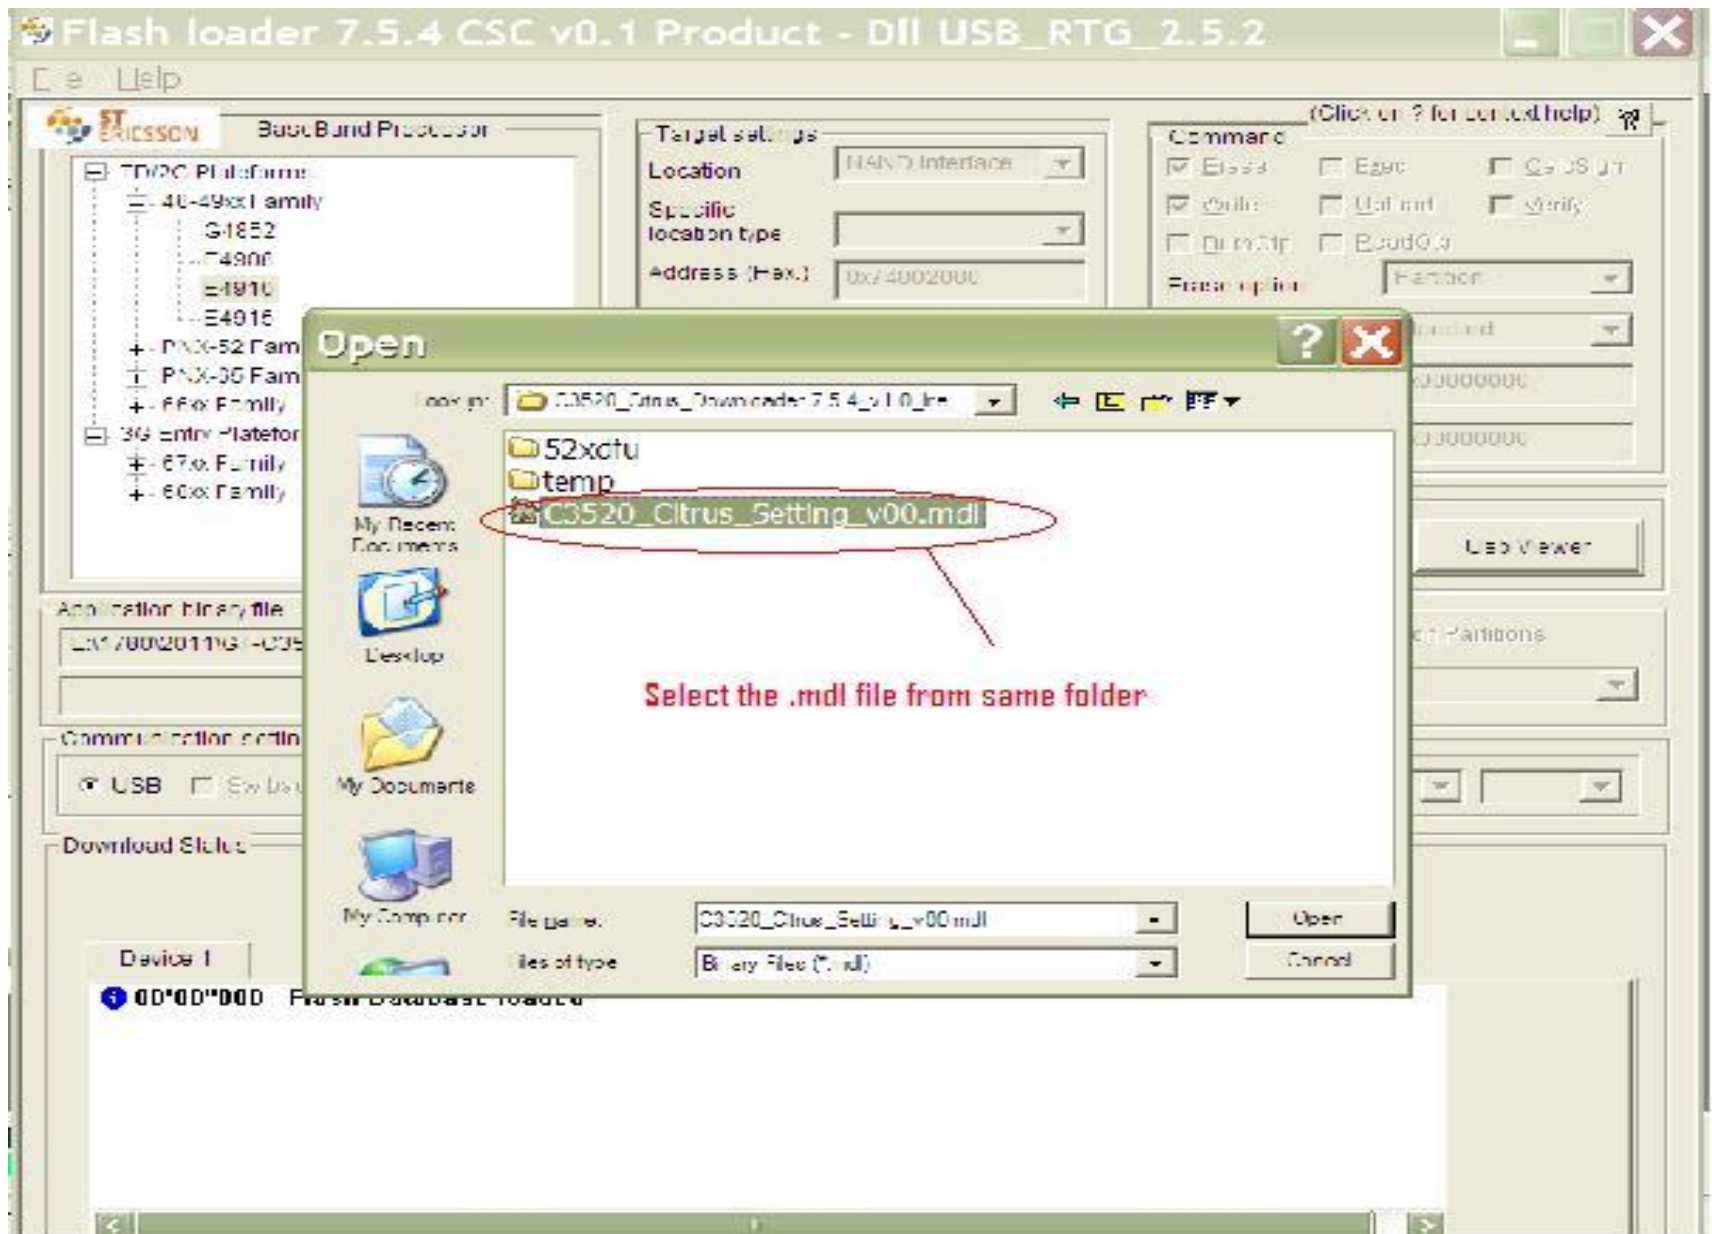

### 3. 选择 Main PTT 文件 (在BIN文件夹里面)

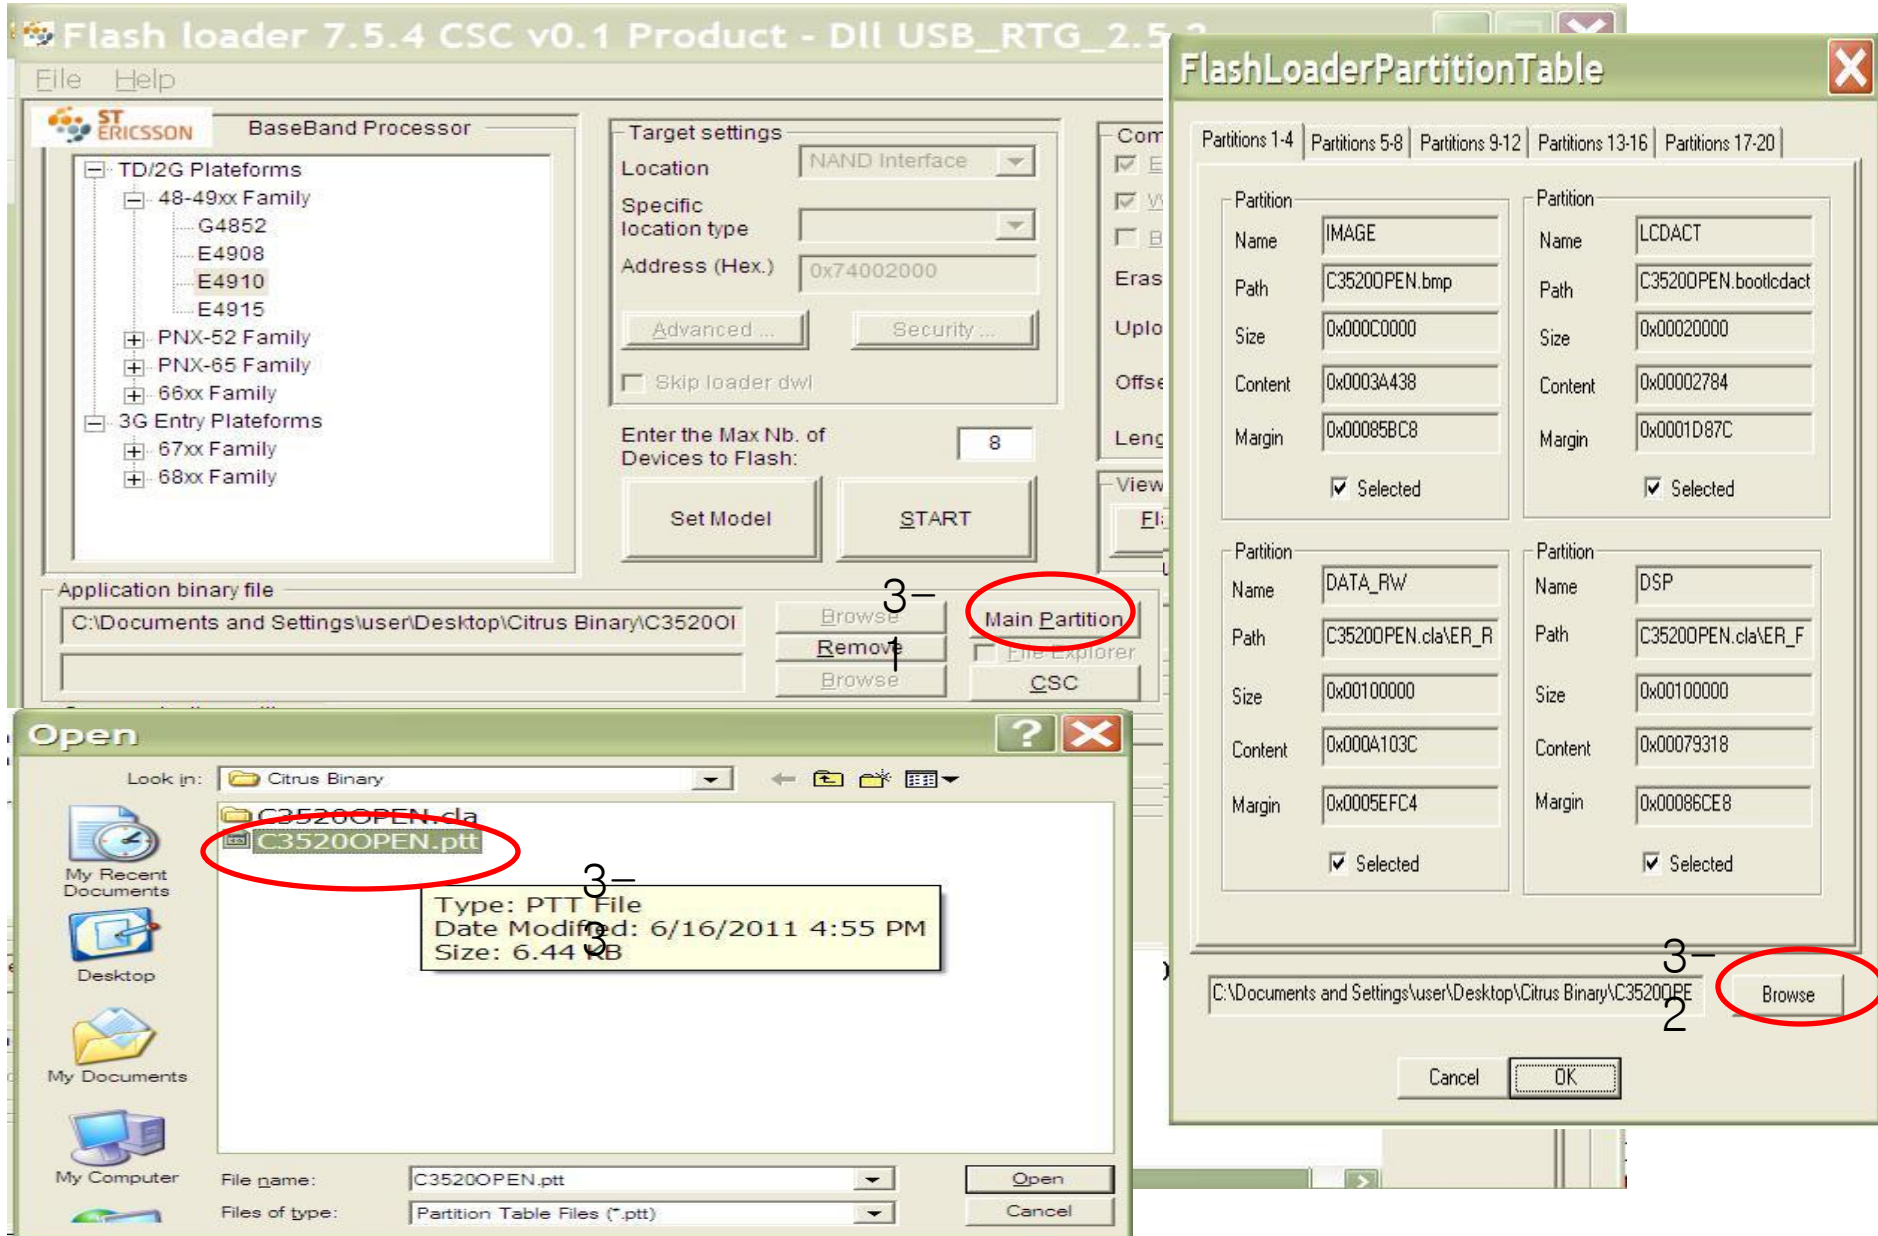

# 4. 选择 CSC PTT文件 (在CSC文件夹里面)

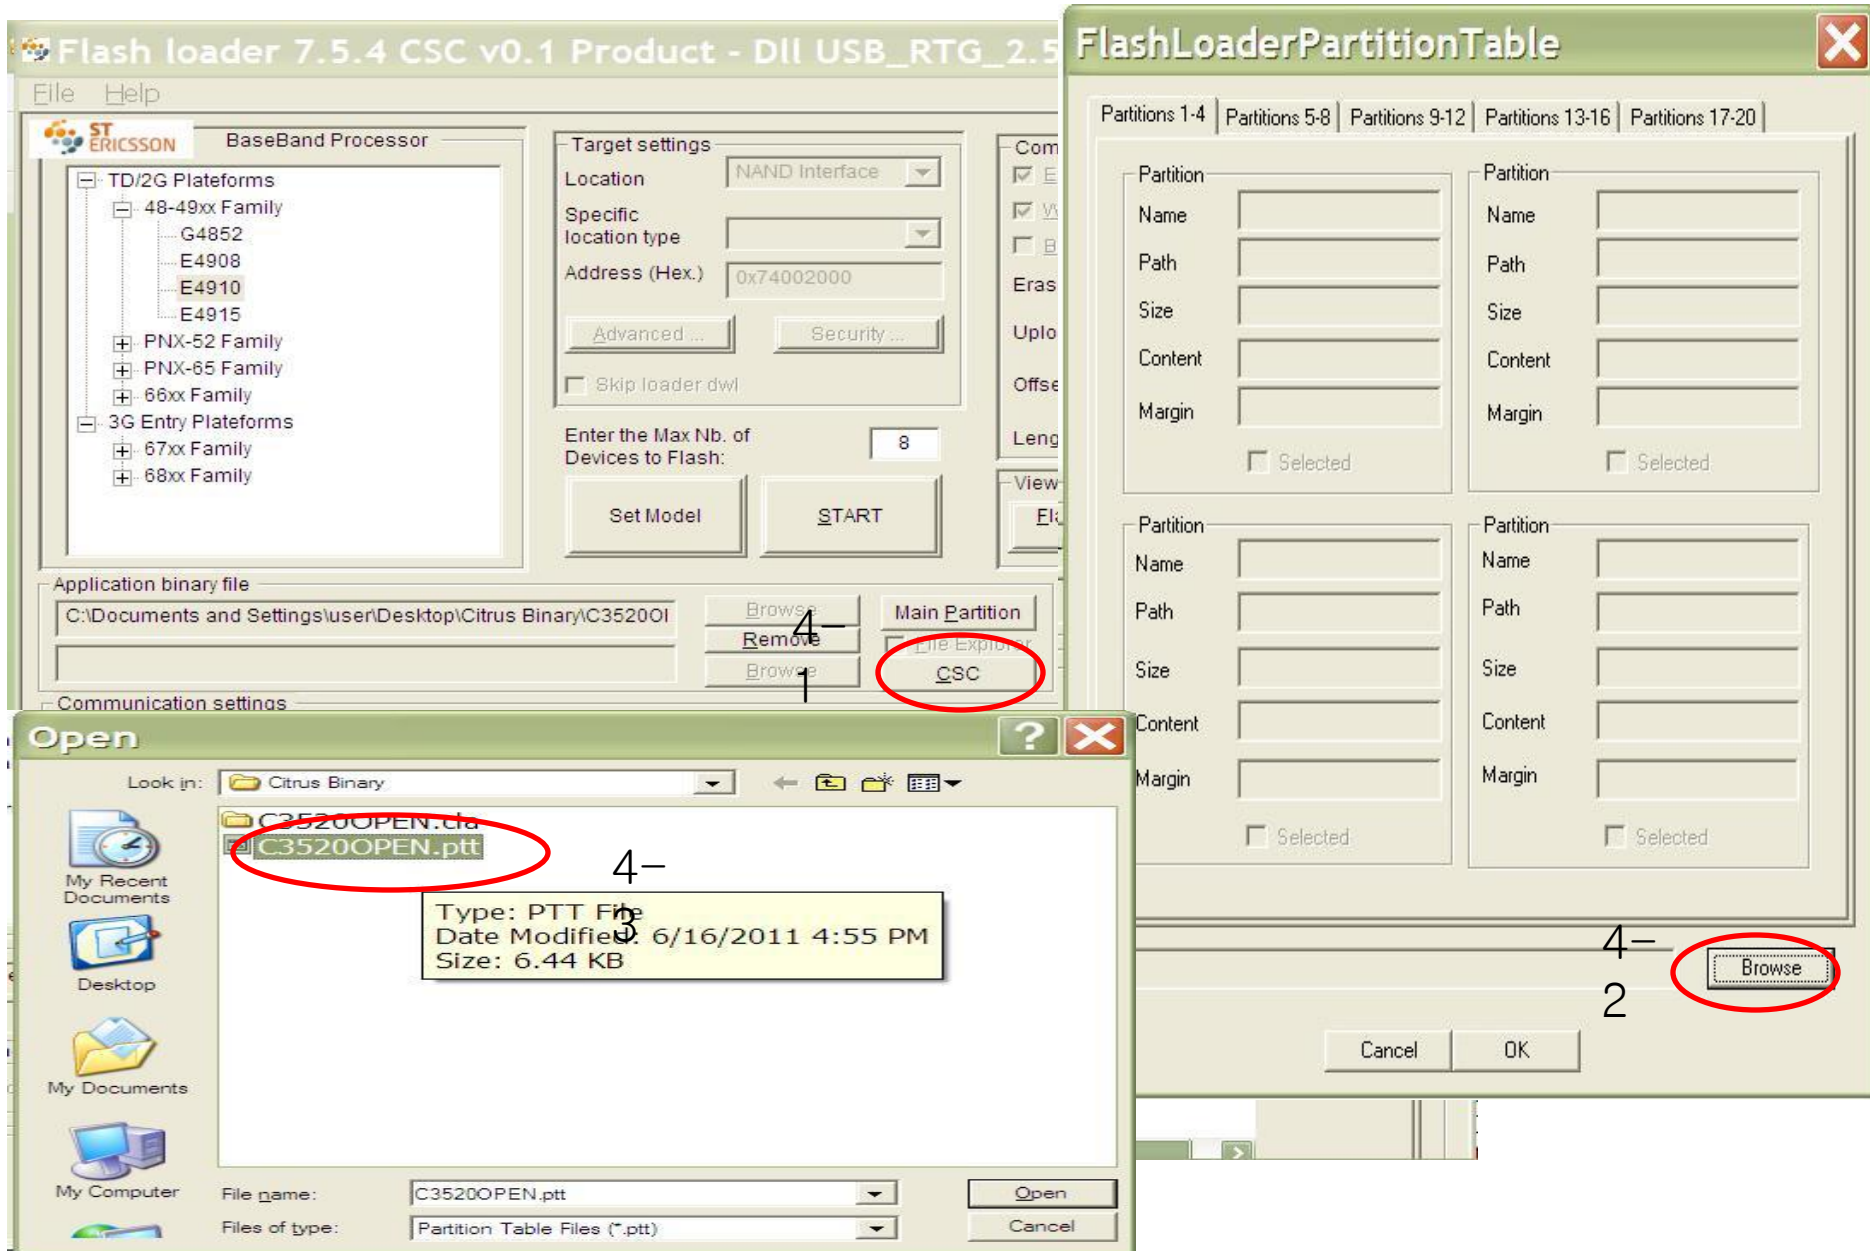

# 5. Click Start and Download binary

Flash loader 7.5.4 CSC v0.1 Product - DII USB\_RTG\_2.5.2

File Help

ST ERICSSON BaseBand Processor

TD/2G Platforms

- 48-49xx Family
  - ... G4852
  - ... E4908
  - ... E4910
  - ... E4915
- + PNx-52 Family
- + PNx-65 Family
- + 66xx Family
- 3G Entry Platforms
  - + 67xx Family
  - + 68xx Family

Target settings

Location: NAND Interface

Specific location type: [Dropdown]

Address (Hex.): 0x74002000

Advanced ... Security ...

Skip loader.dwl

Enter the Max Nb. of Devices to Flash: 8

Set Model STOP

Command (Click on ? for context help) ?

Erase  Exec  CalcSign

Write  Upload  Verify

BurnOtp  ReadOtp

Erase option: Partition

Upload Mode: Standard

Offset (Hex.): 0x00000000

Length (Hex.): 0x00000000

Viewers

FlashDatabase Viewer Usb Viewer

Application binary file

E:\1780\2011\GT-C3520(CitrusSS)\Source\C3520XXKF2\C3520\

C:\Documents and Settings\user\Desktop\Citrus Binary\C3520OI

Browse Remove Browse Mail File Explorer CBC

Check CRC on Partitions:

Page size (File System): [Dropdown]

Communication settings

USB  Sw backdoor

RS232C: Speed 115200 COM Port COM4

Download Status

Device 1 Device 2 Device 3 Device 4 Device 5 Device 6 Device 7 Device 8

00'00''000 - Flash Database loaded

27'17''110 - Waiting for board reset

after clicking on Start; wait for this message....now connect USB cable to phone

# 升级

