


Fight and extinguishing of fires



Nozzles



Nozzles

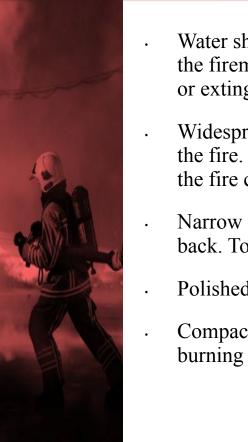


Water shield (spray, more than 90) Creates a water curtain, protects the fireman from the heat radiated by the fire. Used to indirectly attack or extinguish

Widespread spraying (about 60 °) For indirect attacks and attacks near the fire. It is given in short "shots" into the heated area of air above the fire center. liquids.


Narrow spraying (about 30 °) To control the fire, "kicking" the flame back. To disperse smoke, vapor, heat; bordery cooling, etc.

Polished jet (about 15 °) For cooling surfaces at a distance.

Compact jet. For a direct attack from a long range, breaking the burning debris. Do not use to extinguish burning liquids!

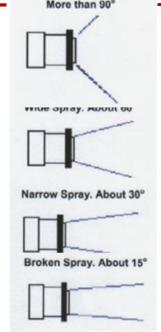

Water Wall / Full Shield





Fight and extinguishing of fires

Water Jet 20-25m






Nozzles



Foam

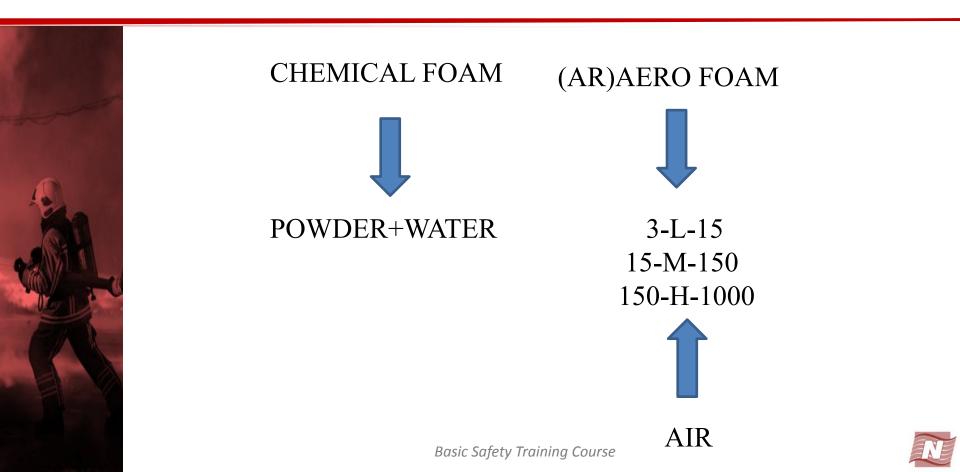

Foam aplicators

3-L-15

Manual foam aplicators are designed to form low-expansion fire extinguishing foam and then send it to the source of ignition.







Foam aplicators



High foam system


Fight and extinguishing of fires

150-Н-1000(1см) 30м.





Foam monitors

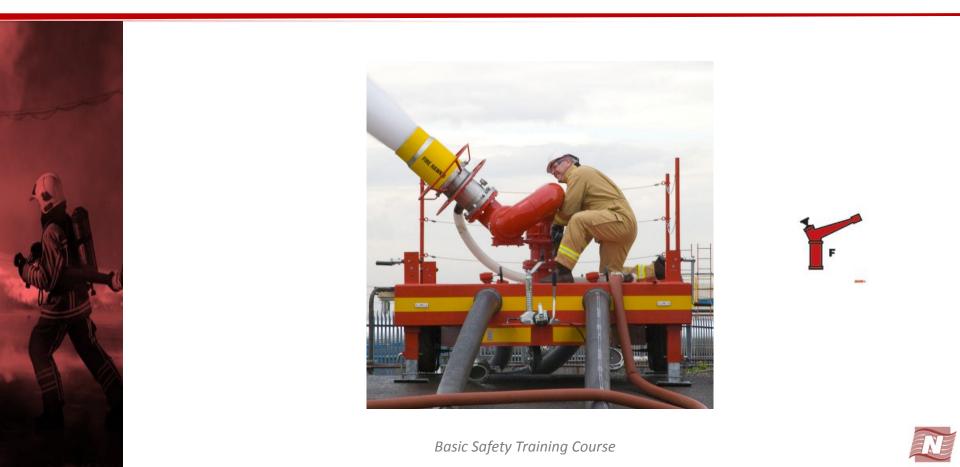

Fire hoses

The length of the fire hoses for water and foam at the cranes installed on the open decks should be 15-20 m, for the cranes in the rooms, as well as on the open decks of ships with a gross tonnage of less than 500 per. t. - about 10 m.







Fire hoses



When working with fire hoses should be:

- Avoid bending the fire hoses and grabbing sharp objects;
- The fire hoses should be moved slowly,
- It is necessary to leave the fire place facing the fire.







Fight and extinguishing of fires



Safe for wood, paper, liquids

Not for: electrical equipment, metal fires,





Fight and extinguishing of fires



Warning

Don't use Water or Foam to extinguish burning Electric Devices/Gear





Fight and extinguishing of fires



Safe for wood, paper, liquids, electrical equipment, gases.








Safe for liquids, electrical equipment.

Not for wood, paper, texstiles, metals





Wheeled extinguishers

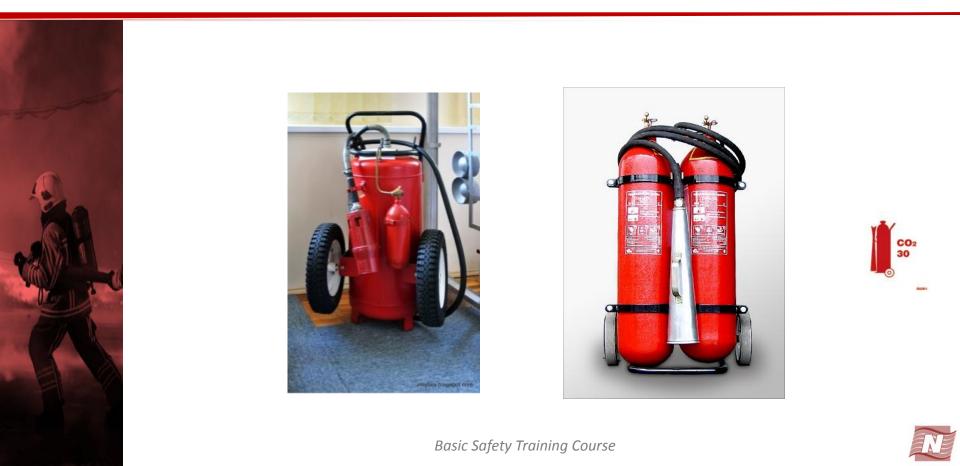

Fire blankets




Fire blanket uses for:

- localization of combustion in the initial stage of the fire;
- extinguishing burning clothing to the victims;
- protection of structures and equipment during hot work;
- extinguishing fire caused by burning combustible materials by stopping the access of oxygen.



Fireman's outfit

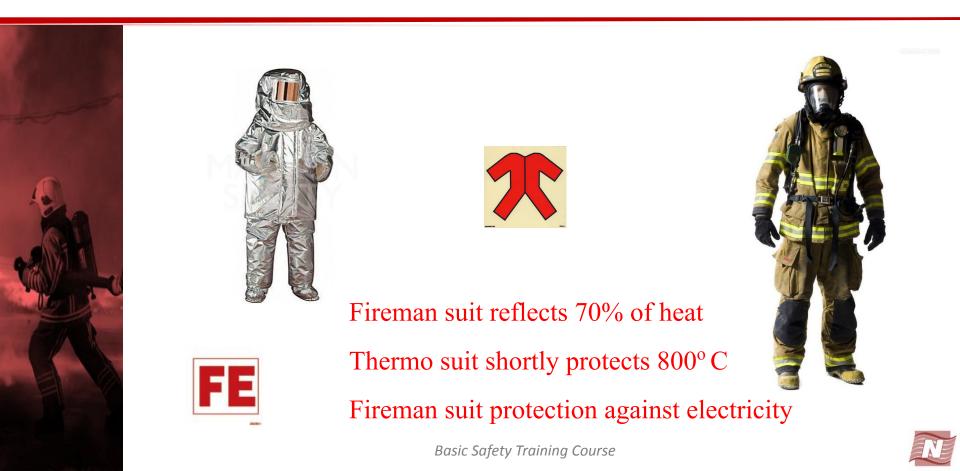

EEBD



. Emergency Escape Breathing Devices (EEBD).







Fixed systems

Fight and extinguishing of fires

Fixed Fire Fighting Systems

- CO2 precautions!
- FOAM
- Water Mist
- Wet Chemical













Fixed systems

Safety regulations:

- The substance used must not form toxic gases;
- The amount of substance used must be adequate;
- Fixed system must be equipped with valves;
- Only manual launch of the system is possible with the permission of the captain.





Engine room fires

Fight and extinguishing of fires

ENGINE ROOM FIRES

Statistics: 25% of total on board fires ER fire cause: **heat + air + fuel**


CO2 System precautions, Quick Closing Valves



Fire valves



International shore conection

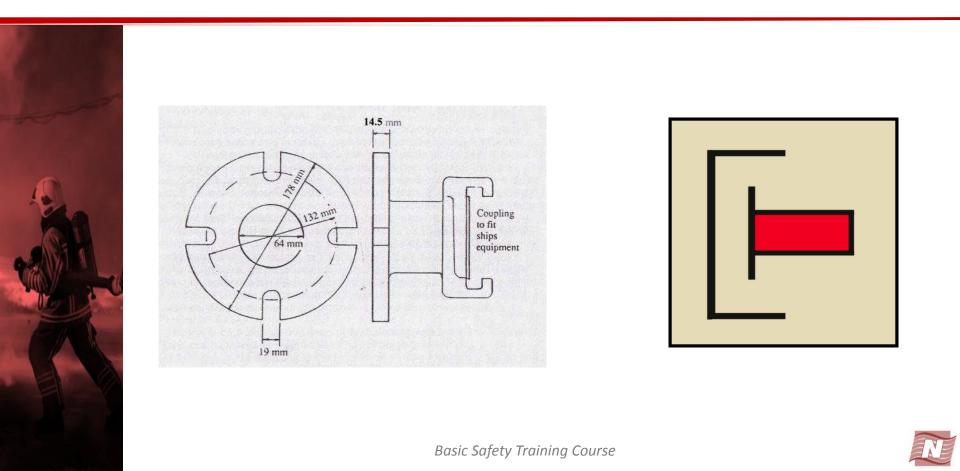

Breathing apparatus



Breathing apparatus

Fight and extinguishing of fires



Working time depends on pressure, manufacturer,

breathing frequency

Minimum 30 min/1200lit



Breathing apparatus

Fight and extinguishing of fires



HUMAN BREATHING FREQUENCY

ave breathing frequency

16-18 times/min



Fire fighting teams

Fight and extinguishing of fires

FIRE FIGHTING TEAMS

FIRE FIGHTING SQUAD

- SUBSTITUTES
- ASSISTING SQUAD
- COMMS (Lifeline signals)
- CONTROL OF WATER PRESSURE





Fire inside compartment

Fight and extinguishing of fires



Dangerous $T = 50^{\circ}$

Critical time of keeping fire under control - 15 min



Fire on open deck

Fight and extinguishing of fires



To be approached from wind side





www.novikontas.lv

