

SN Writer v2.1052.0 Set Clean Boot SOP



Pre-conditions

- **Set clean boot only can be used with following conditions**
 - Sw load is 1048MP or later (For Yusu)
 - Sn writer is v2.1052.0 or later

Steps to set clean boot


- **Step1:**

- Open Sn Write tool, select Smart phone in “Function Select” item



- **Step2:**


- Select Set clean boot in “SP Backup Nvram Option” which just under “Function Select”

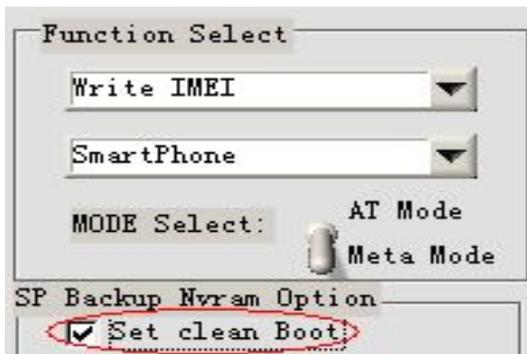

Steps to set clean boot


■ Step3:

- Adjust write options, available options for set clean boot are “Write Barcode”, “Write IMEI”, “Write BT Address”, “Write WIFI MAC Address”, “Four In One”, we take “Write IMEI” as a example.

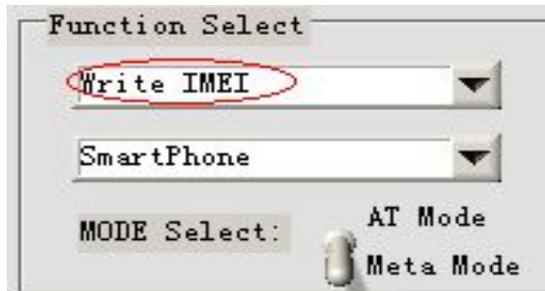

■ Step4:

- You should select “Dual IMEI” option if you want to set clean boot in “Write IMEI”, because SW can’t support Dual IMEI is 1032MP.

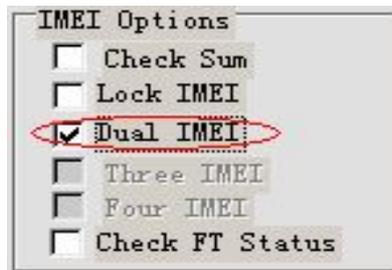

Steps to set clean boot

- **Step5:**

- Select Com port and Modem database and AP database

The screenshot shows a software interface with the following sections:

- Function Select:** Includes dropdowns for 'Write IMEI' and 'SmartPhone', and a 'MODE Select' section with radio buttons for 'AT Mode' and 'Meta Mode'.
- Connection Setting:** Includes 'BaudRate' (115200), 'COM PORT' (COM20), and 'PowerON Delay Time(s)' (5000).
- IMEI Options:** Includes checkboxes for 'Check Sum', 'Lock IMEI', 'Dual IMEI' (checked), 'Three IMEI', 'Four IMEI', and 'Check FT Status'.
- SP Backup Nvram Option:** Includes a checked checkbox for 'Set clean Boot'.
- MAC Addr Option:** Includes checkboxes for 'SP NVRAM To File' and 'Enable MAC Header'.
- Modem Database:** Contains a text field with a file path and a button labeled 'Modem Database' circled in red.
- AP Database:** Contains a text field with a file path and a button labeled 'AP Database' circled in red.

- **Step6:**

- Click “start” button


The screenshot shows a software interface with the following elements:

- Write Result Indicator:** A section containing three buttons: 'QUIT', a black circular indicator, and 'START (F6)' circled in red.

Steps to set clean boot


- Step7

- Input IMEI, then press enter key or click “OK” button in input console.

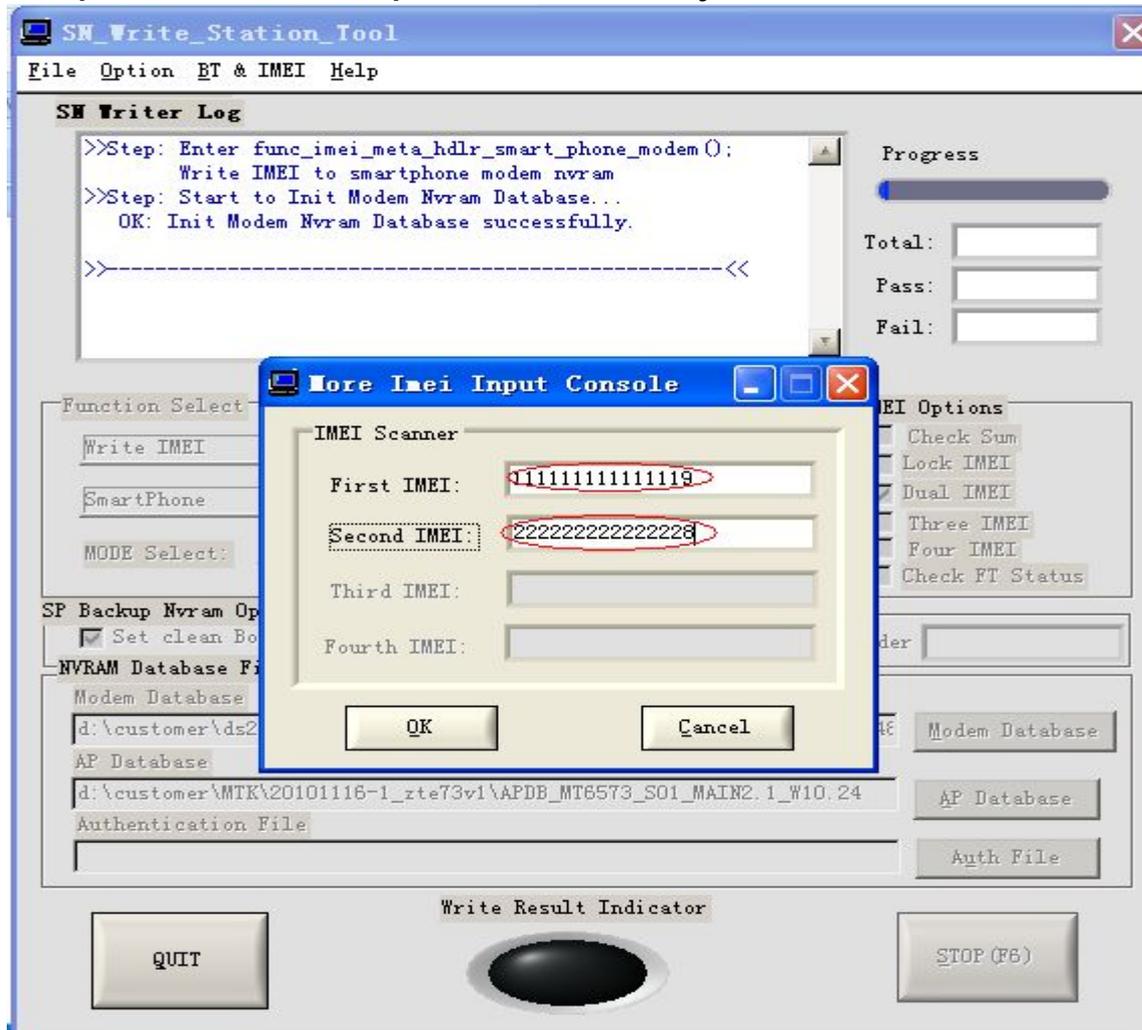

Steps to set clean boot

- **Step8:**
 - Power on your phone to enter META mode do the required operations
- **Step9:**
 - When write log shows backup ok and “write Result Indicator” turns green means Write IMEI and set clean boot OK. IMEI input console will pop up allows you do same operation in next phone. See next page for detail information.

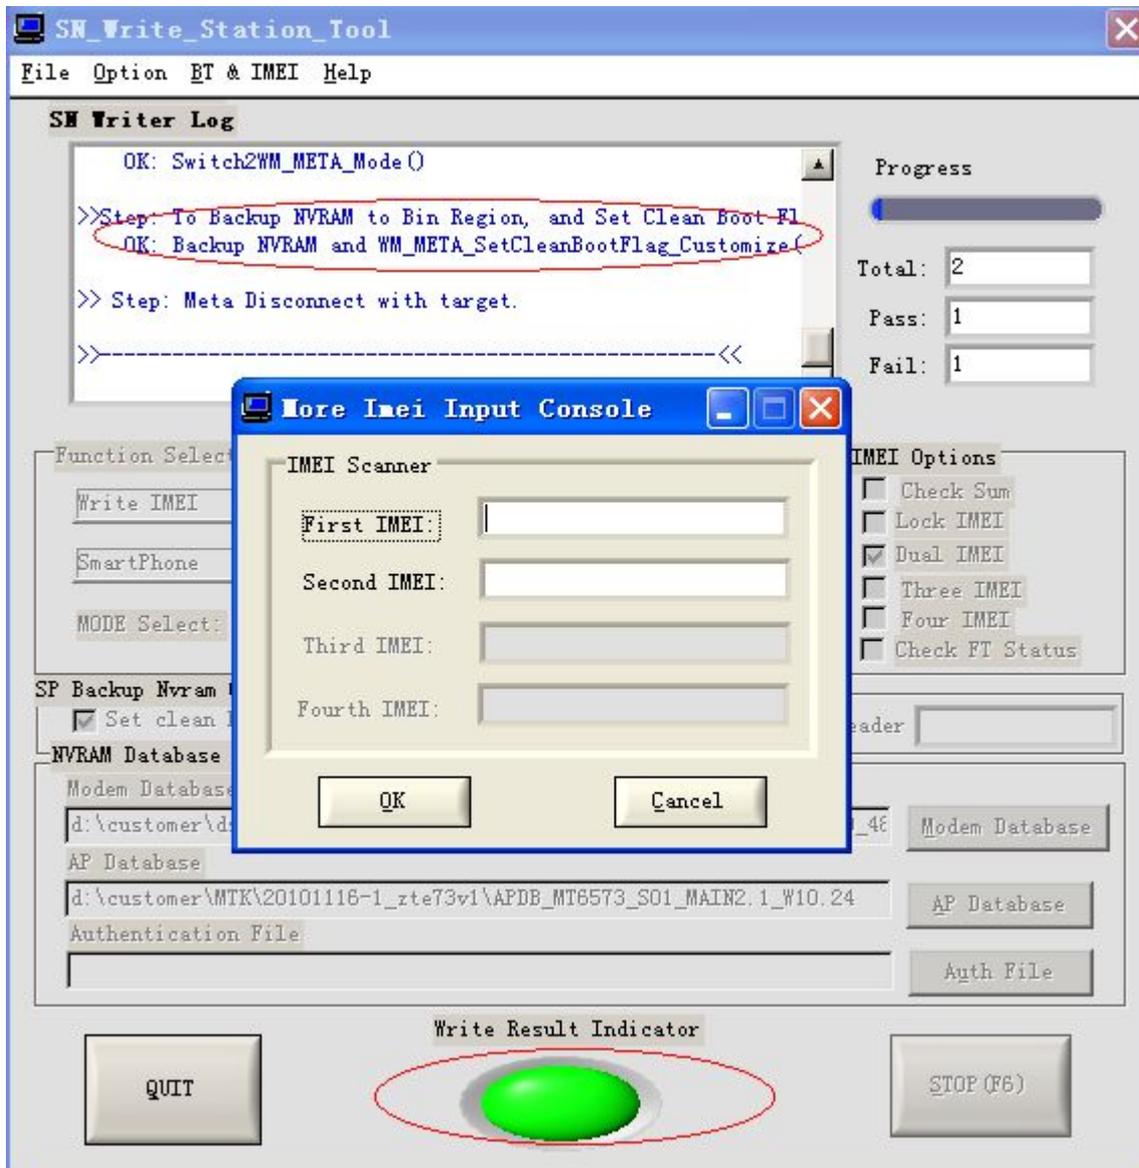

Thanks

