

Chapters 12 and 13


A Display Model and Graphics Classes

John Keyser's
Modifications of Slides by
Bjarne Stroustrup
www.stroustrup.com/Programming

Goal of this

- Graphics library allows us to explore some core object-oriented concepts.
 - Interesting language features
 - What you see is what you get
 - Direct relation between concepts, code, output
- Graphics can be both fun and useful
 - Lets you make more interesting output, potentially
 - Warning: this is not a “real” graphics course!

Display model

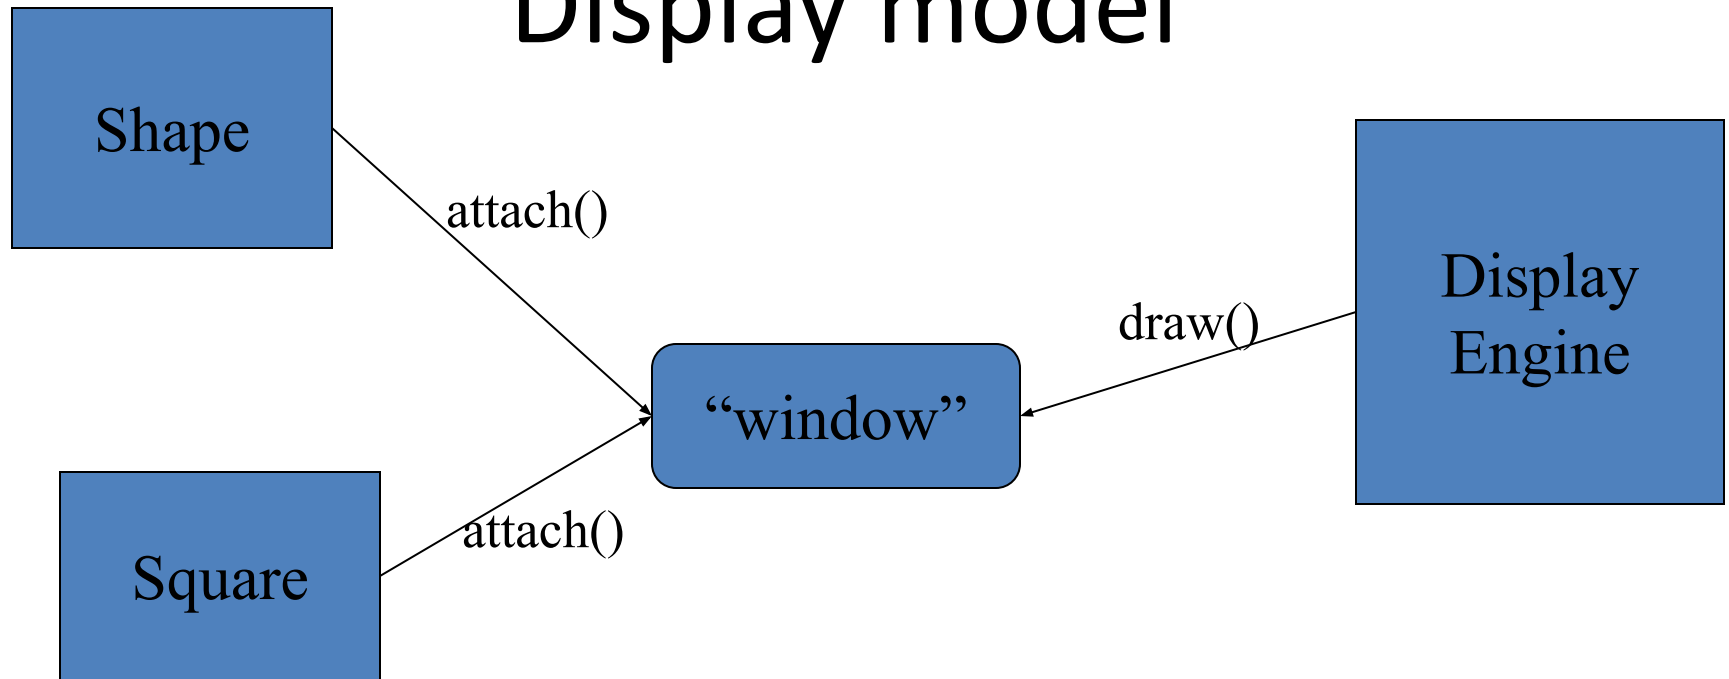

- Objects (such as graphs) are “attached to” a window.
- The “display engine” invokes display commands (such as “draw line from x to y”) for the objects in a window
- Objects such as Square contain vectors of lines, text, etc. for the window to draw


Display model

- An example illustrating the display model

```
int main()
{
    using namespace Graph_lib; // use our graphics interface library
    Point tl(100,200);         // a point (obviously)
    Simple_window win(tl,600,400,"Canvas"); // make a simple window
    Polygon poly;             // make a shape (a polygon, obviously)
    poly.add(Point(300,200)); // add three points to the polygon
    poly.add(Point(350,100));
    poly.add(Point(400,200));

    poly.set_color(Color::red); // make the polygon red (obviously)
    win.attach(poly);           // connect poly to the window
    win.wait_for_button();     // give control to the display engine
}
```

The resulting screen

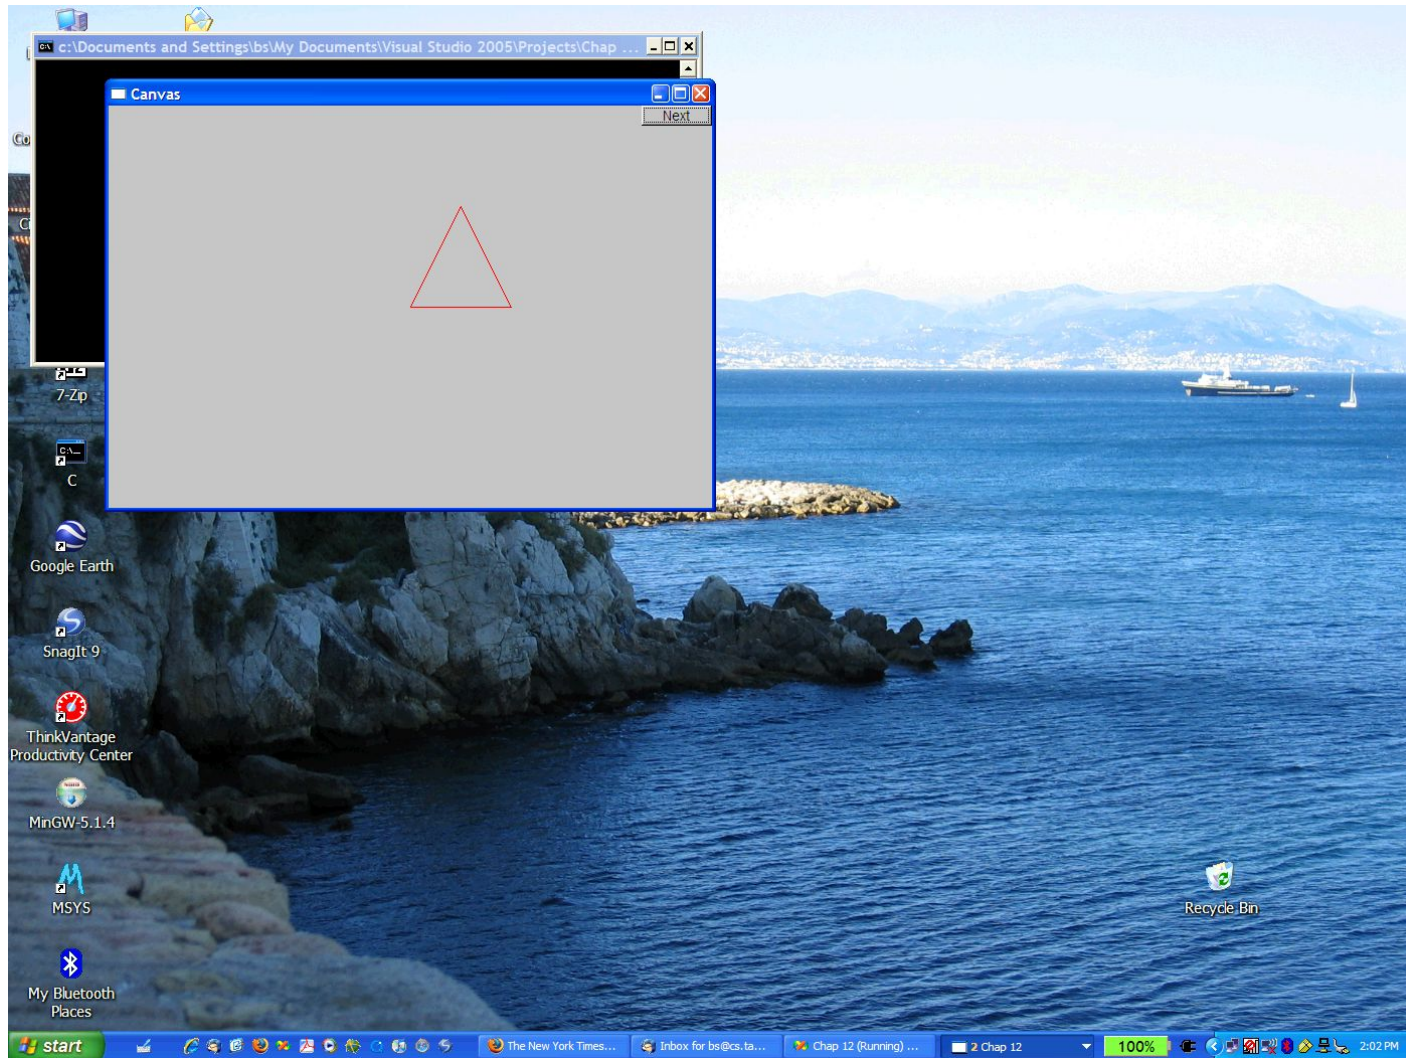


Graphics/GUI libraries

- You'll be using a few interface classes we wrote
 - Interfacing to a popular GUI toolkit
 - GUI == Graphical User Interface
 - FLTK: www.fltk.org // *Fast Light Tool Kit*
 - Installation, etc.
 - See Appendix D and ask instructor/friend
 - FLTK
 - GUI and graphics classes developed for this course
 - Project settings
- This model is far simpler than common toolkit interfaces
 - The FLTK (very terse) documentation is 370 pages
 - Our interface library is <20 classes and <500 lines of code
 - You can write a lot of code with these classes
 - And you can build more classes on them

Graphics/GUI libraries (cont.)


- The code is portable
 - Windows, Unix, Mac, etc.
- This model extends to most common graphics and GUI uses
- The general ideas can be used with any popular GUI toolkit
 - Once you understand the graphics classes you can easily learn any GUI/graphics library
 - Well, relatively easily – these libraries are huge

Graphics/GUI libraries

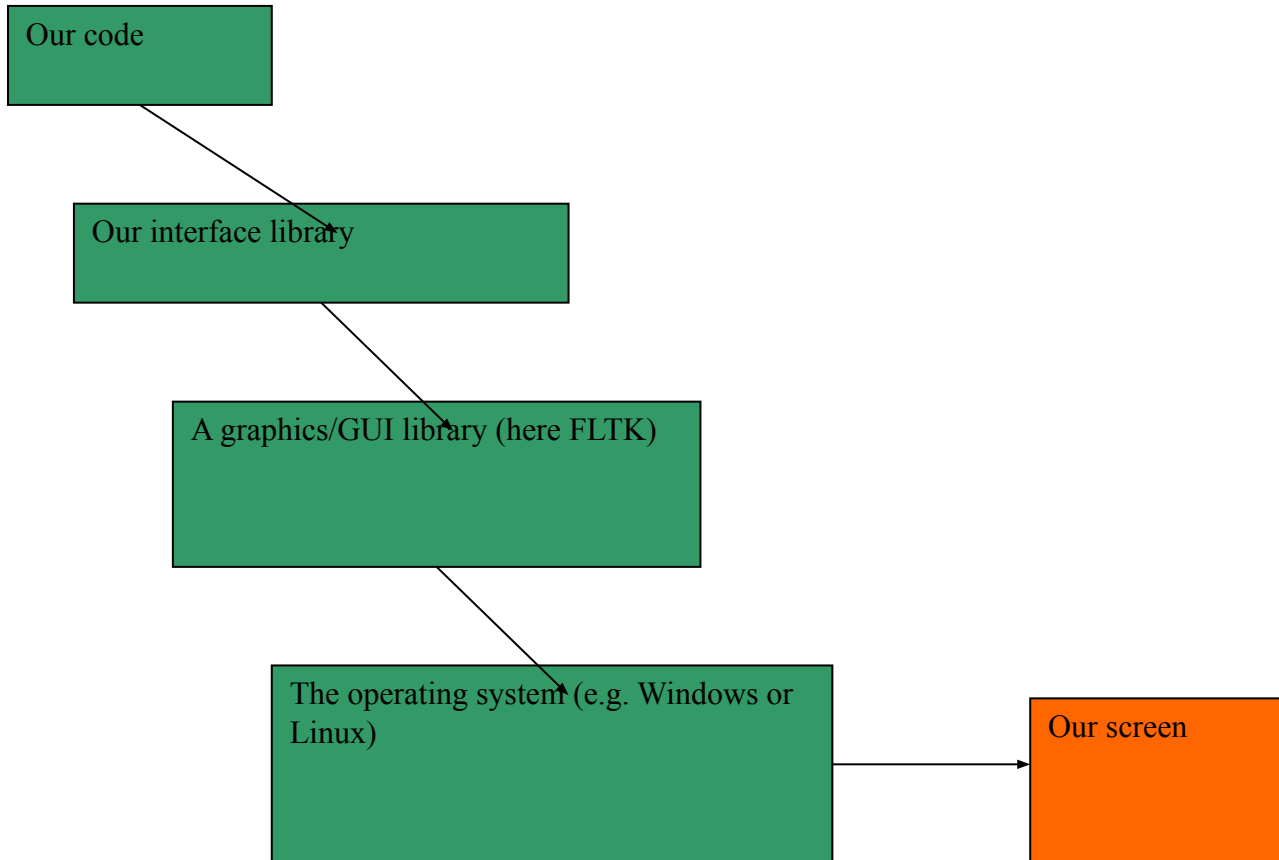

- Often called “a layered architecture”

Interface classes

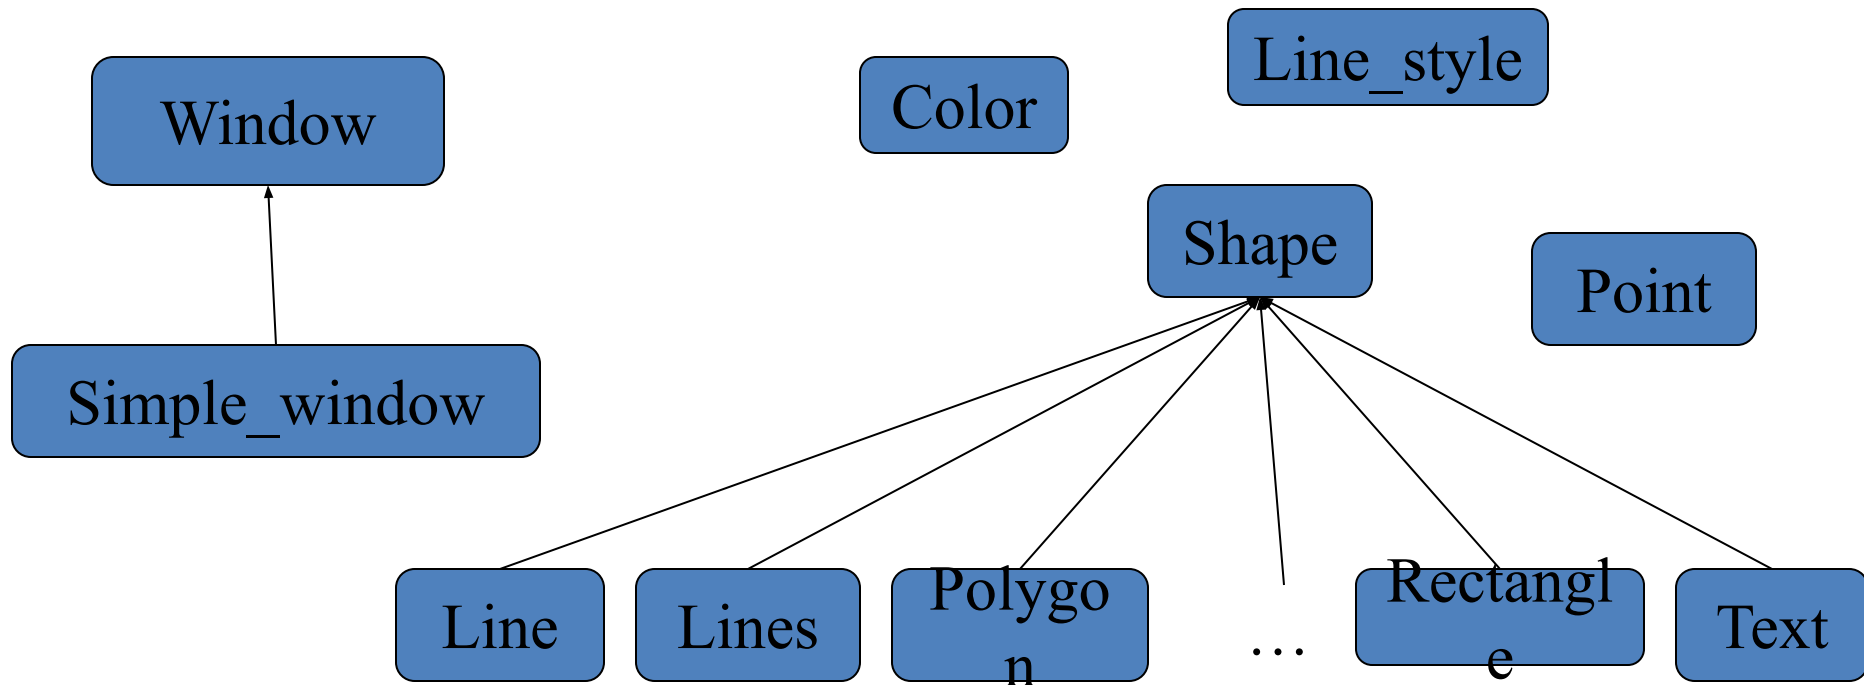


- An arrow \longrightarrow means “is a kind of”
- **Color**, **Line_style**, and **Point** are “utility classes” used by the other classes
- **Window** is our interface to the GUI library (which is our interface to the screen)

Interface classes

- Current
 - Color, Line_style, Font, Point,
 - Window, Simple_window
 - Shape, Text, Polygon, Line, Lines, Rectangle, ...
 - Axis
- Easy to add (for some definition of “easy”)
 - Grid, Block_chart, Pie_chart, etc.
- Later, GUI
 - Button, In_box, Out_box, ...

Coordinates

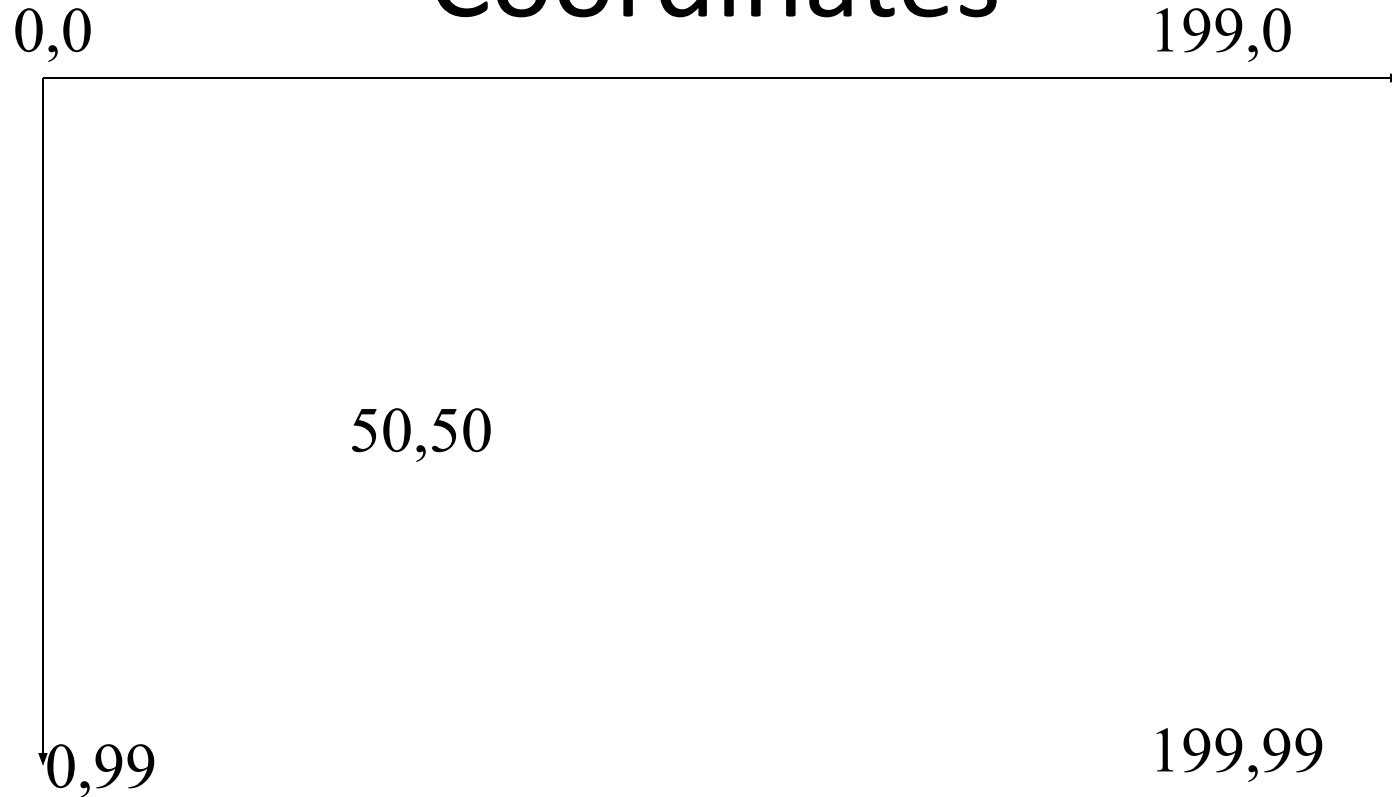


- Oddly, y-coordinates “grow downwards” // *right, down*
- Coordinates identify pixels in the window on the screen
- You can resize a window (changing **x_max()** and **y_max()**)

Demo code 1

```
// Getting access to the graphics system (don't forget to install):  
#include "Simple_window.h" // stuff to deal with your system's windows  
#include "Graph.h" // graphical shapes  
  
using namespace Graph_lib; // make names available  
  
// in main():  
  
Simple_window win(Point(100,100),600,400,"Canvas");  
    // screen coordinate (100,100) is top left corner of window  
    // window size(600 pixels wide by 400 pixels high)  
    // title: Canvas  
win.wait_for_button(); // Display!
```


A “blank canvas”

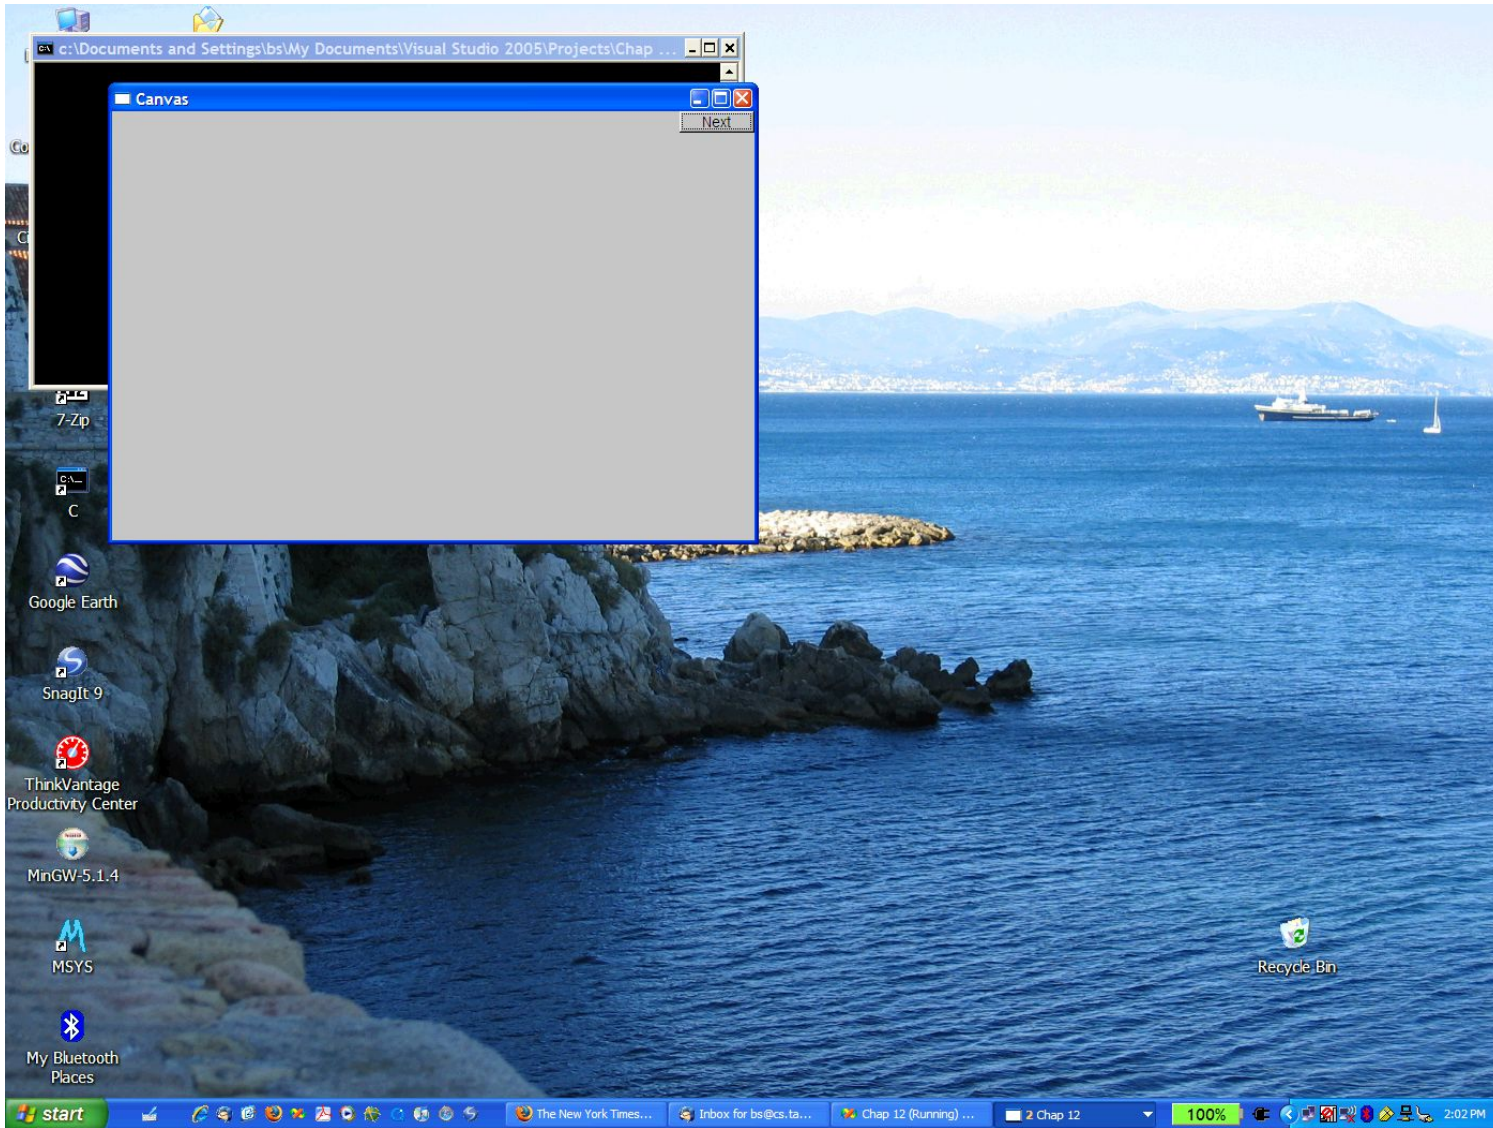

Demo code 2

```
Axis xa(Axis::x, Point(20,300), 280, 10, "x axis");  
// make an Axis  
// an axis is a kind of Shape  
// Axis::x means horizontal  
// starting at (20,300)  
// 280 pixels long  
// 10 "notches" ("tick marks")  
// text "x axis"  
win.set_label("Canvas #2");  
win.attach(xa); // attach axis xa to the window  
win.wait_for_button();
```

Add an X-axis

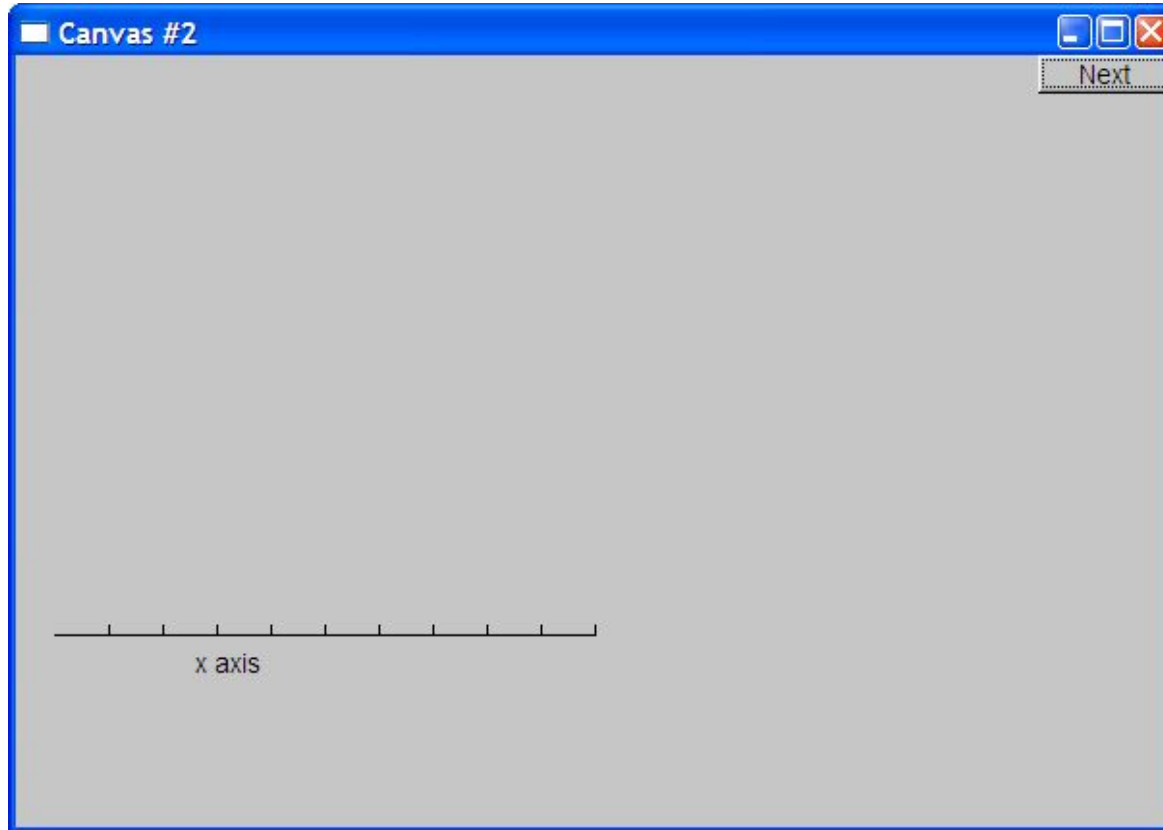

Demo code 3

```
win.set_label("Canvas #3");
```

```
Axis ya(Axis::y, Point(20,300), 280, 10, "y axis");
```


```
ya.set_color(Color::cyan);    // choose a color for the axis
```

```
ya.label.set_color(Color::dark_red);    // choose a color for the text
```

```
win.attach(ya);
```

```
win.wait_for_button();
```


Add a Y-axis (colored)

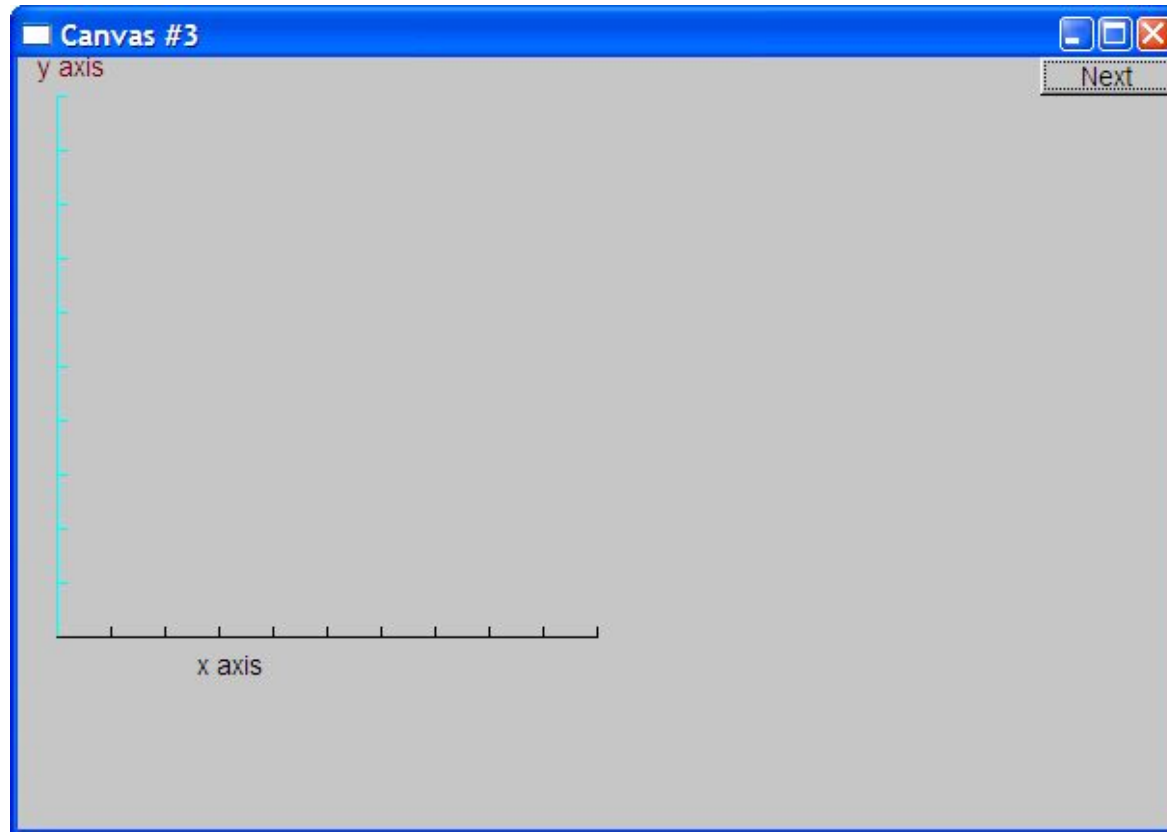

Yes, it's ugly, but this is a programming course, not a graphics design course
Stroustrup/Programming

Demo code 4

```
win.set_label("Canvas #4");
```

```
Function sine(sin,0,100,Point(20,150),1000,50,50); // sine curve
```

```
    // plot sin() in the range [0:100)
```

```
    // with (0,0) at (20,150)
```


```
    // using 1000 points
```

```
    // scale x values *50, scale y values *50
```

```
win.attach(sine);
```

```
win.wait_for_button();
```

Add a sine curve

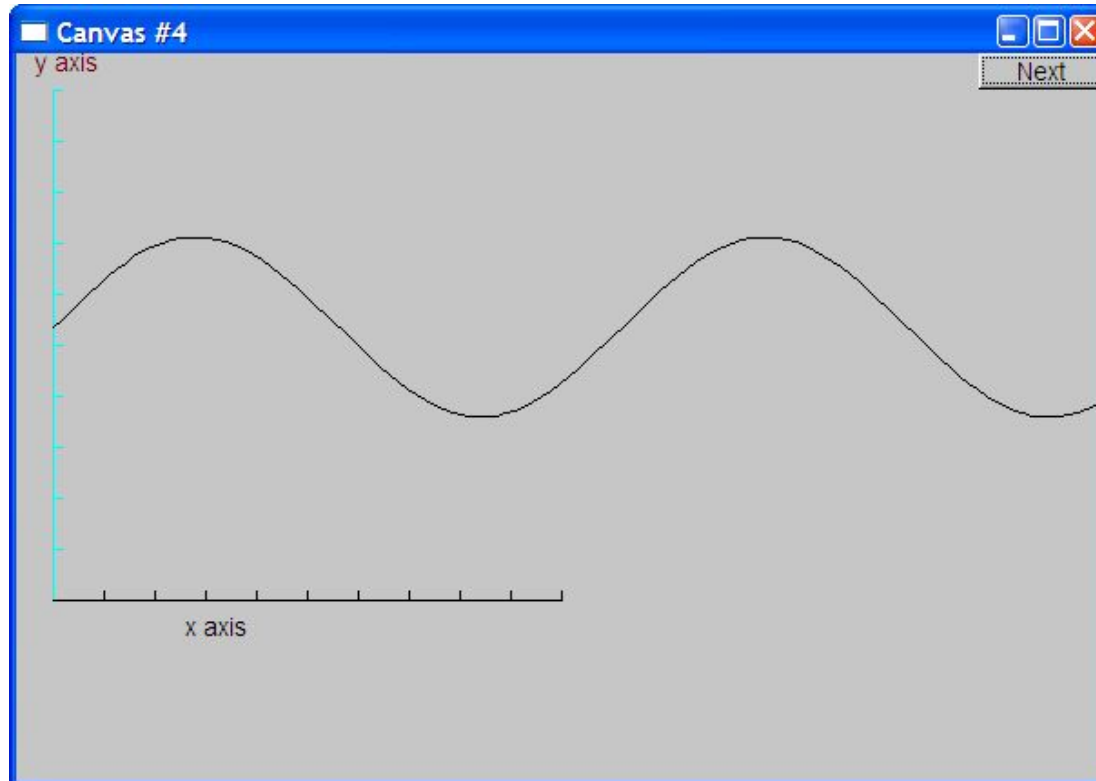

Demo code 5

```
win.set_label("Canvas #5");
```

```
sine.set_color(Color::blue);    // I changed my mind about sine's color
```

```
Polygon poly;                  // make a polygon (a kind of Shape)
```

```
poly.add(Point(300,200)); // three points make a triangle
```

```
poly.add(Point(350,100));
```

```
poly.add(Point(400,200));
```


```
poly.set_color(Color::red);    // change the color
```

```
poly.set_style(Line_style::dash); // change the line style
```

```
win.attach(poly);
```

```
win.wait_for_button();
```

Add a triangle (and color the curve)

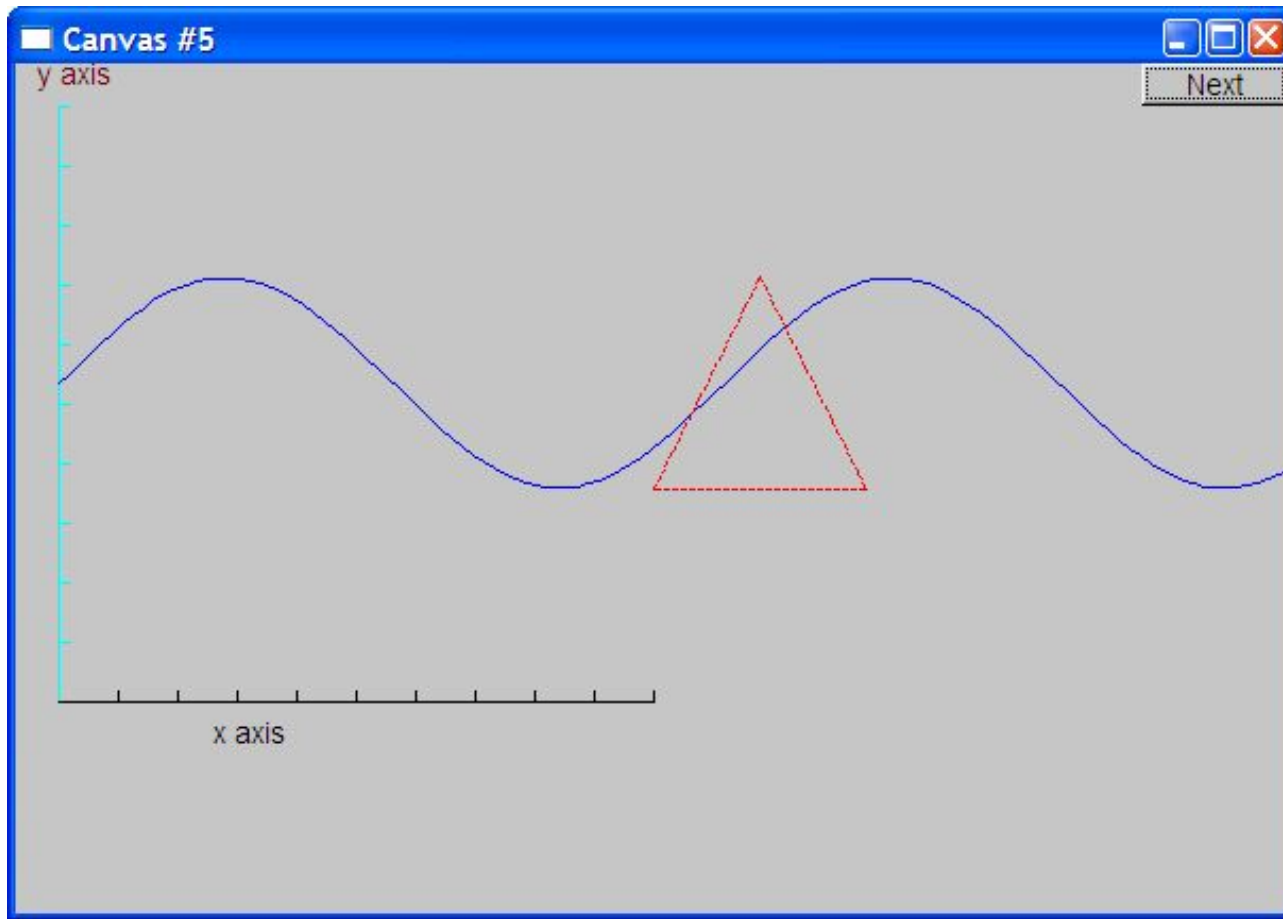

Demo code 6


```
win.set_label("Canvas #6");
```

```
Rectangle r(Point(200,200), 100, 50);    // top left point, width,  
height
```

```
win.attach(r);
```

```
win.wait_for_button();
```

Add a rectangle

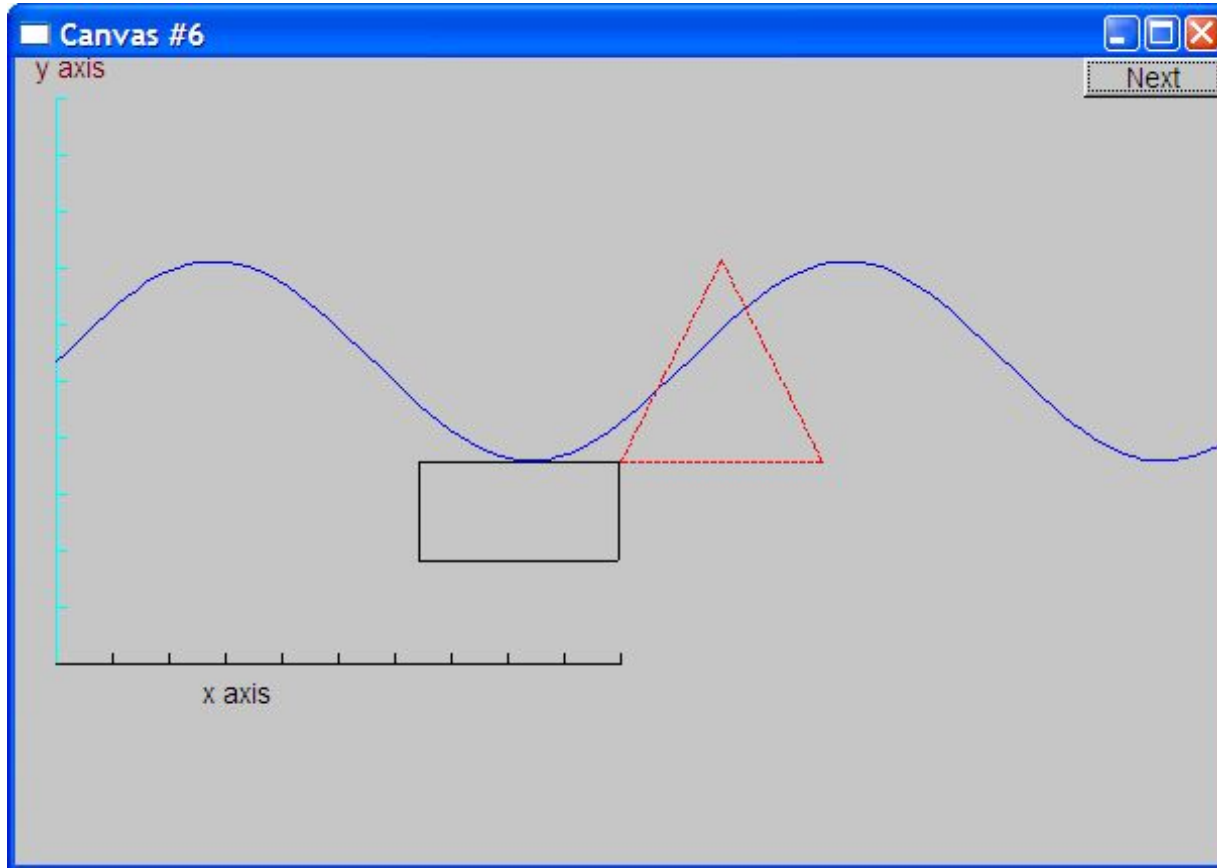


Demo code 6.1

- Add a shape that looks like a rectangle

```
Closed_polyline poly_rect;  
poly_rect.add(Point(100,50));  
poly_rect.add(Point(200,50));  
poly_rect.add(Point(200,100));  
poly_rect.add(Point(100,100));
```

```
win.set_label("Canvas #6.1");
```


Add a shape that looks like a rectangle

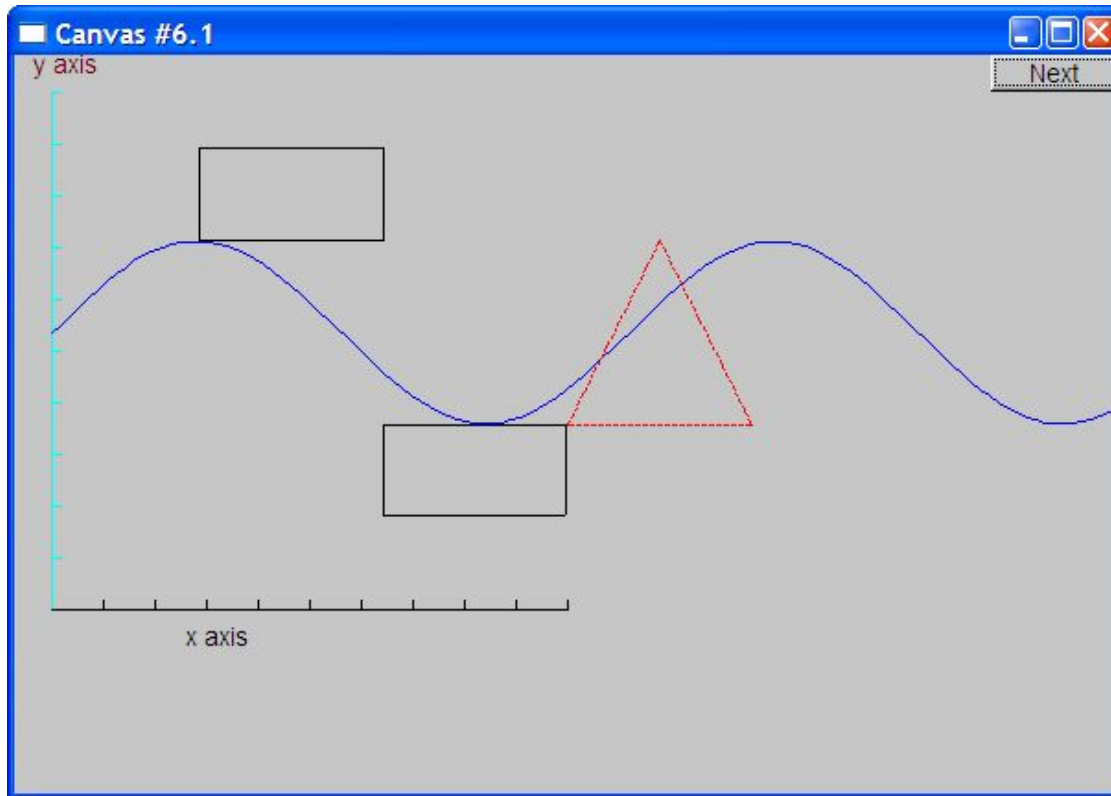

But is it a rectangle?

Demo code 6.2


- We can add a point

```
poly_rect.add(Point(50,75); // now poly_rect has 5 points
```

```
win.set_label("Canvas #6.2");
```

- “looking like” is not the same as “is”

Obviously a polygon

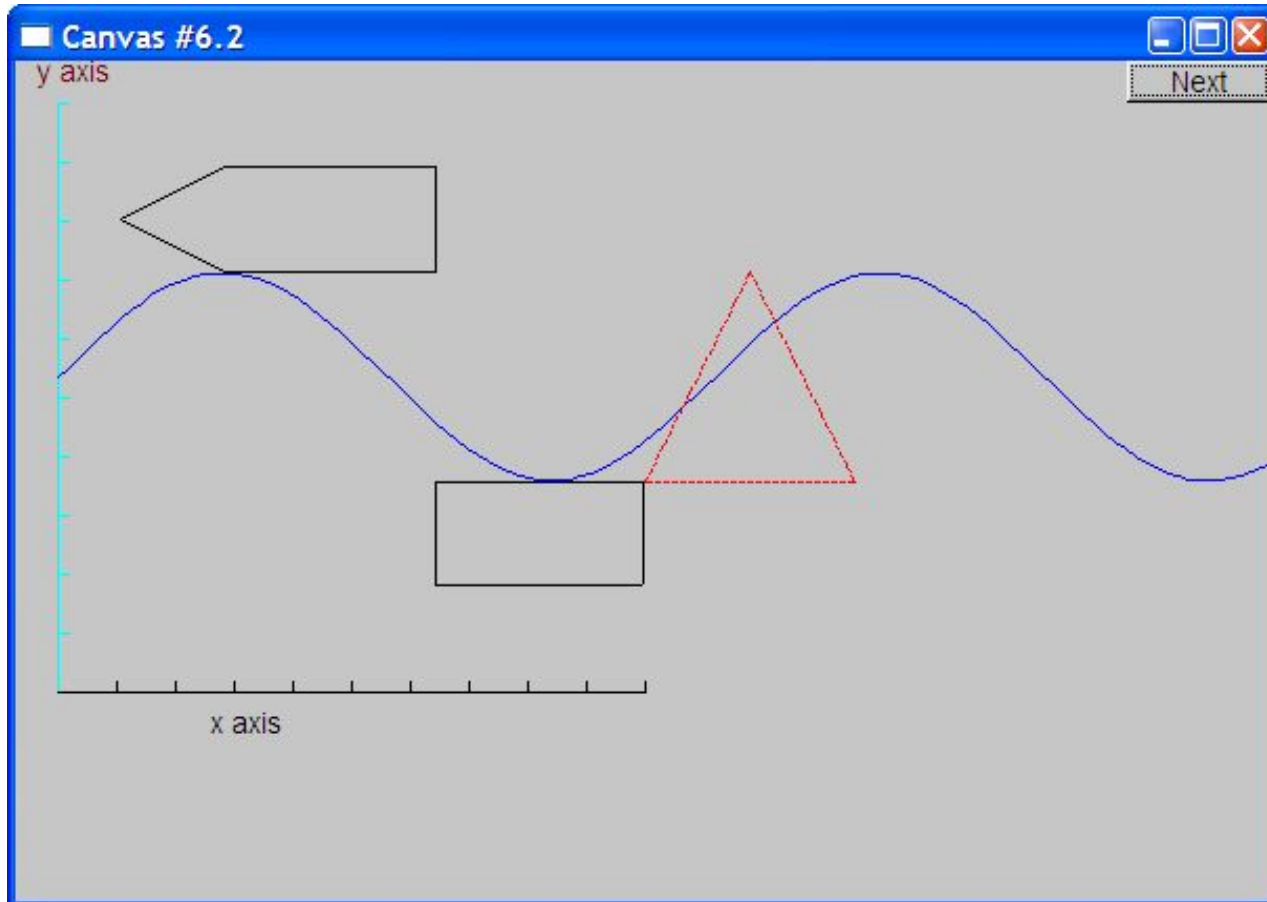

Add fill

```
r.set_fill_color(Color::yellow); // color the inside of the rectangle
```


```
poly.set_style(Line_style(Line_style::dash,4)); // make the triangle fat
```

```
poly_rect.set_fill_color(Color::green);
```

```
poly_rect.set_style(Line_style(Line_style::dash,2));
```

```
win.set_label("Canvas #7");
```

Add fill

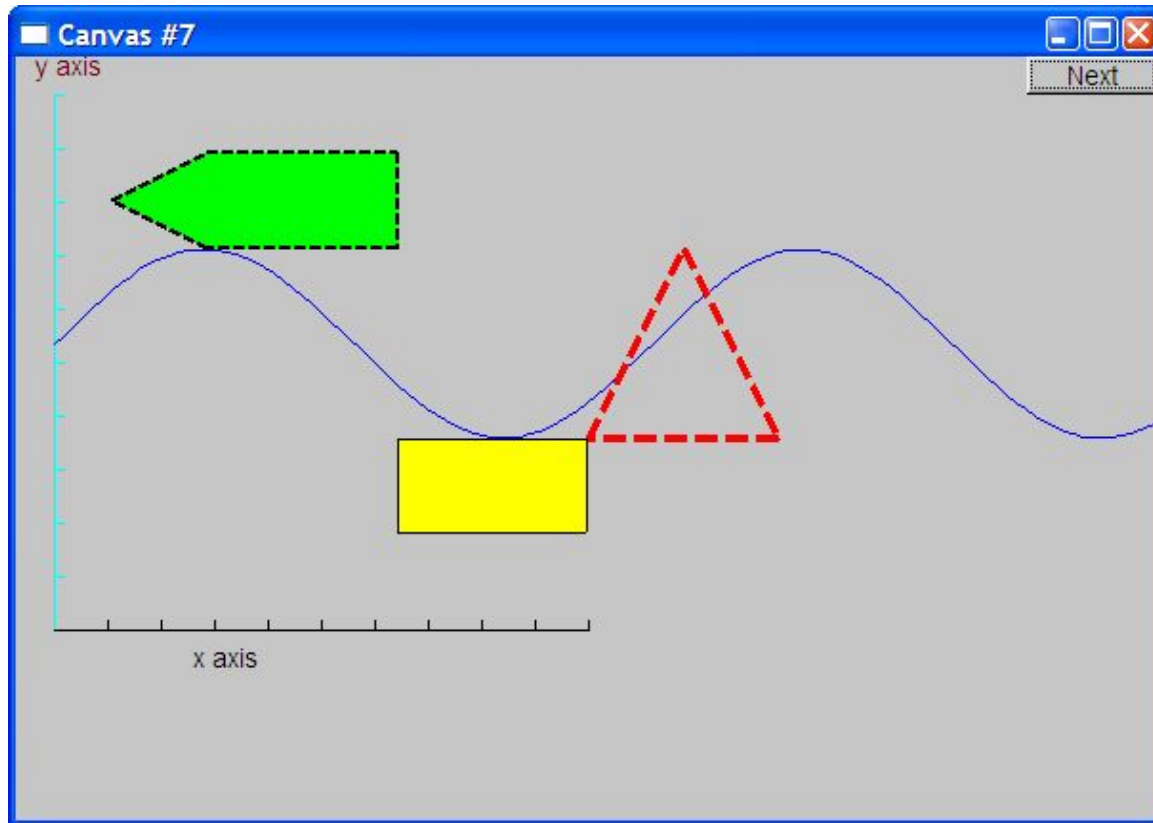


Demo Code 8

```
Text t(Point(100,100),"Hello, graphical world!"); // add text  
// point is lower left corner on the baseline
```

```
win.set_label("Canvas #8");
```

Add text

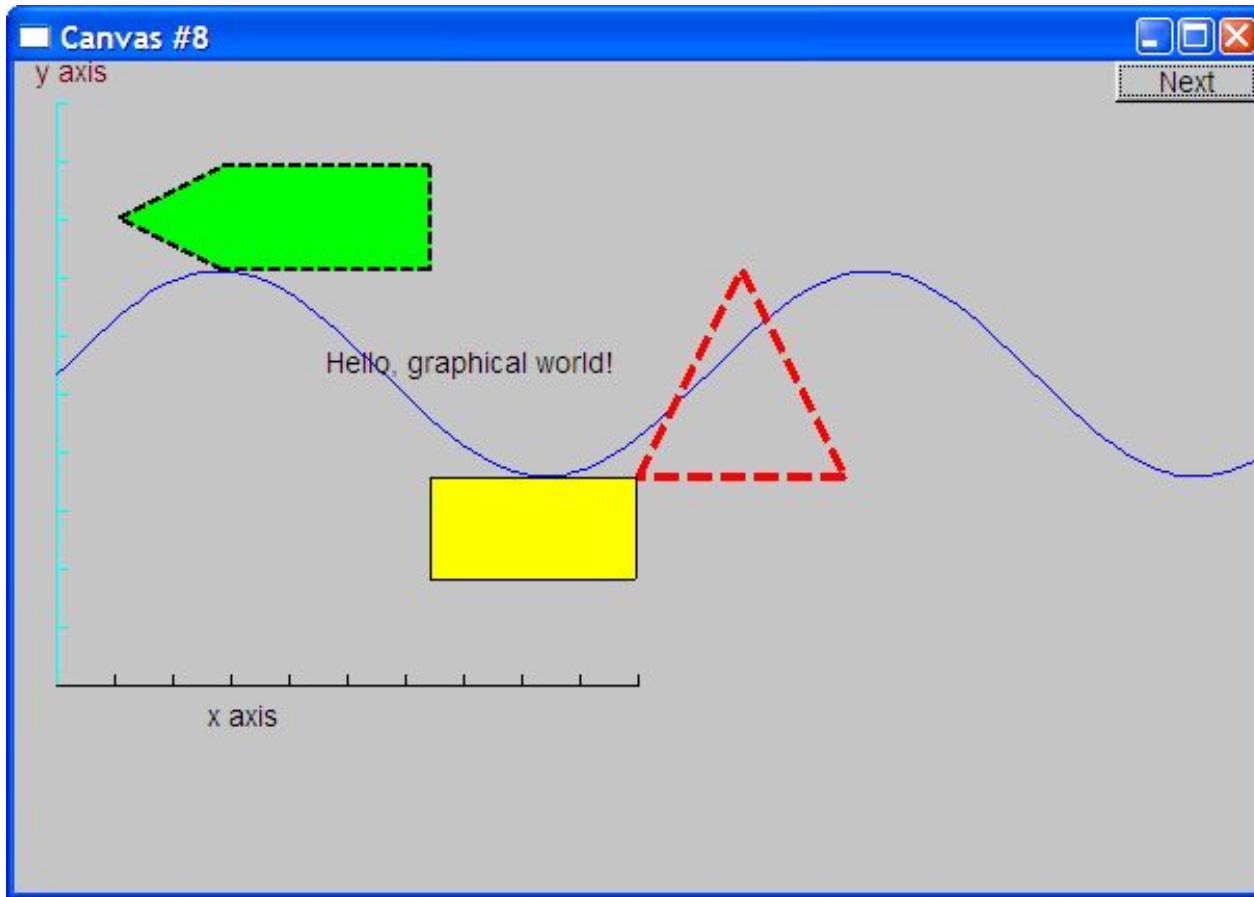


Demo Code 9

■ Modify text font and size

```
t.set_font(Font::times_bold);  
t.set_font_size(20); // height in pixels
```



Text font and size

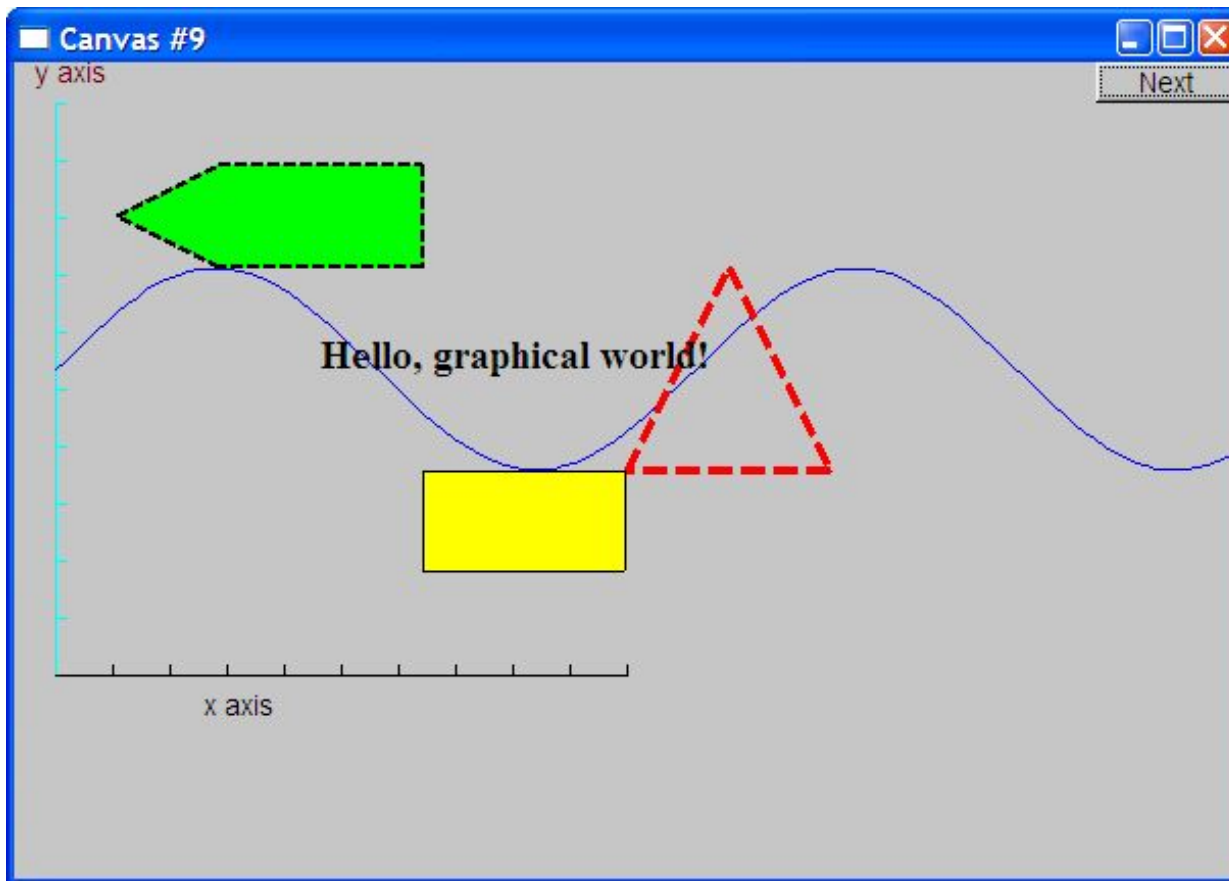

Add an image

```
Image ii(Point(100,50),"image.jpg");    // open an image file  
win.attach(ii);  
win.set_label("Canvas #10");
```

Add an image

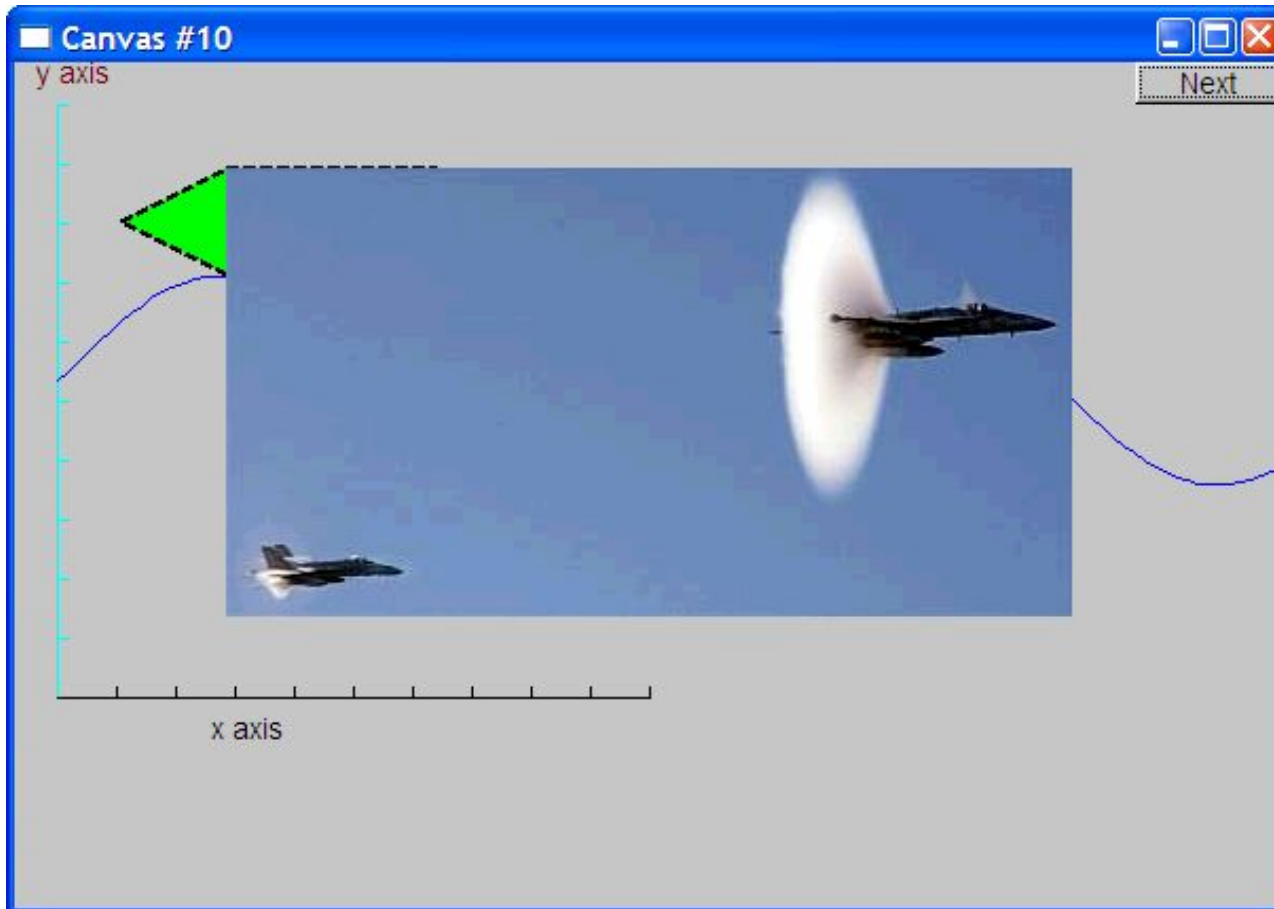

Oops!


- The image obscures the other shapes
 - Move it a bit out of the way

```
ii.move(100,200); // move 100 pixels to the right (-100 moves left)  
                // move 200 pixels down (-200 moves up)
```

```
win.set_label("Canvas #11");
```

```
win.wait_for_button();
```

Move the image

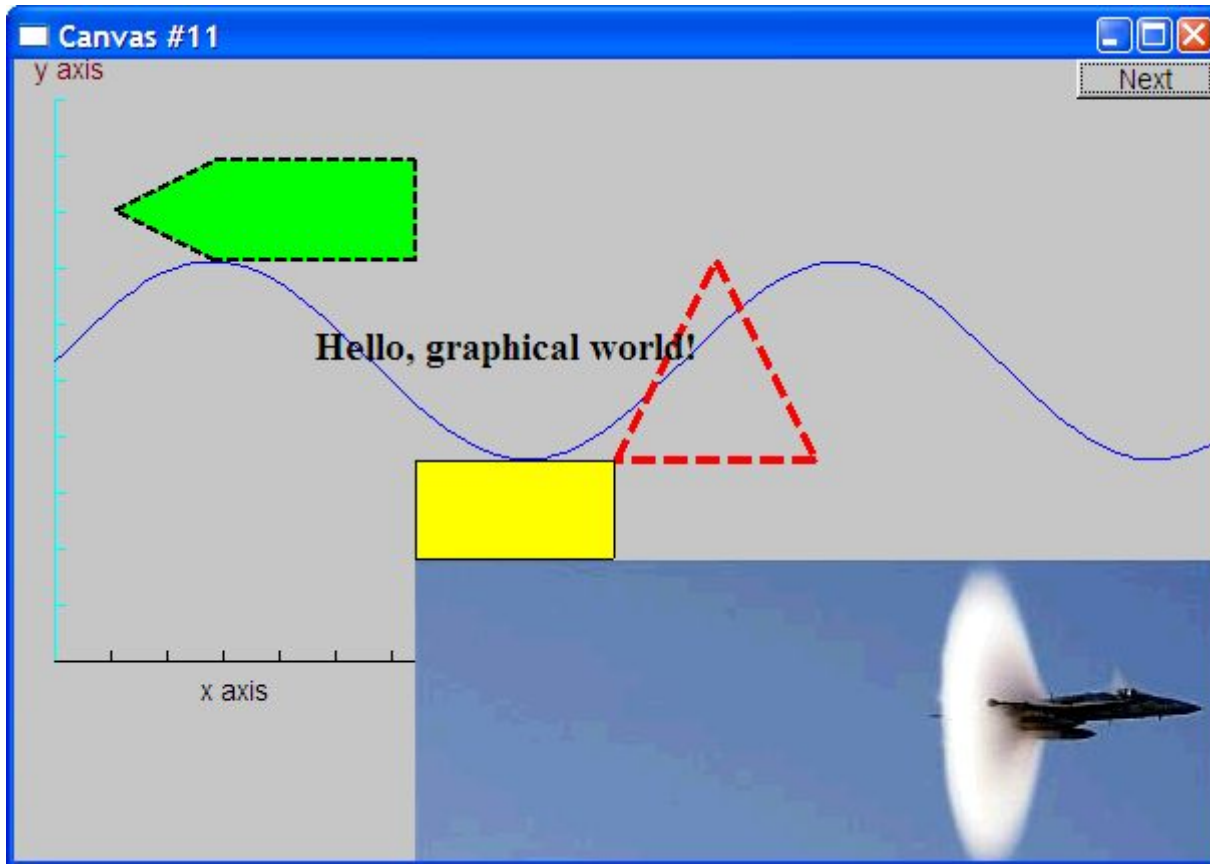


Note how the parts of a shape that don't fit in the window are "clipped" away

Demo Code 12

```
Circle c(Point(100,200),50);    // center, radius
Ellipse e(Point(100,200), 75,25);    // center, horizontal radius, vertical radius
e.set_color(Color::dark_red);
Mark m(Point(100,200),'x');
ostream oss;
oss << "screen size: " << x_max() << "*" << y_max()
    << "; window size: " << win.x_max() << "*" << win.y_max();
Text sizes(Point(100,20),oss.str());
Image cal(Point(225,225), "snow_cpp.gif"); // 320*240 pixel gif
cal.set_mask(Point(40,40),200,150);    // display center of image

win.set_label("Canvas #12");
win.wait_for_button();
```

Add shapes, more text

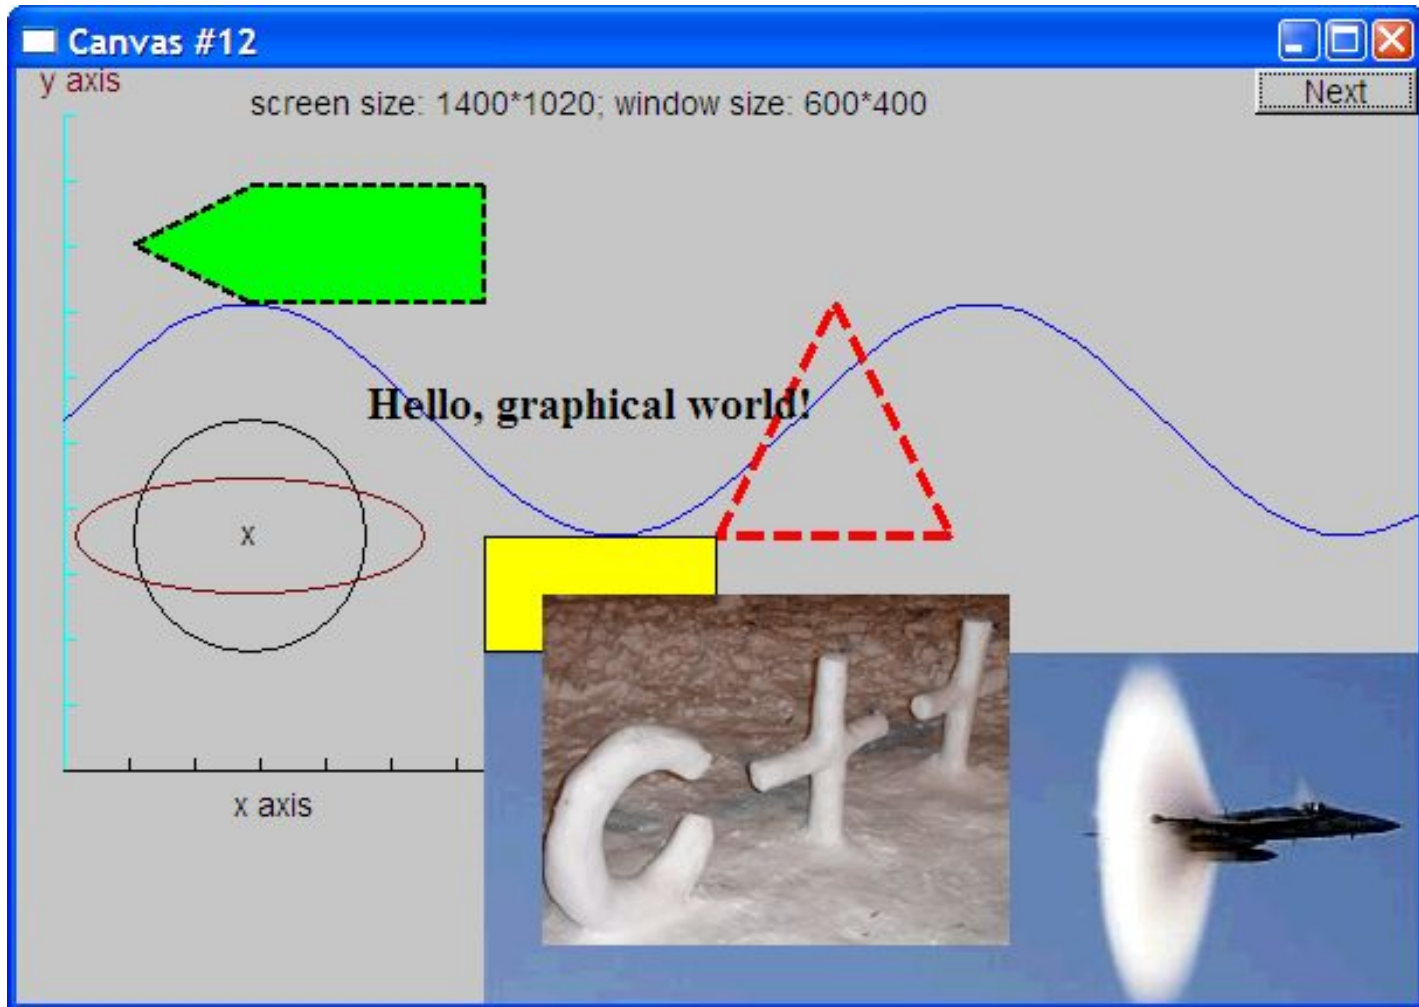

Boiler plate


```
#include "Graph.h"           // header for graphs
#include "Simple_window.h"   // header containing window interface

int main ()
try
{
    // the main part of your code
}
catch(exception& e) {
    cerr << "exception: " << e.what() << '\n';
    return 1;
}
catch (...) {
    cerr << "Some exception\n";
    return 2;
}
```


Primitives and algorithms


- The demo shows the use of library primitives
 - Just the primitives
 - Just the use
- Typically what we display is the result of
 - an algorithm
 - reading data
- Now we will look a bit more at how some of this is implemented.

Display model

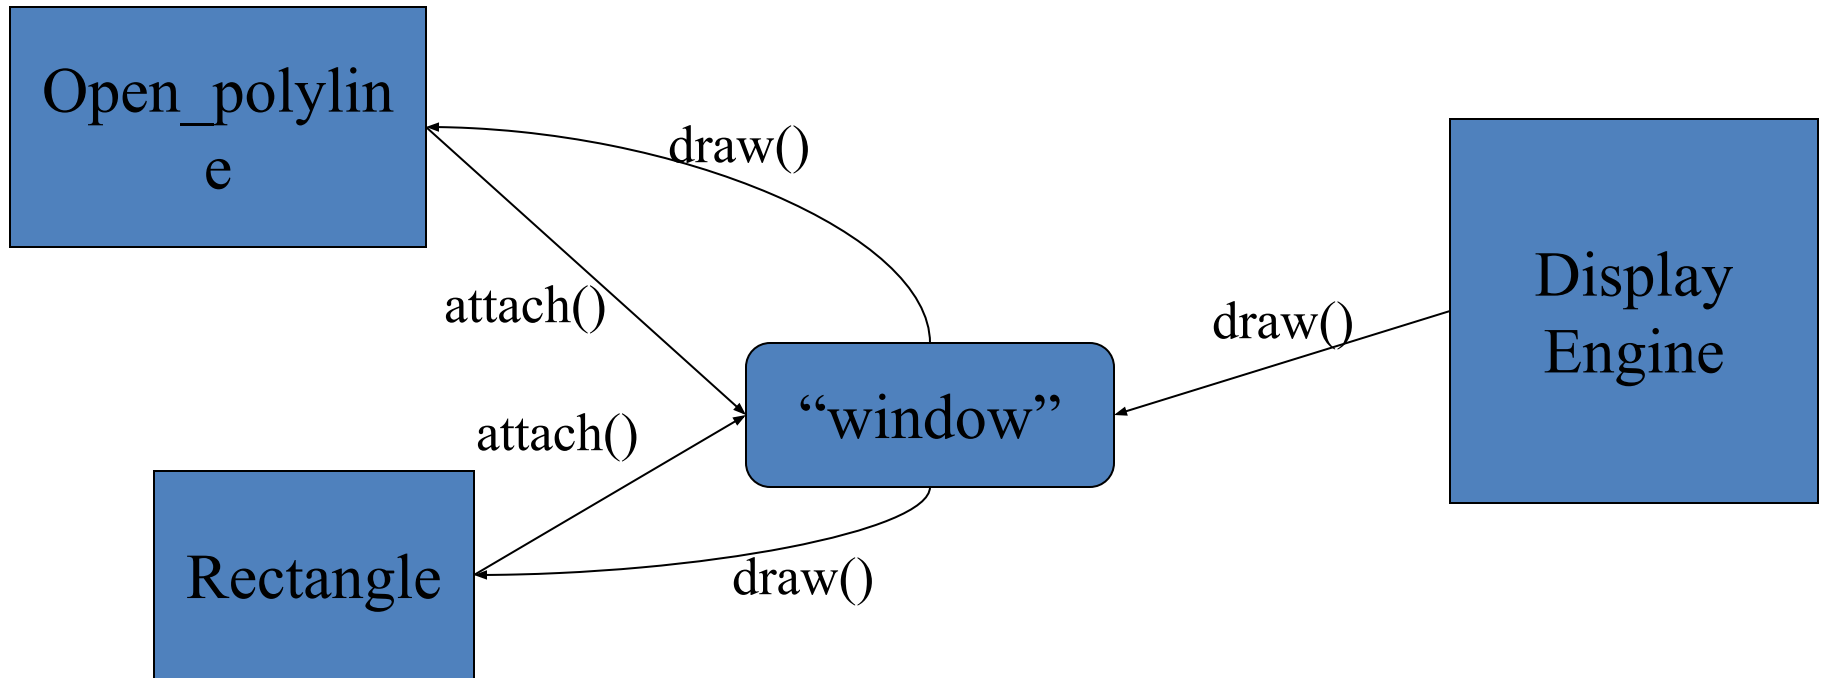

- Objects (such as graphs) are “attached to” (“placed in”) a window.
- The “display engine” invokes display commands (such as “draw line from x to y”) for the objects in a window
- Objects such as Rectangle add vectors of lines to the window to draw

Code organization

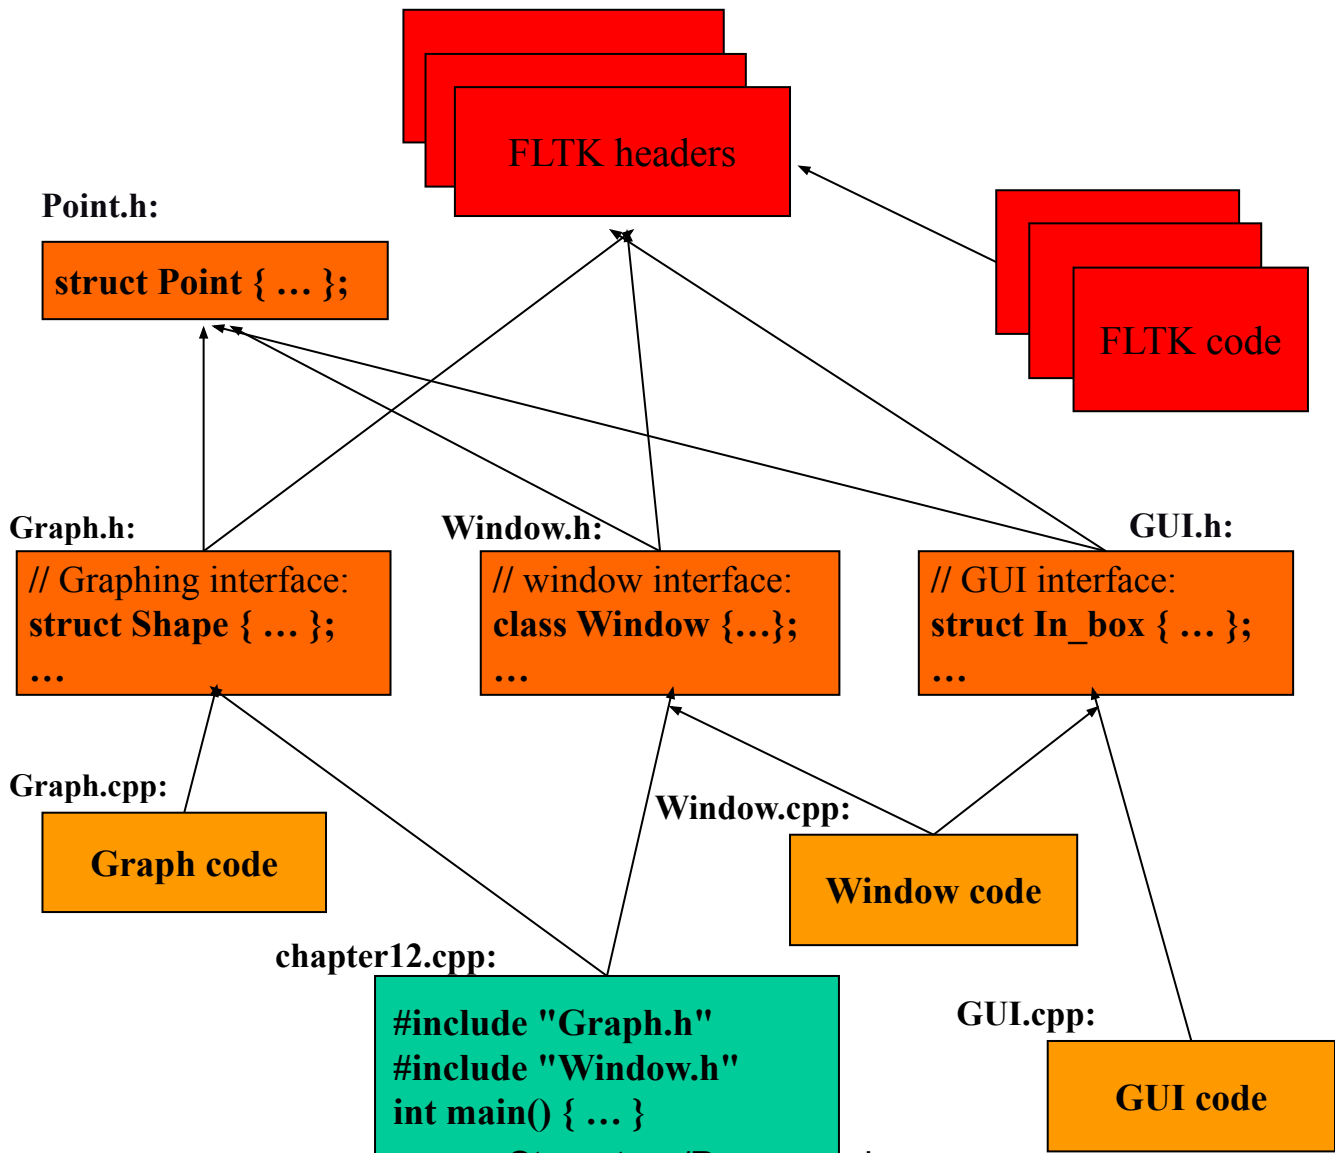

Source files

- Header
 - File that contains interface information (declarations)
 - **#include** in user and implementer
- .cpp (“code file” / “implementation file”)
 - File that contains code implementing interfaces defined in headers and/or uses such interfaces
 - **#includes** headers
- Read the **Graph.h** header
 - And later the **Graph.cpp** implementation file
- Don’t read the **Window.h** header or the **Window.cpp** implementation file
 - Naturally, some of you will take a peek
 - Beware: heavy use of yet unexplained C++ features

Design note

- The ideal of program design is to represent concepts directly in code
 - We take this ideal very seriously
- For example:
 - **Window** – a window as we see it on the screen
 - Will look different on different operating systems (not our business)
 - **Line** – a line as you see it in a window on the screen
 - **Point** – a coordinate point
 - **Shape** – what's common to shapes
 - (imperfectly explained for now; all details in Chapter 14)
 - **Color** – as you see it on the screen

Point

```
namespace Graph_lib    // our graphics interface is in Graph_lib
{
    struct Point        // a Point is simply a pair of ints (the coordinates)
    {
        int x, y;
        Point(int xx, int yy) : x(xx), y(yy) { }
    };                // Note the ';'
}
```

Line

```
struct Shape {  
    // hold lines represented as pairs of points  
    // knows how to display lines  
};  
  
struct Line : Shape    // a Line is a Shape defined by just two Points  
{  
    Line(Point p1, Point p2);  
};  
  
Line::Line(Point p1, Point p2) // construct a line from p1 to p2  
{  
    add(p1); // add p1 to this shape (add() is provided by Shape)  
    add(p2); // add p2 to this shape  
}
```

Line example

// draw two lines:

using namespace Graph_lib;

Simple_window win(Point(100,100),600,400,"Canvas"); *// make a window*

Line horizontal(Point(100,100),Point(200,100)); *// make a horizontal line*


Line vertical(Point(150,50),Point(150,150)); *// make a vertical line*

win.attach(horizontal); *// attach the lines to the window*

win.attach(vertical);

win.wait_for_button(); *// Display!*

Line example

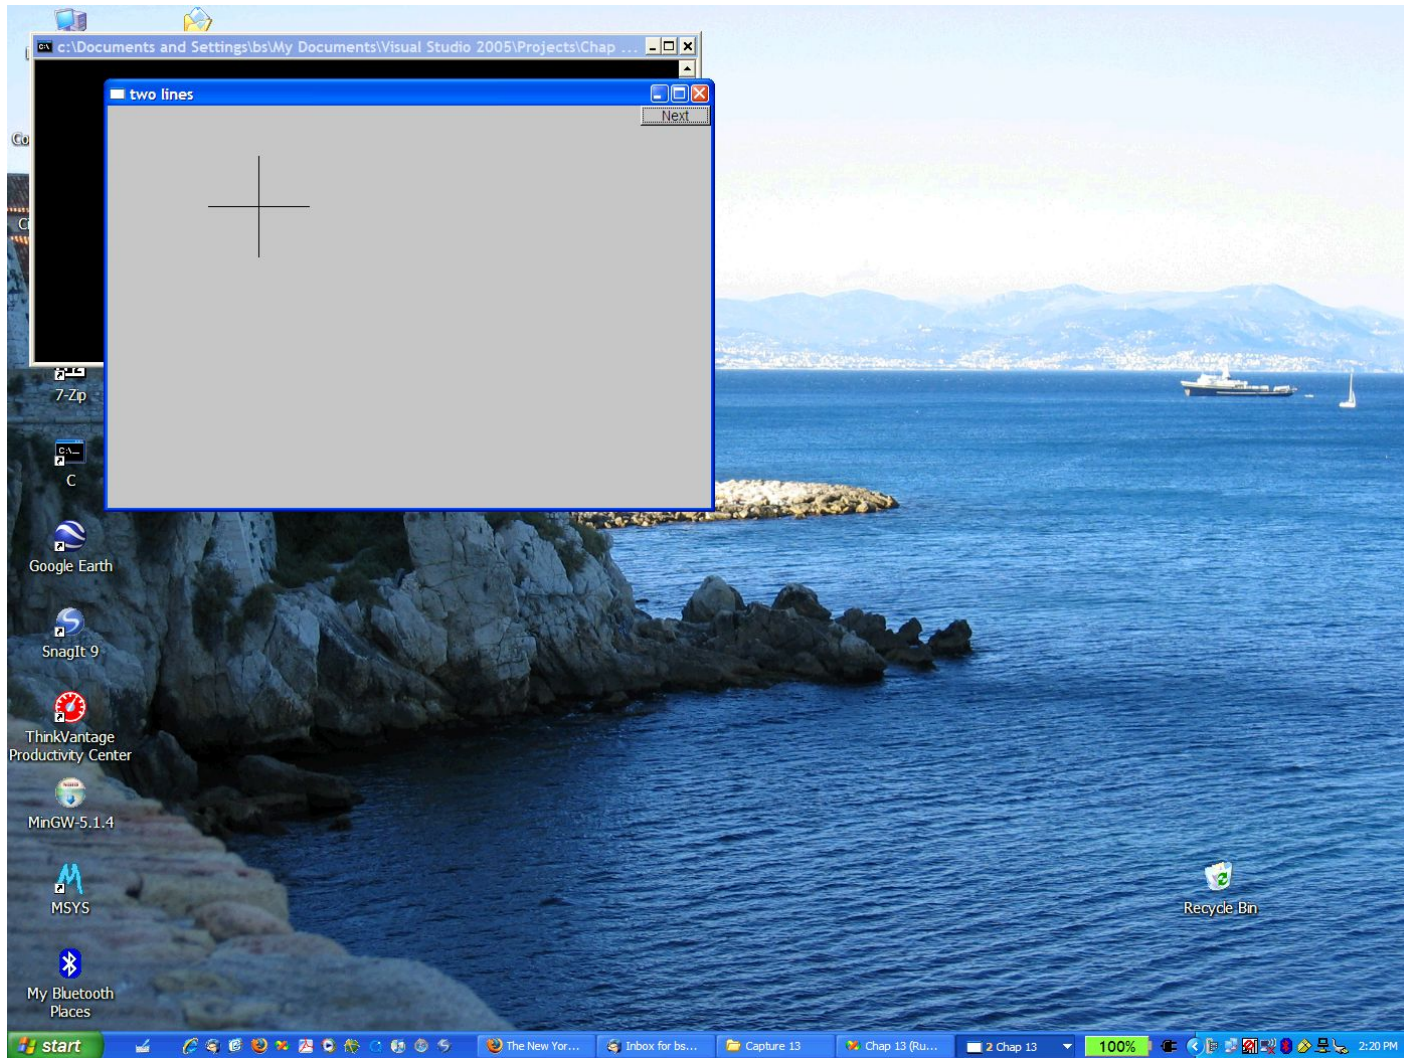

Line example

- Individual lines are independent

```
horizontal.set_color(Color::red);  
vertical.set_color(Color::green);
```



Lines

```
struct Lines : Shape { // a Lines object is a set of lines  
    // We use Lines when we want to manipulate  
    // all the lines as one shape, e.g. move them all  
    // together with one move statement  
    void add(Point p1, Point p2); // add line from p1 to p2  
    void draw_lines() const; // to be called by Window to draw Lines  
};
```

- Terminology:
 - Lines “is derived from” Shape
 - Lines “inherits from” Shape
 - Lines “is a kind of” Shape
 - Shape “is the base” of Lines
- This is the key to what is called “object-oriented programming”
 - We’ll get back to this in Chapter 14

Lines Example

Lines x;


x.add(Point(100,100), Point(200,100)); *// horizontal line*

x.add(Point(150,50), Point(150,150)); *// vertical line*

win.attach(x); *// attach Lines object x to Window win*

win.wait_for_button(); *// Draw!*

Lines example

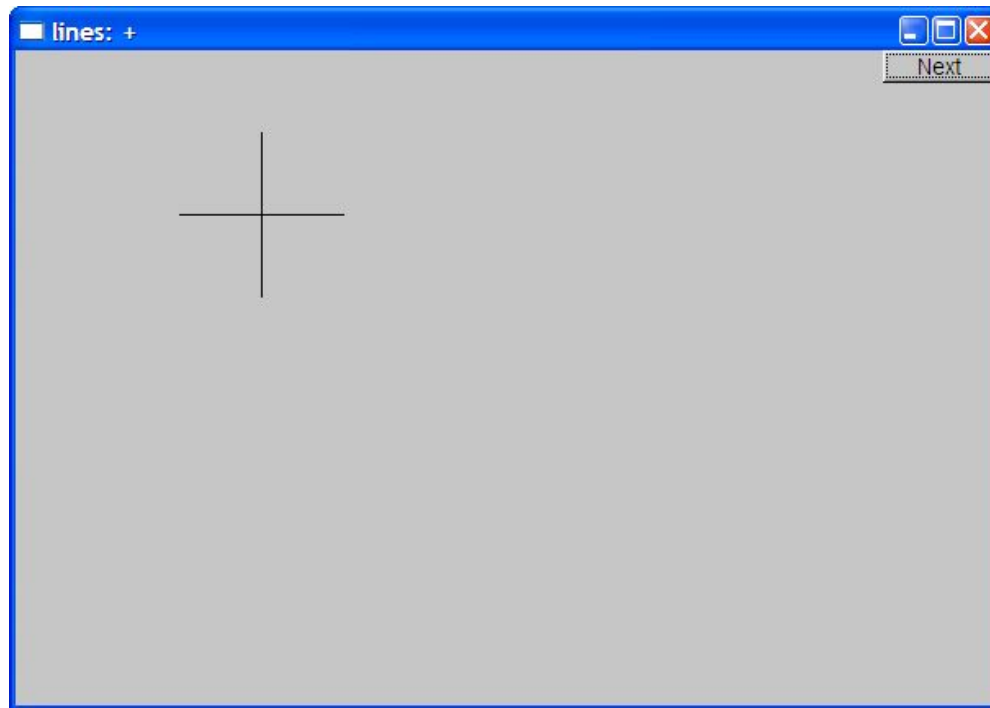

- Looks exactly like the two **Lines** example

Implementation: Lines

```
void Lines::add(Point p1, Point p2) // use Shape's add()
{
    Shape::add(p1);
    Shape::add(p2);
}
```

```
void Lines::draw_lines() const // to somehow be called from Shape
{
    for (int i=1; i<number_of_points(); i+=2)
        fl_line(point(i-1).x, point(i-1).y, point(i).x, point(i).y);
}
```

- Note
 - fl_line is a basic line drawing function from FLTK
 - FLTK is used in the *implementation*, not in the *interface* to our classes
 - We could replace FLTK with another graphics library

Draw Grid

(Why bother with **Lines** when we have **Line**?)

```
// A Lines object may hold many related lines
```

```
// Here we construct a grid:
```

```
int x_size = win.x_max();
```

```
int y_size = win.y_max();
```

```
int x_grid = 80;           // make cells 80 pixels wide
```

```
int y_grid = 40;         // make cells 40 pixels high
```

```
Lines grid;
```

```
for (int x=x_grid; x<x_size; x+=x_grid) // veritcal lines
```


```
    grid.add(Point(x,0),Point(x,y_size));
```

```
for (int y = y_grid; y<y_size; y+=y_grid) // horizontal lines
```

```
    grid.add(Point(0,y),Point(x_size,y));
```

```
win.attach(grid); // attach our grid to our window (note grid is one object)
```

Grid

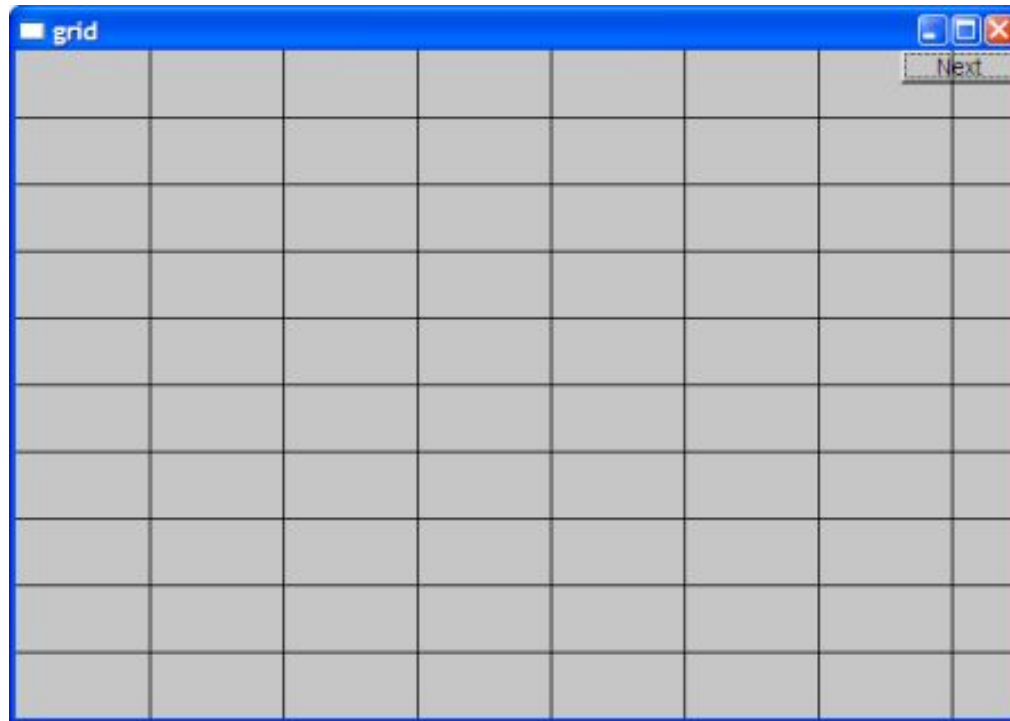


- Oops! Last column is narrow, there's a grid line on top of the Next button, etc.—tweaking required (as usual)

Color

```
struct Color {// Map FLTK colors and scope them;  
    // deal with visibility/transparency  
    enum Color_type { red=FL_RED, blue=FL_BLUE, /* ... */ };  
  
    enum Transparency { invisible=0, visible=255 }; // also called Alpha  
  
    Color(Color_type cc) :c(Fl_Color(cc)), v(visible) { }  
    Color(int cc) :c(Fl_Color(cc)), v(visible) { }  
    Color(Color_type cc, Transparency t) :c(Fl_Color(cc)), v(t) { }  
  
    int as_int() const { return c; }  
  
    Transparency visibility() { return v; }  
    void set_visibility(Transparency t) { v = t; }  
  
private:  
    Fl_Color c;  
    char v;  
};
```

Draw red grid

```
grid.set_color(Color::red);
```

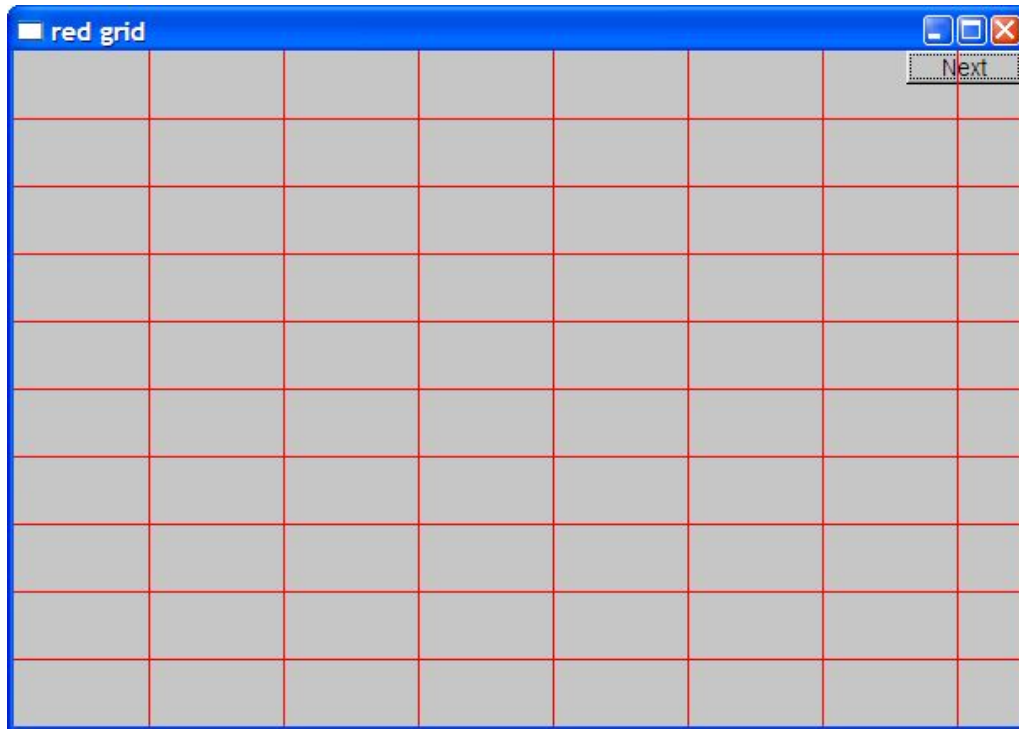

Line_style


```
struct Line_style {
    enum Line_style_type {
        solid=FL_SOLID,          // -----
        dash=FL_DASH,           // - - - -
        dot=FL_DOT,             // .....
        dashdot=FL_DASHDOT,     // - . - .
        dashdotdot=FL_DASHDOTDOT, // - . . .
    };

    Line_style(Line_style_type ss) :s(ss), w(0) { }
    Line_style(Line_style_type lst, int ww) :s(lst), w(ww) { }
    Line_style(int ss) :s(ss), w(0) { }

    int width() const { return w; }
    int style() const { return s; }
private:
    int s;
    int w;
};
```

Example: colored fat dash grid

```
grid.set_style(Line_style(Line_style::dash,2));
```

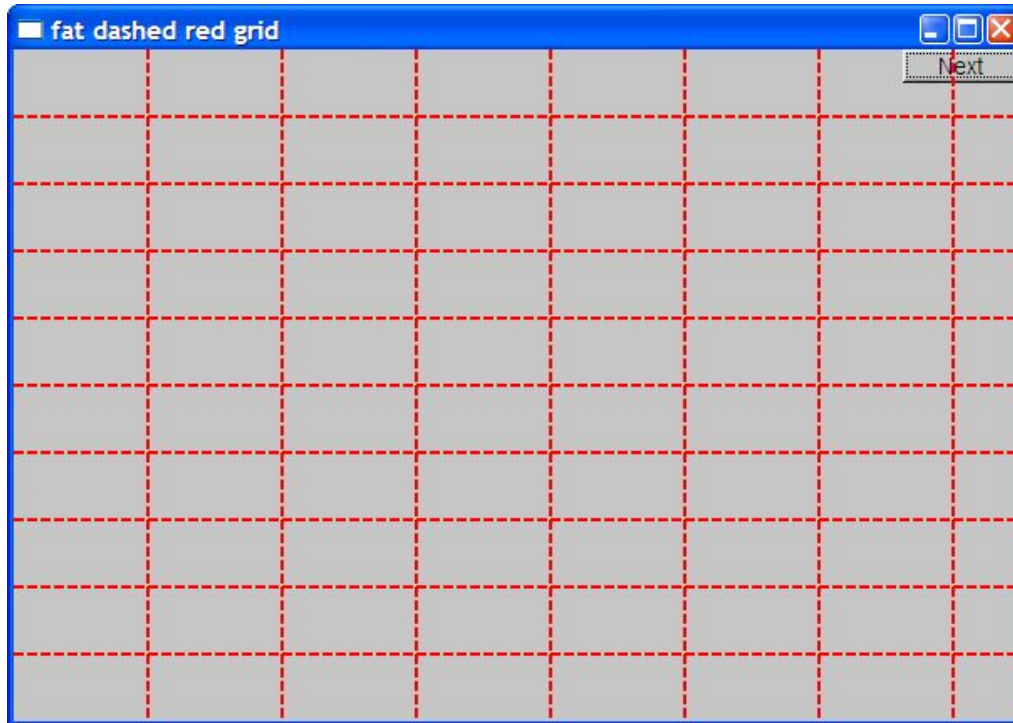


Polylines

```
struct Open_polyline : Shape { // open sequence of lines
    void add(Point p) { Shape::add(p); }
};

struct Closed_polyline : Open_polyline { // closed sequence of lines
    void draw_lines() const
    {
        Open_polyline::draw_lines(); // draw lines (except the closing one)
        // draw the closing line:
        fl_line( point(number_of_points()-1).x,
                point(number_of_points()-1).y,
                point(0).x,
                point(0).y
                );
    }
    void add(Point p) { Shape::add(p); } // not needed (why?)
};
```


Open_polyline

```
Open_polyline opl;  
opl.add(Point(100,100));  
opl.add(Point(150,200));  
opl.add(Point(250,250));  
opl.add(Point(300,200));
```

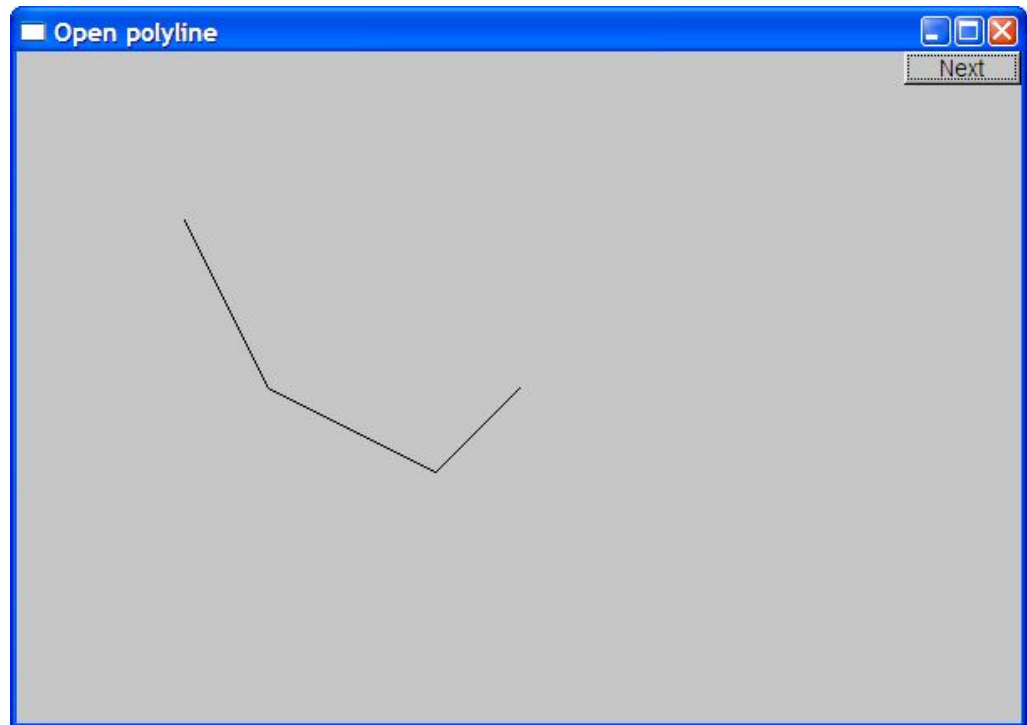


Closed_polyline

```
Closed_polyline cpl;  
cpl.add(Point(100,100));  
cpl.add(Point(150,200));  
cpl.add(Point(250,250));  
cpl.add(Point(300,200));
```

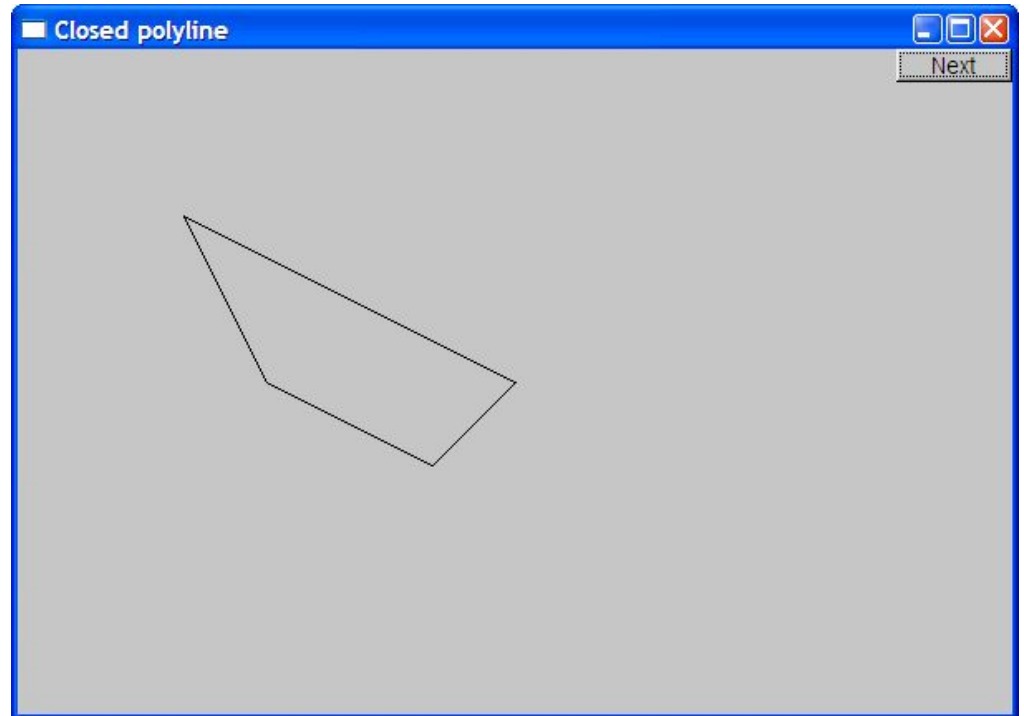

Closed_polyline

```
cpl.add(Point(100,250));
```

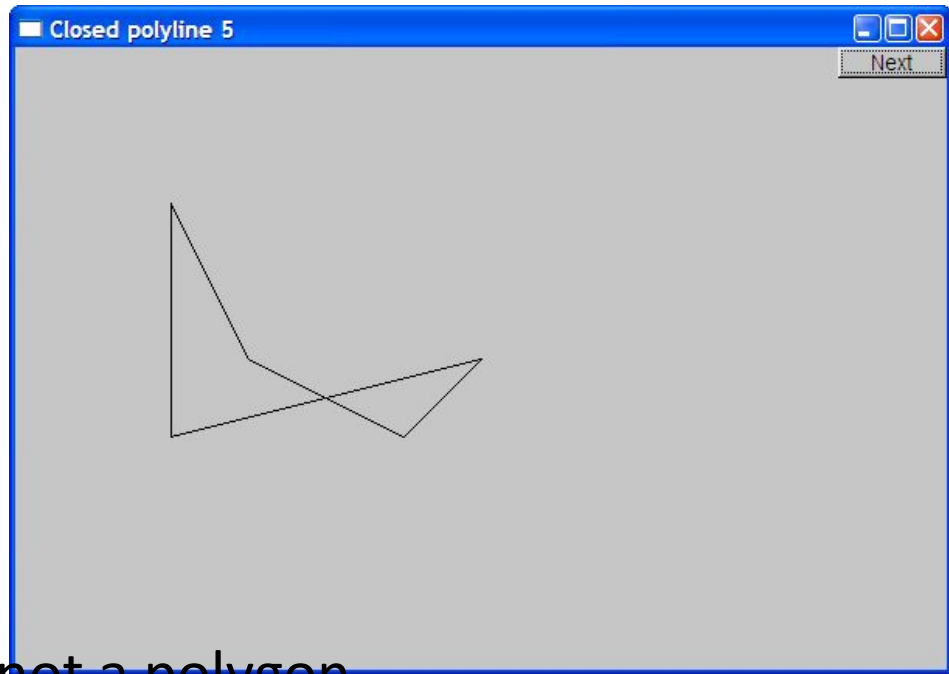

- A **Closed_polyline** is not a polygon
 - some closed_polylines look like polygons
 - A **Polygon** is a **Closed_polyline** where no lines cross
 - A **Polygon** has a stronger invariant than a **Closed_polyline**

Text


```
struct Text : Shape {
    Text(Point x, const string& s) // x is the bottom left of the first letter
        : lab(s),
          fnt(fl_font()), // default character font
          fnt_sz(fl_size()) // default character size
        { add(x); } // store x in the Shape part of the Text object

    void draw_lines() const;

    // ... the usual "getter and setter" member functions ...
private:
    string lab; // label
    Font fnt; // character font of label
    int fnt_sz; // size of characters in pixels
};
```

Add text

```
Text t(Point(200,200), "A closed polyline that isn't a polygon");  
t.set_color(Color::blue);
```

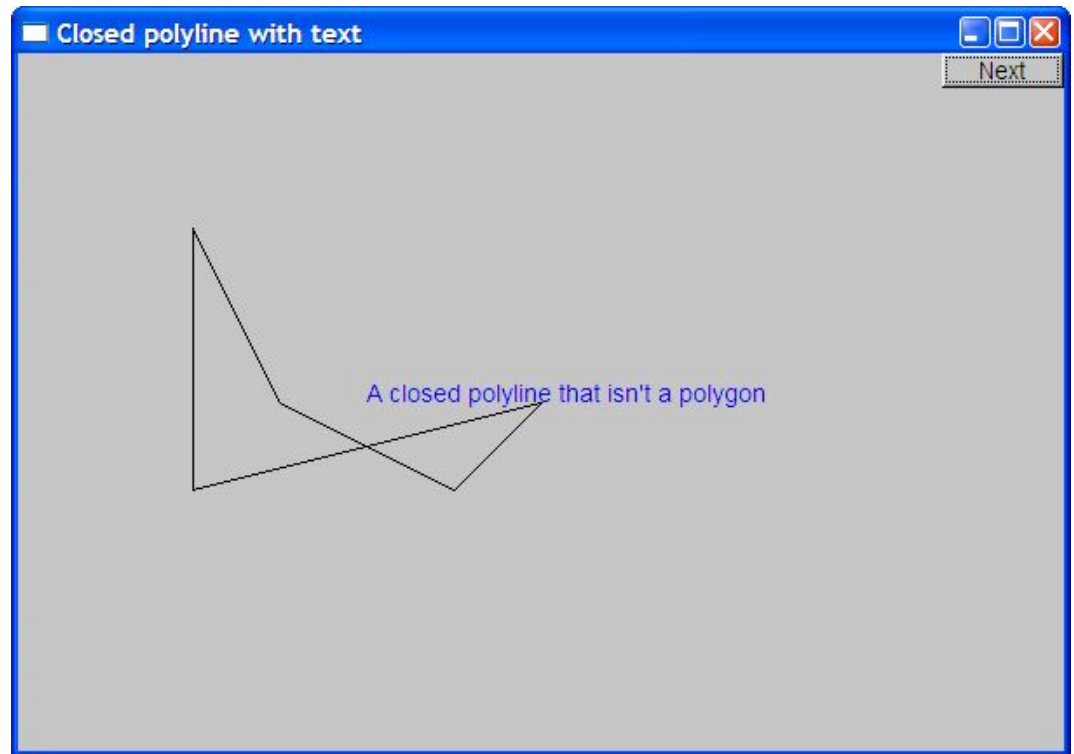


Implementation: Text

```
void Text::draw_lines() const
{
    fl_draw(lab.c_str(), point(0).x, point(0).y);
}
```

// fl_draw() is a basic text drawing function from FLTK

Color matrix

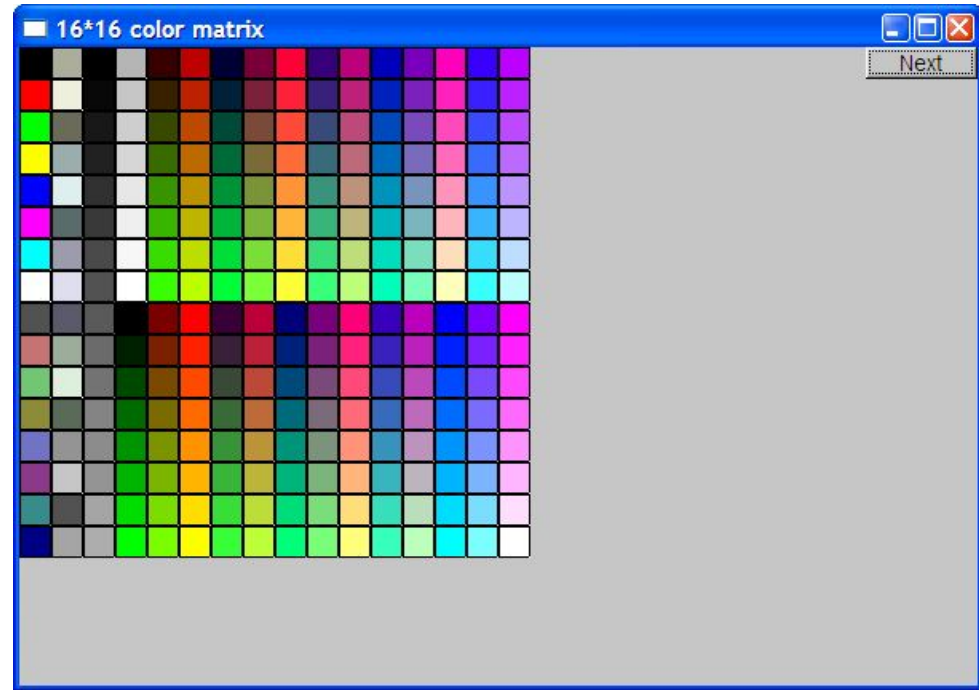

- Let's draw a color matrix
 - To see some of the colors we have to work with
 - To see how messy two-dimensional addressing can be
 - See Chapter 24 for real matrices
 - To see how to avoid inventing names for hundreds of objects

Color Matrix (16*16)

```
Simple_window win20(pt,600,400,"16*16 color matrix");
```

```
Vector_ref<Rectangle> vr; // use like vector
```

```
    // but imagine that it holds references to objects
```

```
for (int i = 0; i<16; ++i) {    // i is the horizontal coordinate
```

```
    for (int j = 0; j<16; ++j) {    // j is the vertical coordinate
```

```
        vr.push_back(new Rectangle(Point(i*20,j*20),20,20));
```

```
        vr[vr.size()-1].set_fill_color(i*16+j);
```


```
        win20.attach(vr[vr.size()-1]);
```

```
    }
```

```
// new makes an object that you can give to a Vector_ref to hold
```

```
// Vector_ref is built using std::vector, but is not in the standard library
```

Color matrix (16*16)

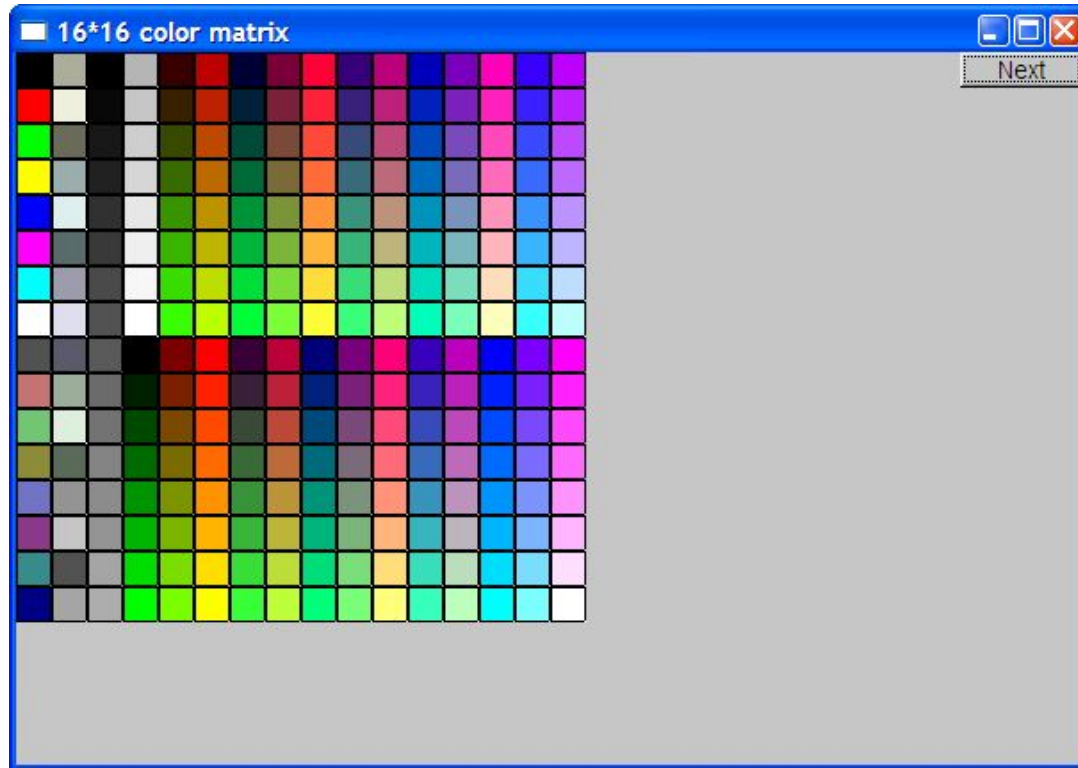

More examples and graphics classes in the book (chapter 13)

Next lecture

- What is class Shape?
- Introduction to object-oriented programming