


Ryspekov's Fibonacci
sequence formula

Global Revival Inc.

June 11, 2017.



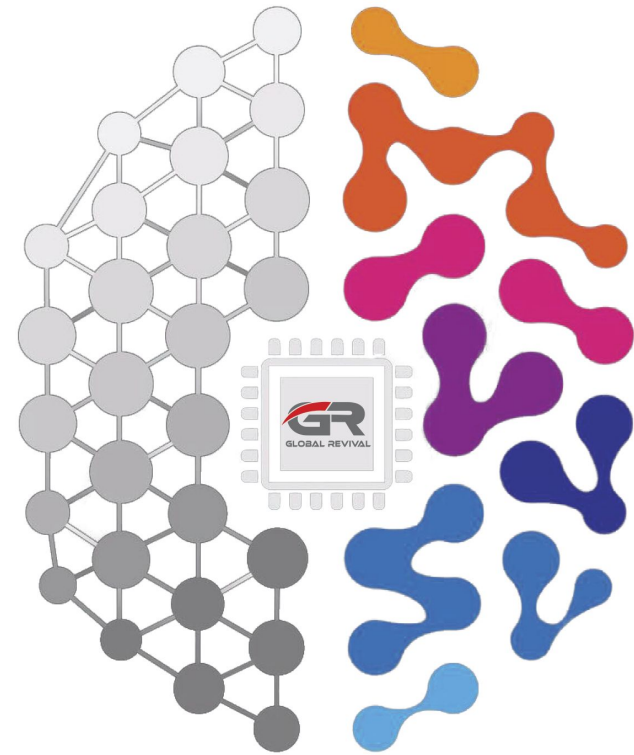

$$S_n = \begin{cases} \sum_{i=1}^n b_i = \frac{b_1 - b_1 q^n}{1 - q} = \frac{b_1 (1 - q^n)}{1 - q}, & \text{if } q \neq 1 \\ nb_1, & \text{if } q = 1 \end{cases}$$

Standard formula of Geometric Series (Finite)



$z=2$

% - Modulo operation

$$S_n = \frac{b1*(1-q^n) + nb1*(z^{(1-q)\%z})}{(1-q) + z^{(1-q)\%z}}$$

Ryspekov's formula of Geometric Series (Finite)

Introduction



- Fibonacci numbers — the elements of a numerical sequence where each subsequent number is the sum of two previous numbers. The Fibonacci numbers are also called the Golden section. The Golden section is used for architecture, art, space exploration, etc.
- My formula will allow easy (low resource consumption at high speed) interact with and/or search the Fibonacci numbers (rational).
- What kind of problems with the existing formulas?



Standard formula's problems

- $F_n = F_{n-1} + F_{n-2}$
- You need to know 2 or more previous numbers
So:
- High memory usage.
- If you have only one Fibonacci number, **you can't find** the next and/or previous numbers using only this number.



Binet's formula's problems

$$\sum_{n=1}^{\max n} F_n = \frac{\phi^n - (-\phi)^{-n}}{\sqrt{5}} = \frac{(1 + \sqrt{5})^n - (1 - \sqrt{5})^n}{2^n \sqrt{5}}$$



Binet's formula's problems

- Speed of search first **n** numbers is very slow because the formula have a lot of operations.
- If you have only one Fibonacci number, **you can't find** the next and/or previous numbers using only this number.

Ryspekov's Fibonacci sequence formula.

Description.



- $f(x) = (2^x) \% 2$
- $g(x)$ – math rounding function (next slide)
- n – max number/count of terms
- $b = n - 1$
- $x_1 = 1$
- $\%$ - modulo operation
- $y = -f(b) + f(b - 1) * (1 - f(b - 1))$
- $z = g(x_{i-1}) + f(i \% 3) * (g(x_{i-1}) \% 2) + (1 - f(i \% 3)) * (f(g(x_{i-1}) \% 2))$



Math Rounding (towards zero)

Math Rounding for this (Fibonacci numbers) task:

$Y = (1.68.... \text{ (using only first } n \text{ numbers of Phi after point)} * (10^n) * x$

$Q = (Y - (Y \bmod (10^n))) / (10^n)$

$g(x) = Q$

Example:

2.434433 will be 2

5.99999 will be 5, and etc.

Computer can do this operation without math operations
(just convert to integer): $(\text{int})(x * (1 + \sqrt{5}) / 2)$

Ryspekov's Fibonacci sequence formula.



$$y + \sum_{i=2}^b k(i)$$

All descriptions on slide 10



Ryspekov's Fibonacci sequence formula (short example for computers) C++ programming language

```

#include<iostream>
#include <cmath>
using namespace std;
int zn(int x){
    x=abs(x);
    x+=4;
    x=x/5;
    x=(int)(pow(2.0,x+0.0))%2;
    return x;
}
int main(){
    int n,b;
    double x;
    cin>>b;
    b-=1;
    x=1;
    n=2;
    while(n<b){
        n++;
        int k=(int)(x*(1+sqrt(5))/2);
        x=k+zn(n%3)*(k%2)+(1-zn(n%3))*zn(k%2);
        cout<<x<<endl;
    }
    x-=zn(b);
    cout<<x;
    return 0;
}

```





I would appreciate, if you can share this formula with others, who can utilize it. I would be happy to help them to realize it in any commercial applications.

Thank you!