

Java 4 WEB

Lesson 12 - Home Task Overview

1. Synchronization?

```
@Override
protected void doGet(HttpServletRequest req, HttpServletResponse resp) throws IOException {
    synchronized (this) {
        var writer = resp.getWriter();
        var session = req.getSession();
        writer.write(FORM);

        boolean serviceIsWorking = (boolean) session.getAttribute("working");
        if (!serviceIsWorking) {
            return;
        }

        var action = req.getParameter("action");
        var actionValue = Integer.parseInt(action);
        var name = req.getParameter("name");
        var value = req.getParameter("value");

        try {
            var operation = Operations.values()[actionValue];
            operation.execute(attributes, name, value);
        } catch (IllegalArgumentException e) {
            session.setAttribute("exception", e);
            resp.sendRedirect("/error");
        }

        printAttributes(resp);
    }
}
```



2. doGet is not the same to doPost

```
@Override  
protected void doPost(HttpServletRequest req, HttpServletResponse resp) throws IOException {  
    doGet(req, resp);  
}
```

3. Tightly coupled code

```
try {  
    var operation = Operations.values()[actionValue];  
    operation.execute(attributes, name, value);  
} catch (IllegalArgumentException e) {  
    session.setAttribute("exception", e);  
    resp.sendRedirect("/error");  
}
```

4. Lookup by ordinal is unsafe

```
try {  
    var operation = Operations.values()[actionValue];  
    operation.execute(attributes, name, value);  
} catch (IllegalArgumentException e) {  
    session.setAttribute("exception", e);  
    resp.sendRedirect("/error");  
}
```

5. Follow single responsibility principle

```
@Override
public void doFilter(ServletRequest request, ServletResponse response, FilterChain chain)
    throws IOException, ServletException {
    var httpServletRequest = (HttpServletRequest) request;
    var session = httpServletRequest.getSession();
    var presentDayOfWeek = LocalDate.now().getDayOfWeek();
    boolean todayIsNotWeekend = presentDayOfWeek != DayOfWeek.SATURDAY
        && presentDayOfWeek != DayOfWeek.SUNDAY;

    session.setAttribute("working", todayIsNotWeekend);
    chain.doFilter(request, response);
}
```

5. Follow single responsibility principle

```
public void doFilter(ServletRequest req, ServletResponse resp, FilterChain chain) throws ServletException, IOException {  
    try {  
        HttpServletRequest request = ((HttpServletRequest) req);  
        if (isMicrosoftEdge(request)) {  
            logger.error("Browser Microsoft Edge not supported.");  
            ServletContext servletContext = req.getServletContext();  
            servletContext.setAttribute(ERROR_STATUS_CODE, 403);  
            servletContext.setAttribute(ERROR_MESSAGE, "Browser Microsoft Edge not supported.");  
            req.getRequestDispatcher("/error").forward(req, resp);  
        } else {  
            chain.doFilter(req, resp);  
        }  
    } catch (Exception ex) {  
        logger.error("", ex);  
        throw ex;  
    }  
}
```

6. Handle errors correctly

HTTP Status 500 ? Internal Server Error

Type Exception Report

Description The server encountered an unexpected condition that prevented it from fulfilling the request.

Exception

```
java.lang.NullPointerException
    org.geekhub.lesson12.task1.error.ServletError.doGet(ServletError.java:20)
    javax.servlet.http.HttpServlet.service(HttpServlet.java:634)
    javax.servlet.http.HttpServlet.service(HttpServlet.java:741)
    org.apache.tomcat.websocket.server.WsFilter.doFilter(WsFilter.java:53)
```

Note The full stack trace of the root cause is available in the server logs.

Apache Tomcat/9.0.14

7. Use correct dependency scope

```
dependencies {  
    compile 'javax.servlet:javax.servlet-api:4.0.0'
```


8. Filtering should block request

```
@WebFilter(filterName = "holidayFilter")
public class HolidayFilter implements Filter {

    @Override
    public void doFilter(ServletRequest request, ServletResponse response, FilterChain chain)
        throws IOException, ServletException {

        LocalDate localDate = LocalDate.now();
        DayOfWeek dayOfWeek = localDate.getDayOfWeek();
        if (dayOfWeek == DayOfWeek.SATURDAY || dayOfWeek == DayOfWeek.SUNDAY) {
            System.out.println("chain.doFilter(request, response);");
        } else {
            chain.doFilter(request, response);
        }
    }
}
```

8. Test your code

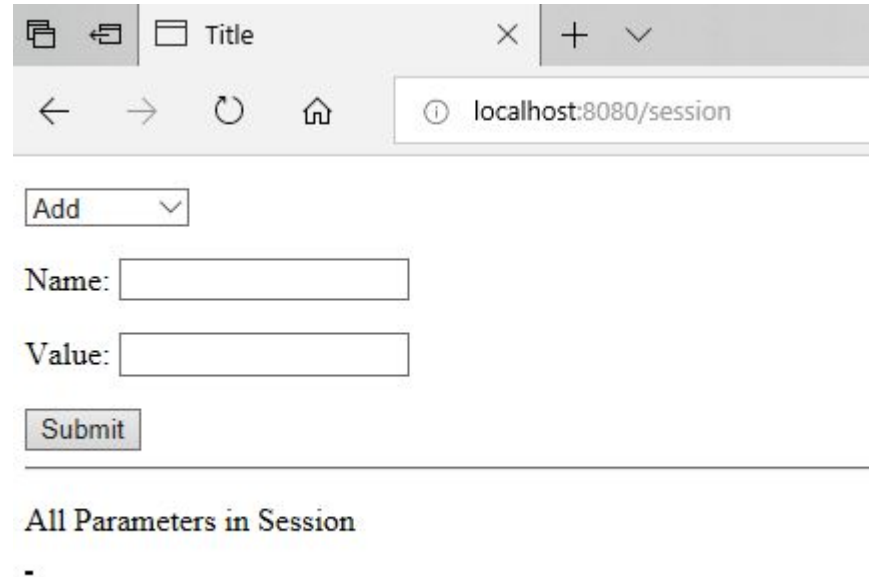

The screenshot shows a web browser window with a single tab titled "Title". The address bar displays "localhost:8080/session". The page content includes a form with the following elements:

- A dropdown menu with the text "Add" and a downward arrow.
- A label "Name:" followed by a text input field.
- A label "Value:" followed by a text input field.
- A "Submit" button.

Below the form, the text "All Parameters in Session" is displayed, followed by a minus sign "-" indicating a collapsed list.

9. Continuous integration should not fail



Student

/ GeekHub8



Reporter

Java for Web project for Geekhub, Season 8

★ 0

🔗 0

🔧 0

📄 20



Updated 13 hours ago

10. Useless code

```
@WebFilter(filterName = "TimeExecutingFilter")
public class TimeExecutingFilter implements Filter {
    public void destroy() {
    }

    public void doFilter(ServletRequest req, ServletResponse resp, FilterChain chain) throws ServletException, IOException {...}

    public void init(FilterConfig config) throws ServletException {
    }
}
```

```
default public void init(FilterConfig filterConfig) throws ServletException {}
```

11. Prefer polymorphic solutions

```
private void invoke(HttpServletRequest req, HttpServletResponse resp) {  
    String actionParameter = req.getParameter("action");  
    switch (actionParameter) {  
        case "empty":  
            emptyOperation(req, resp);  
            break;  
        case "add":  
            addAttribute(req, resp);  
            break;  
        case "update":  
            updateAttribute(req, resp);  
            break;  
        case "invalidate":  
            invalidateAttribute(req);  
            break;  
        case "remove":  
            removeAttribute(req, resp);  
            break;  
    }  
}
```

12. Where is request execution info?

```
public class LoggingFilter implements Filter {
    private static Logger log = Logger.getLogger(LoggingFilter.class.getName());

    @Override
    public void doFilter(ServletRequest request, ServletResponse response, FilterChain chain)
        throws IOException, ServletException {
        final HttpSession session = ((HttpServletRequest) request).getSession();

        final long creationTime = session.getCreationTime();
        final LocalDateTime creationLocalDateTime = Instant.ofEpochMilli(creationTime).atZone(ZoneId.systemDefault())
            .toLocalDateTime();

        final long lastAccessedTime = session.getLastAccessedTime();
        final LocalDateTime lastAccessedLocalDateTime = Instant.ofEpochMilli(lastAccessedTime)
            .atZone(ZoneId.systemDefault()).toLocalDateTime();

        log.info("Creation time: " + creationLocalDateTime);
        log.info("Last Accessed Time: " + lastAccessedLocalDateTime);
        log.info("Duration: " + Duration.between(creationLocalDateTime, lastAccessedLocalDateTime).toMillis()
            + " seconds");

        chain.doFilter(request, response);
    }
}
```


13. Use correct http methods

```
"<form name=\"actionForm\" action=\"session\" method=\"GET\">\n" +  
  "<p>Action:\n" +  
    "<select name=\"\" + ACTION + \"\">\n" +  
      "<option value=\"\"></option>\n" +  
      "<option value=\"\" + ADD + \"\">Add</option>\n" +  
      "<option value=\"\" + UPDATE + \"\">Update</option>\n" +  
      "<option value=\"\" + INVALIDATE + \"\">Invalidate</option>\n" +  
      "<option value=\"\" + REMOVE + \"\">Remove</option>\n" +  
    "</select>\n" +  
  "</p>\n" +  
  "\n" +  
  "<p>Name:\n" +  
    "<input type=\"text\" name=\"\" + NAME + \"\"/>\n" +  
  "</p>\n" +  
  "\n" +  
  "<p>Value:\n" +  
    "<input type=\"text\" name=\"\" + VALUE + \"\"/>\n" +  
  "</p>\n" +  
  "\n" +  
  "<th><input type=\"submit\" value=\"submit\"/></th>\n" +  
  "</form>";
```


14. Modification of input arguments is bad

```
public enum Operations {  
    ADD {  
        @Override  
        public void execute(Map<String, String> attributes, String key, String value) {  
            if (key.isBlank() || value.isBlank()) {  
                throw new IllegalArgumentException("Key or value not entered.");  
            }  
  
            if (attributes.containsKey(key)) {  
                throw new IllegalArgumentException("Attribute with current name already exists.");  
            }  
  
            attributes.put(key, value);  
        }  
    },  
}
```

15. Only single instance of Servlet Context

```
private void setTimeAttributes(HttpServletRequest request){  
    Date dateFinish = new Date();  
    ServletContext servletContext = request.getServletContext();  
    servletContext.setAttribute("FinishTime", String.valueOf(dateFinish.getTime()));  
    String startTime = servletContext.getAttribute("StartTime").toString();  
    long startTimeLong = Long.valueOf(startTime);  
    long resultTime = dateFinish.getTime() - startTimeLong;  
    servletContext.setAttribute("DurationTime", String.valueOf(resultTime));  
}
```